


1

2


3

4


5





SEC.A-A



SEC.B-B



SEC.C-C

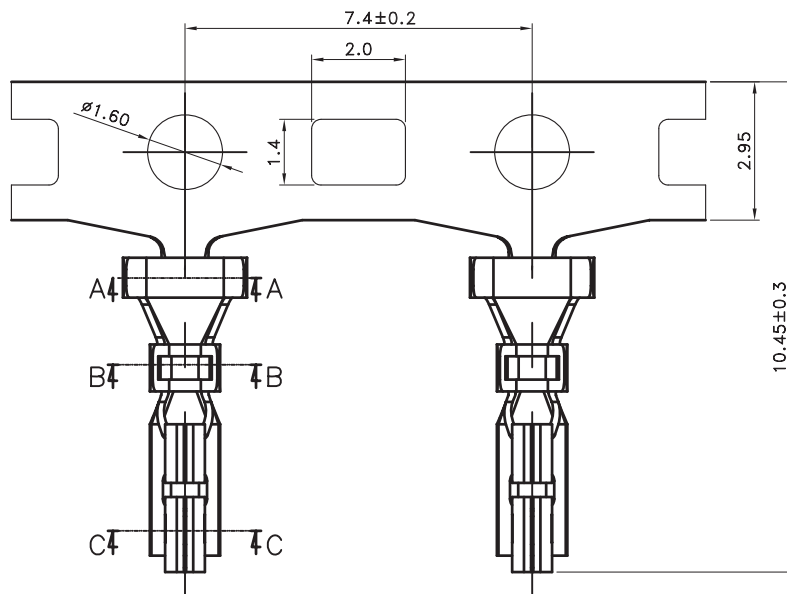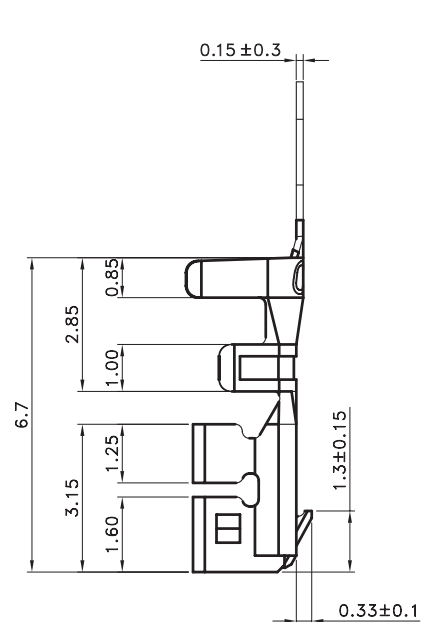

## TECHNICAL CHARACTERISTICS

## MATERIAL

CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: TIN  
 QUALITY CLASS: 25 MATING CYCLES  
 PITCH: 2.00 MM

## ENVIRONMENTAL

OPERATING TEMPERATURE: -25 UP TO 85°C  
 COMPLIANCE: LEAD FREE AND ROHS

## ELECTRICAL

CURRENT RATING: 3 A  
 WORKING VOLTAGE: 250 VAC  
 CONTACT RESISTANCE: 20 mOHM MAX

## WIRE DIMENSION

AWG: AWG 22 - 28

## PACKAGING

10 KPCS REEL

RoHS Compliant

G			
F			
E	25-JAN-16	TPK UPDATE	AK
D	24-SEP-13	TOL REVIEW	QL
C	06-AUG-13	CHARACTERISTIC	QL
B	29-JUL-13	DWG & CARAC	QL
A	15-MAY-12	PDF	GG
REV	DATE	FILE	BY

PROJECTION:



APPROVAL: BBu

GENERAL TOLERANCE

.X = +/- 0.3

.XX = +/- 0.2



UNIT: MM

SCALE:

SHEET: 1/3


DRAW: MIKE



DESCRIPTION: 2.00 MM DUAL ROW FEMALE CRIMP TERMINAL

WERI PART NO: 624 001 137 22

SIZE

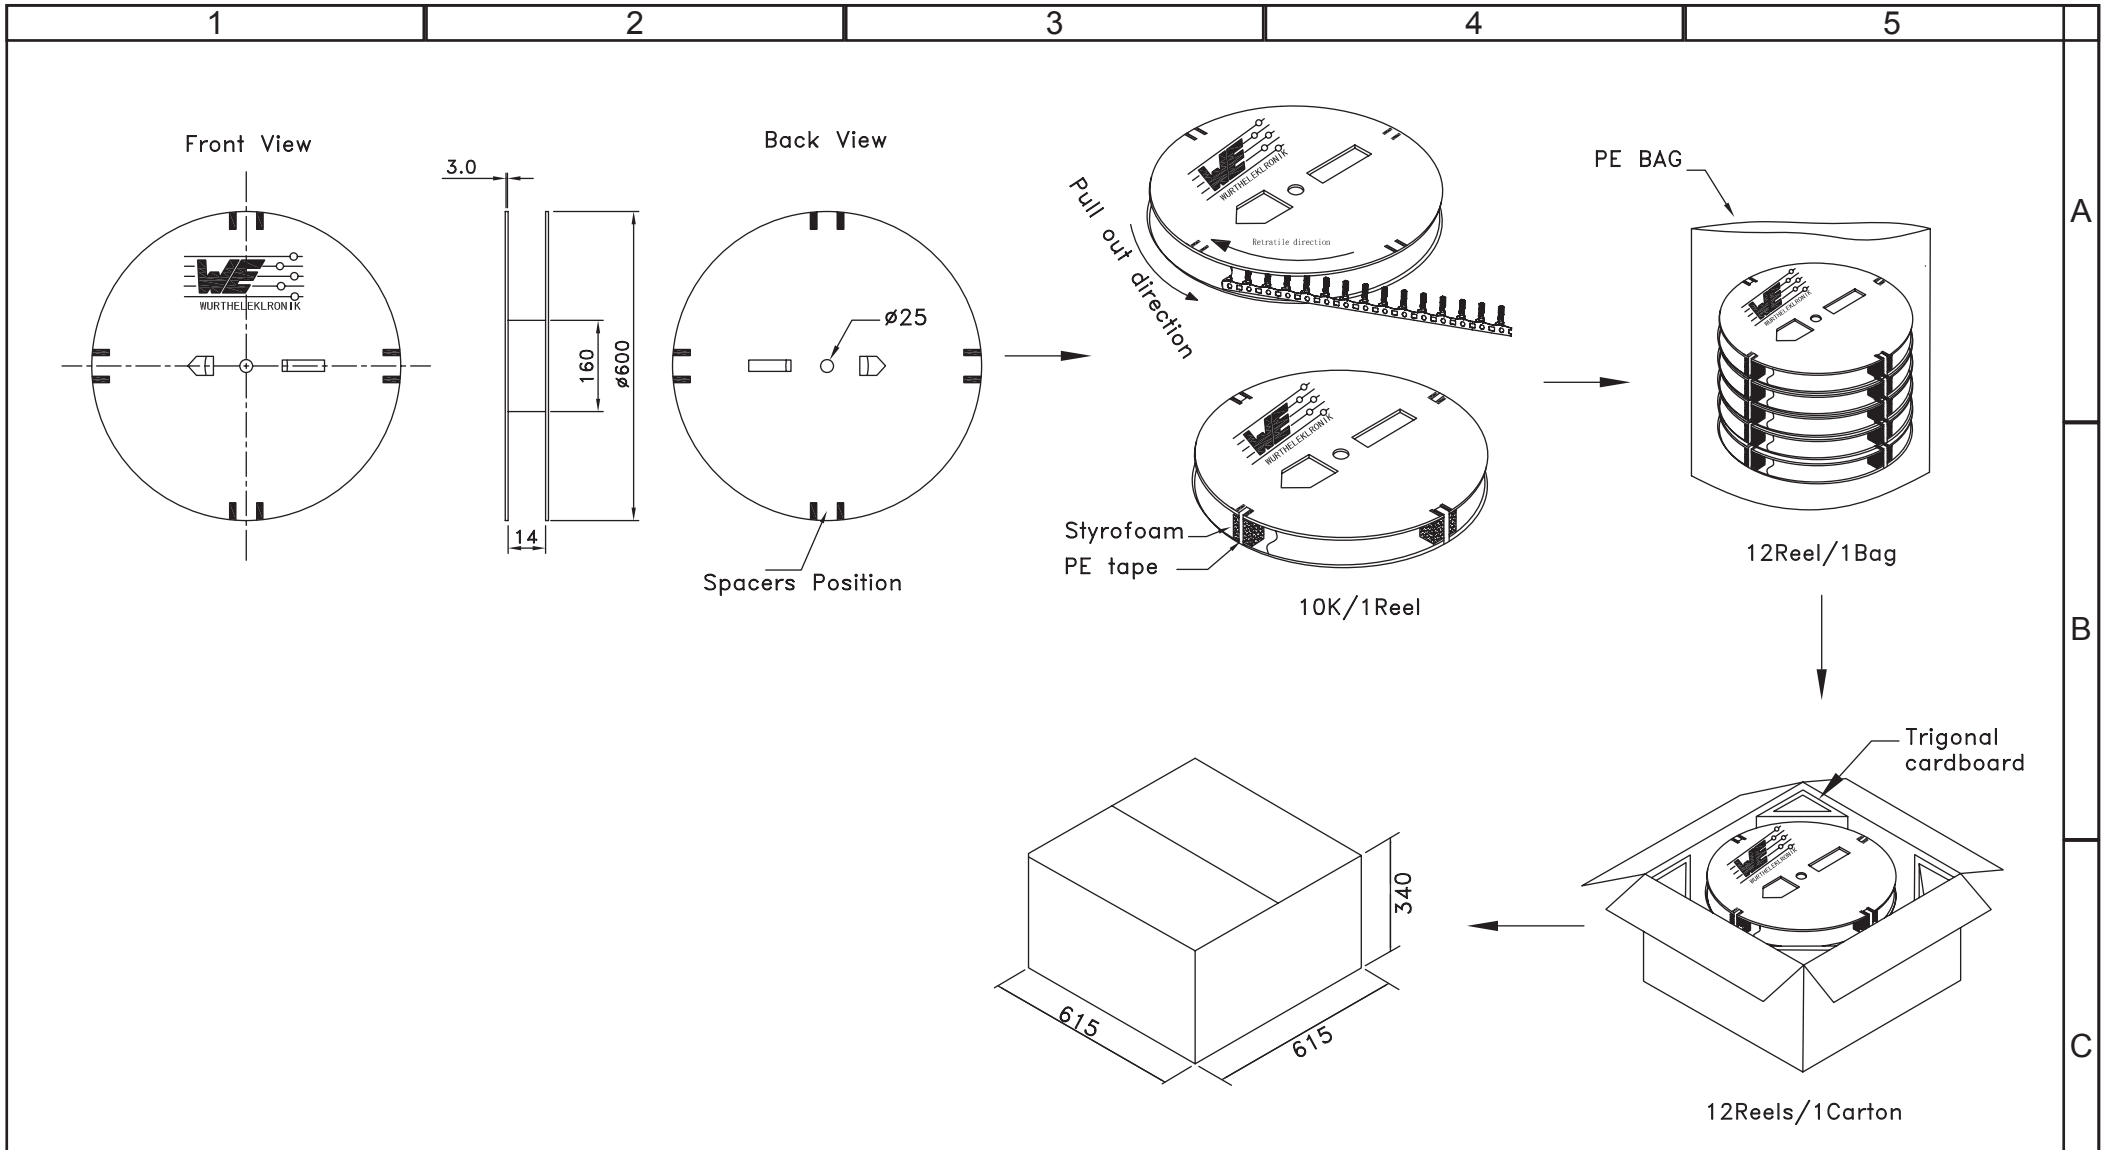A4



RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: 2.00 MM DUAL ROW FEMALE CRIMP TERMINAL	SIZE <b>A4</b>
G								
F								
E								
D								
C				APPROVAL: BBu	UNIT: MM	DESCRIPTION: 2.00 MM DUAL ROW FEMALE CRIMP TERMINAL		
B					SCALE:	DESCRIPTION: 2.00 MM DUAL ROW FEMALE CRIMP TERMINAL		
A					SHEET: 2/3	DESCRIPTION: 2.00 MM DUAL ROW FEMALE CRIMP TERMINAL		
REV	DATE	FILE	BY		DRAW: MIKE	WERI PART NO: 624 001 137 22		

1

2

3

4

5

## Cautions and Warnings:

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

A

B

C

RoHS Compliant

G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		
F							
E							
D							
C				APPROVAL: JC	UNIT: MM	DESCRIPTION: DISCLAIMER	SIZE <b>A4</b>
B					SCALE:		
A	10-SEP-14	PDF	QL		SHEET: 3/3	WERI PART NO: DISCLAIMER	
REV	DATE	FILE	BY		DRAW: QL		

D