
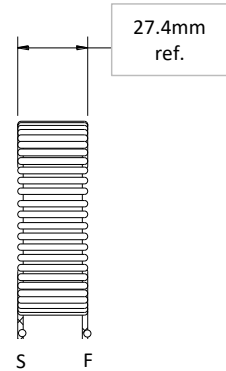


CUSTOMER TERMINAL	RoHS	LEAD(Pb)--FREE
Sn 96%, Ag 4%	Yes	Yes

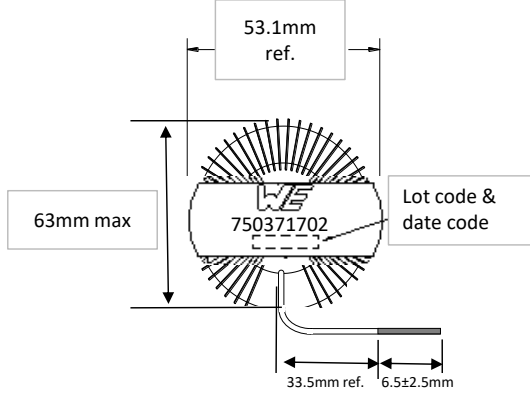

ELECTRICAL SPECIFICATIONS @ 25° C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	S-F @20°C	0.030 ohms max.
INDUCTANCE	S-F 10kHz, 100mV, Ls	350.00µH ±15%




Image and dimensions to be updated upon release.

ALD 7/26/2023

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety standard undefined

Preliminary

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability. Marking method, font and color may vary on preproduction samples.

DFM	SP	Packaging Specifications		Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
DATE	9/20/2023	Method: Tray		Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]		
ENG	ALD	PKG-1287	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	SPECIFICATION SHEET 1 OF 1	
REV.	00					
DATE	10/16/2023	www.we-online.com/midcom				