



USER MANUAL

PROTEUS-II

2608011024010 / 2608011124010

VERSION 1.17

OCTOBER 11, 2024

WÜRTH ELEKTRONIK MORE THAN YOU EXPECT

MUST READ

Check for firmware updates

Before using the product, make sure you use the most recent firmware version, data sheet, and user manual. This is especially important for Wireless Connectivity products that were not purchased directly from Würth Elektronik eiSos. A firmware update on these respective products may be required.

We strongly recommend including the possibility of a firmware update in the customer system design.

Revision history

Manual version	FW version	HW version	Notes	Date
1.1	1.1.0	2.1	<ul style="list-style-type: none"> Initial release 	November 2018
1.2	1.1.0	2.1	<ul style="list-style-type: none"> Description of the new peripheral only mode function in chapter 10 Corrected CMD_SET_CNF message in chapter 8 Updated description of firmware update using the OTA bootloader 	January 2019
1.3	1.1.0	2.1	<ul style="list-style-type: none"> Added chapter Reference design and chapter Information for explosion protection 	March 2019
1.4	1.1.0	2.1	<ul style="list-style-type: none"> Updated references to new AppNote name structure. Updated important notes, legal notice & license terms chapters. 	June 2019
1.5	1.1.0	2.1	<ul style="list-style-type: none"> Corrected information on brownout and maximum TX power in chapter Electrical specifications Updated label in chapter General labeling information Corrected example of DTM RX test in chapter CMD_DTM_REQ Updated address of Division Wireless Connectivity & Sensors location 	October 2019

1.6	1.1.0	2.1	<ul style="list-style-type: none"> Removed -30dBm as valid RF_TXPower value 	December 2019
1.7	1.1.0	2.1	<ul style="list-style-type: none"> Correction of Value amount of inductivity for explosion protection 	February 2020
1.8	1.1.0	2.1	<ul style="list-style-type: none"> Added Declaration of conformity for Japan. Limitation of the RF_DeviceName to a maximum of 31 bytes Added Annex Additional CRC8 Information and Example code for host integration 	June 2020
1.9	1.1.0	2.1	<ul style="list-style-type: none"> Updated Declaration of EU conformity to latest Version of EN 300 328 after successfully passing corresponding delta test in chapter Regulatory compliance information. Added package name in chapter Footprint WE-FP-4. 	October 2020
1.10	1.1.0	2.1	<ul style="list-style-type: none"> Updated Declaration of EU conformity Regulatory compliance information. 	December 2020

1.11	1.3.0	2.2	<ul style="list-style-type: none"> Removed 2608011024019 and 2608011124019 from Ordering information as there are no longer pre-cuts available. The modules are available in all quantities as cut tape. Added information concerning firmware version 1.3.0, see chapter Firmware history. Added overview of helpful application notes Updated document style 	July 2022
1.12	1.3.0	2.2	<ul style="list-style-type: none"> Added chapter Internal antenna radiation characteristics Updated chapter Firmware update steps using the nRF Device Firmware Update app Updated meta data 	May 2023
1.13	1.3.0	2.2	<ul style="list-style-type: none"> Added certificates in addition to the required compliance statements in chapter Regulatory compliance information. 	June 2023
1.14	1.3.0	2.2	<ul style="list-style-type: none"> Added new radio certification for India in chapter 23.11. 	August 2023
1.15	1.3.0	2.2	<ul style="list-style-type: none"> Added chapter Known issues and known issue KI-003 	September 2023

1.16	1.3.0	2.2	<ul style="list-style-type: none"> Added NCC compliance statement for Taiwan chapter 23.13 	February 2024
1.17	1.3.0	2.2	<ul style="list-style-type: none"> Added chapter Product testing Added chapter Important notice UKCA Renamed Bluetooth® listing to Bluetooth® qualification Update module action byte description in CMD_GETSTATE_CNF Updated chapter General labeling information 	October 2024

★ For firmware history see chapter Firmware history

Abbreviations

Abbreviation	Name	Description
BTMAC		Bluetooth® conform MAC address of the module used on the RF-interface.
CS	Checksum	Byte wise XOR combination of the preceding fields.
DTM	Direct test mode	Mode to test Bluetooth® specific RF settings.
GAP	Generic Access Profile	The GAP provides a basic level of functionality that all Bluetooth® devices must implement.
I/O	Input/output	Pinout description.
LPM	Low power mode	Mode for efficient power consumption.
MAC		MAC address of the module.
MTU	Maximum transmission unit	Maximum packet size of the Bluetooth® connection.
Payload		The intended message in a frame / package.
RF	Radio frequency	Describes wireless transmission.
RSSI	Receive Signal Strength Indicator	The RSSI indicates the strength of the RF signal. Its value is always printed in two's complement notation.
Soft device		Operating system used by the nRF52 chip.
	User settings	Settings to configure the module. Any relation to a specific entry in the user settings is marked in a special font and can be found in chapter 8.
UART	Universal Asynchronous Receiver Transmitter	Allows the serial communication with the module.
[HEX] 0xhh	Hexadecimal	All numbers beginning with 0x are hexadecimal numbers. All other numbers are decimal, unless stated otherwise.

Contents

Overview of helpful application notes	13
1. Introduction	15
1.1. Operational description	15
1.1.1. Key features	15
1.1.2. Connectivity	16
1.2. Block diagram	17
1.3. Ordering information	18
2. Electrical specifications	19
2.1. Recommended operating conditions	19
2.2. Absolute maximum ratings	19
2.3. Power consumption	20
2.3.1. Static	20
2.3.2. Dynamic	21
2.4. Radio characteristics	24
2.5. Pin characteristics	25
3. Pinout	26
4. Quick start	28
4.1. Minimal pin configuration	28
4.2. Power up	28
4.3. Quickstart example	29
5. Functional description	33
5.1. Operation modes	33
5.2. Radio module states	33
5.3. State indication using the LED pins	35
5.4. Sleep mode	35
5.5. Identification of a Proteus-II device on the radio	36
5.6. Connection based data transmission, with or without security	36
5.6.1. Further information for a secure connection setup	37
5.6.1.1. Just works mode	37
5.6.1.2. StaticPasskey mode	40
5.6.1.3. Bonding	43
5.7. Unidirectional connectionless data transmission using Beacons	47
5.8. Energy-efficient distance estimation solutions	48
5.9. Configure the module for low power consumption	48
5.10. Start the direct test mode (DTM)	49
5.11. Using the 2MBit phy	52
6. Host connection	53
6.1. Serial interface: UART	53

7. The command interface	54
7.1. Scan for other modules in range	56
7.1.1. CMD_SCANSTART_REQ	56
7.1.2. CMD_SCANSTOP_REQ	56
7.1.3. CMD_GETDEVICES_REQ	57
7.1.3.1. Example 1	58
7.1.4. CMD_RSSI_IND	58
7.2. Setup connections	60
7.2.1. CMD_CONNECT_REQ	60
7.2.2. CMD_CONNECT_IND	60
7.2.3. CMD_SECURITY_IND	60
7.2.4. CMD_CHANNELOPEN_RSP	61
7.2.5. CMD_DISCONNECT_REQ	61
7.2.6. CMD_DISCONNECT_IND	62
7.2.7. CMD_PHYUPDATE_REQ	62
7.2.8. CMD_PHYUPDATE_IND	63
7.2.9. CMD_PASSKEY_REQ	63
7.2.10. CMD_PASSKEY_IND	64
7.2.11. CMD_GETBONDS_REQ	64
7.2.11.1. Example 1	65
7.2.12. CMD_DELETEBONDS_REQ	65
7.2.12.1. Example 1	66
7.2.12.2. Example 2	66
7.3. Transmit and receive data	67
7.3.1. CMD_DATA_REQ	67
7.3.2. CMD_TXCOMPLETE_RSP	67
7.3.3. CMD_DATA_IND	68
7.3.4. CMD_SETBEACON_REQ	68
7.3.5. CMD_BEACON_IND	68
7.4. Configuring the module and modifying the device settings	70
7.4.1. CMD_SET_REQ	70
7.4.1.1. Example 1	71
7.4.1.2. Example 2	71
7.4.2. CMD_GET_REQ	72
7.4.2.1. Example 1	72
7.5. Manage the device state	73
7.5.1. CMD_GETSTATE_REQ	73
7.5.1.1. Example 1	73
7.5.2. CMD_RESET_REQ	74
7.5.3. CMD_SLEEP_REQ	74
7.5.4. CMD_SLEEP_IND	75
7.5.5. CMD_FACTORYRESET_REQ	75
7.5.6. CMD_UARTDISABLE_REQ	76
7.5.7. CMD_UARTENABLE_IND	77
7.5.8. CMD_BOOTLOADER_REQ	77
7.6. Run the Bluetooth test modes	79
7.6.1. CMD_DTMSTART_REQ	79

7.6.2.	CMD_DTM_REQ	79
7.6.2.1.	Example: Transmission, 16 times 0x0F, channel 0	81
7.6.2.2.	Example: Receiver, channel 0	82
7.6.2.3.	Example: Transmission, carrier test, channel 0	82
7.6.2.4.	Example: Set TX power to -4 dBm	83
7.7.	Other messages	84
7.7.1.	CMD_ERROR_IND	84
7.8.	Message overview	85
8.	User settings - Module configuration values	88
8.1.	FS_DeviceInfo: Read the chip type and OS version	88
8.1.1.	Example 1	89
8.2.	FS_FWVersion: Read the firmware version	90
8.2.1.	Example 1	90
8.3.	FS_MAC: Read the MAC address	91
8.3.1.	Example 1	91
8.4.	FS_BTMAC: Read the Bluetooth conform MAC address	92
8.4.1.	Example 1	92
8.5.	FS_SerialNumber: Read the serial number of the module	93
8.5.1.	Example 1	93
8.6.	RF_DeviceName: Modify the device name	94
8.6.1.	Example 1	94
8.6.2.	Example 2	94
8.7.	RF_StaticPasskey: Modify the static passkey	96
8.7.1.	Example 1	96
8.7.2.	Example 2	96
8.8.	RF_SecFlags: Modify the security settings	97
8.8.1.	Example 1	98
8.8.2.	Example 2	98
8.9.	RF_SecFlagsPerOnly: Modify the security settings (Peripheral only mode) . . .	100
8.9.1.	Example 1	100
8.9.2.	Example 2	100
8.10.	RF_ScanFlags: Modify the scan behavior	101
8.10.1.	Example 1	101
8.10.2.	Example 2	101
8.11.	RF_BeaconFlags: Interpret the advertising data	103
8.11.1.	Example 1	104
8.11.2.	Example 2	104
8.12.	RF_AdvertisingTimeout: Modify the advertising timeout	105
8.12.1.	Example 1	105
8.12.2.	Example 2	105
8.13.	RF_AdvertisingFlags: Configure the advertising packet	106
8.13.1.	Example 1	106
8.13.2.	Example 2	106
8.14.	RF_ScanFactor: Modify the scan factor	108
8.14.1.	Example 1	108
8.14.2.	Example 2	108

8.15. RF_ScanTiming: Modify the scan timing	109
8.15.1. Example 1	110
8.15.2. Example 2	110
8.16. RF_ConnectionTiming: Modify the connection timing	111
8.16.1. Example 1	112
8.16.2. Example 2	113
8.17. RF_TXPower: Modify the output power	114
8.17.1. Example 1	114
8.17.2. Example 2	114
8.18. RF_SPPBaseUUID: Configure the SPP base UUID	115
8.18.1. Example 1	115
8.18.2. Example 2	115
8.19. RF_Appearance: Configure the appearance of the device	117
8.19.1. Example 1	117
8.19.2. Example 2	117
8.20. UART_BaudrateIndex: Modify the UART speed	118
8.20.1. Example 1	118
8.20.2. Example 2	119
8.21. UART_Flags: Configure the UART	120
8.21.1. Example 1	120
8.21.2. Example 2	120
8.22. CFG_Flags: Configure the module	122
8.22.1. Example 1	122
8.22.2. Example 2	122
8.23. DIS_ManufacturerName: Configure the manufacturer name	124
8.23.1. Example 1	124
8.23.2. Example 2	124
8.24. DIS_ModelNumber: Configure the model number	126
8.24.1. Example 1	126
8.24.2. Example 2	126
8.25. DIS_SerialNumber: Configure the serial number	128
8.25.1. Example 1	128
8.25.2. Example 2	128
8.26. DIS_HWVersion: Configure the HW version	130
8.26.1. Example 1	130
8.26.2. Example 2	130
8.27. DIS_SWVersion: Configure the SW version	132
8.27.1. Example 1	132
8.27.2. Example 2	132
8.28. DIS_Flags: Configure the device information service	134
8.28.1. Example 1	134
8.28.2. Example 2	134
9. Timing parameters	138
9.1. Reset and sleep	138
9.2. Bluetooth LE timing parameters	138
9.3. Connection establishment	138
9.4. Connection based data transmission	139

10. Peripheral only mode	140
10.1. Reasons to use the peripheral only mode	140
10.2. How to use the peripheral only mode	140
10.3. More information	141
10.3.1. Radio	141
10.3.2. UART	141
11. Customizing the Proteus-II	143
11.1. DIS - Device information service	143
11.2. UUID	143
11.3. Appearance	143
12. Custom firmware	144
12.1. Custom configuration of standard firmware	144
12.2. Customer specific firmware	144
12.3. Customer firmware	144
12.4. Contact for firmware requests	145
13. Firmware update	146
13.1. Firmware flashing using the SWD interface	146
13.2. Firmware update using the Proteus-II OTA bootloader	146
13.2.1. Firmware update steps using the nRF Device Firmware Update app	148
14. Firmware history	149
14.1. Known issues	149
15. Design in guide	151
15.1. Advice for schematic and layout	151
15.2. Designing the antenna connection	153
15.3. Antenna solutions	154
15.3.1. Wire antenna	155
15.3.2. Chip antenna	155
15.3.3. PCB antenna	155
15.3.4. Antennas provided by Würth Elektronik eiSos	156
15.3.4.1. 2600130021 - Himaia dipole antenna	156
16. Reference design	157
16.1. Schematic	158
16.2. Layout	159
16.3. Internal antenna radiation characteristics	160
17. Manufacturing information	161
17.1. Moisture sensitivity level	161
17.2. Soldering	161
17.2.1. Reflow soldering	161
17.2.2. Cleaning	162
17.2.3. Potting and coating	163
17.2.4. Other notations	163
17.3. ESD handling	163

17.4. Safety recommendations	164
18. Product testing	165
18.1. Würth Elektronik eiSos in-house production tests	165
18.2. EMS production tests	165
19. Physical specifications	167
19.1. Dimensions	167
19.2. Weight	167
19.3. Module drawing	168
19.4. Footprint WE-FP-4	169
19.5. Antenna free area	169
20. Marking	170
20.1. Lot number	170
20.2. General labeling information	171
21. Information for explosion protection	172
22. Bluetooth SIG listing/qualification	173
23. Regulatory compliance information	174
23.1. Important notice EU	174
23.2. Important notice UKCA	174
23.3. Important notice FCC	174
23.4. Conformity assessment of the final product	174
23.5. Exemption clause	174
23.6. EU Declaration of conformity	176
23.7. FCC Compliance Statement (US)	177
23.7.1. FCC certificate	177
23.8. IC Compliance Statement (Canada)	178
23.8.1. IC certificate	178
23.9. TELEC radio law approval (Japan)	179
23.9.1. Label	179
23.9.2. Certified antennas	180
23.9.3. TELEC certificate	181
23.10. FCC and IC requirements to OEM integrators	183
23.10.1. Pre-certified antennas	184
23.11. ETA-WPC (India)-Proteus-II (2608011024010)	185
23.11.1. ETA-WPC certificate	185
23.12. ETA-WPC (India)-Proteus-II (2608011124010)	187
23.12.1. ETA-WPC certificate	187
23.13. NCC Compliance Statement (Taiwan)	189
23.13.1. NCC certificate	189
24. References	191
25. Important notes	192

26. Legal notice	192
27. License terms	193
A. Additional CRC8 Information	197
A.1. Example CRC8 Implementation	197
A.2. CRC8 Test Vectors	197
B. Example code for host integration	198

Overview of helpful application notes

Application note ANR004 - Peripheral only mode

<http://www.we-online.com/ANR004>

The Bluetooth® LE modules Proteus-I,-II,-III provide the so called "peripheral only mode", that supports a serial cable replacement by offering a transparent UART bridge functionality. This document explains how to set the module into the corresponding operation mode and how to establish a Bluetooth® LE connection to a Bluetooth® LE enabled central device.

Application note ANR005 - Proteus-II Advanced developer guide

<http://www.we-online.com/ANR005>

This advanced developer guide covers the details on the Proteus-II radio module that are required to implement compatible App for smart devices. It covers the documentation on the SPP-like Bluetooth® LE profile, the used protocols and data coding for arbitrary user payload. In addition all information required to develop a custom firmware on the Proteus module hardware platform are provided within.

Application note ANR006 - Proteus High throughput mode

<http://www.we-online.com/ANR006>

The Proteus-II and Proteus-III provide the so called "high throughput mode". This mode sends several data packets per connection interval to increase the data throughput to a remote Bluetooth® LE device. This application note describes how to set the radio module in this mode, and how to test it in a module-to-module setup. It presents measurements and test scenarios for throughput measurements.

Application note ANR008 - Wireless Connectivity Software Development Kit

<http://www.we-online.com/ANR008>

To ease the integration of the Würth Elektronik eiSos radio modules into an application, Würth Elektronik eiSos offers the corresponding Software Development Kit (SDK) for most commonly used host processors. This SDK contains drivers and examples in C-code to communicate with the corresponding radio module. This application note shows which SDKs are available and describes how to download and use them.

Application note ANR010 - Range estimation

<http://www.we-online.com/ANR010>

This application note presents the two most used mathematical range estimation models, Friis and two ray ground reflection, and its implementation in the range estimation tool of the RED-EXPERT.

Application note ANR014 - Proteus-I,-II,-III Quickstart

<http://www.we-online.com/ANR014>

This application note describes how to set up a Bluetooth® LE connection between one of a Proteus-I,-II,-III and a Bluetooth® LE enabled device, like a smart phone. Furthermore the data transmission via Bluetooth® LE is presented.

Application note ANR026 - Proteus beacons

<http://www.we-online.com/ANR026>

Besides the standard Bluetooth® LE connection based data transmission, it is possible to transmit data via Bluetooth® LE without an active connection in a broadcast message, called "Beacon". This application note describes what beacons are and how they can be used.

Application note ANR027 - Bluetooth qualification guide

<http://www.we-online.com/ANR027>

Every product containing Bluetooth® technology needs to be qualified at the Bluetooth® SIG (special interest group). This application note explains the steps to be done to gain a Bluetooth® qualification for the end product using a Würth Elektronik eiSos Bluetooth® LE radio module.

Application note ANR030 - nRF Connect

<http://www.we-online.com/ANR030>

This application note gives a short overview about the options to create a custom firmware for Würth Elektronik eiSos radio modules by using the hardware platform and the embedded nRF5x system on chip. It presents options on firmware development environments and accessories (like SDKs) for the use within the nRF5 ecosystem. The reader is informed on how to access to a multitude of radio standards (like Bluetooth® LE, Bluetooth® MESH, Bluetooth® LE Audio, Matter, Zigbee, Thread, Wirepas) for custom firmware developments whilst the hardware platform can stay the same.

Application note ANR031 - Certification of custom modules

<http://www.we-online.com/ANR031>

This application note explains how certifications of a standard product can be used to gain the certification of a customized product. This is done for firmware, that has been adapted by Würth Elektronik eiSos, as well as for firmware written by customer.

1. Introduction

This manual is valid for following Proteus-II variants:

- 2608011024010
- 2608011124010

1.1. Operational description

The Proteus-II exists in two variants, one variant with integrated PCB-antenna, and the other variant with 50 Ω connection to an external antenna. For the general functionality there is no difference between the variants.

The Proteus-II module is a radio sub module/device for wireless communication between devices such as control systems, remote controls, sensors etc. . On the basis of Bluetooth® LE 5 [1] it offers a fast and secure data transmission of data packages between two or more parties (point to point topology). A serial interface (UART) is available for communication with the host system.

The Proteus-II uses the Bluetooth® LE standard to provide general data transmission between several devices. The standard itself offers a wide range of configurations and possibilities to suit and optimize sophisticated customer applications. To fulfill the needs and specifications of such applications a tailored firmware can be developed on the basis of the Proteus-II hardware. This includes the connection and communication to custom sensors, custom Bluetooth® LE profiles, timing configurations, security configuration as well as power consumption optimizations.

1.1.1. Key features

The Proteus-II offers the following key features that are described in the manual in more detail:

SPP-like connection-based secured data transmission: The Proteus-II firmware implements an SPP-like Bluetooth® LE profile that allows the bidirectional data transmission between several Proteus-II and/or to other Bluetooth® LE devices implementing the AMBER SPP profile. Any module in the network can initiate connection setup. Secured connections allow the transmission of encrypted data (user-defined key or pairing).

Fast sensor data transmission via Beacons: The Proteus-II supports the transmission and reception of Beacons. Beacons are fast broadcast messages that allow the energy-efficient unidirectional transmission of data. Especially in sensor networks, this feature is suitable for the frequent transmission of measurement data as it removes the need for connection-based communication and therefore is more energy efficient.

Advanced customization capabilities: The configurable Device Information Service (DIS), the UUID and the appearance of the Bluetooth® LE profile, enable to personalize the Proteus-II to fuse with the user's end product.

Low power position sensing solutions: The current TX power of any Proteus-II is always transmitted with each advertising packet when the module is in command mode. With this, distance estimation and position sensing solutions can be realized conveniently by performing a passive scan.

Fast serial interface: The Proteus-II offers a UART-interface to communicate with a host using a user-defined baud rate and a simple command interface.

Latest microprocessor generation provided by Nordic Semiconductor nRF52 series: The heart of the Proteus-II is a Bluetooth® LE chip of the nRF52 series offering high performance values combined with low power consumption. It is a 32 Bit ARM Cortex-M4F CPU with 512 kB flash + 64 kB RAM and up to 4dBm output power.

Bluetooth® 5 stack: The Bluetooth® 5 stack enables fast and energy efficient data transmission using state-of-the-art technology of Nordic Semiconductors.

High throughput mode: The Proteus-II contains the so called "High throughput mode" that allows to send up to 4 data packets per connection interval. This increases significantly the throughput. This mode and its usage is described in application note ANR006 [2].

All Bluetooth® LE roles supported: The integrated Bluetooth® LE stack supports all Bluetooth® LE roles. Depending on the current state of operation the Proteus-II firmware automatically switches its role to execute the user's instructions.

Flexible wired interfacing: If custom hardware does not support UART communication or in case of a host less implementation, the Proteus-II is equipped with extra pins suited for custom device/sensor connection. With help of these, a tailored firmware can be developed which is optimized to the customer's needs. The pins can be configured to various functions such as UART, SPI, I2C, ADC, PWM, NFC and GPIO.

OTA firmware update: The Proteus-II firmware provides over the air firmware update capabilities. Firmware updates can be applied using the Nordic Apps for cell phones.

Peripheral only mode: The Proteus-II firmware provides the "peripheral only" operation mode (see chapter 10), that allows the easy adaption of already existing custom hardware with the Bluetooth® LE interface. By default, this mode offers the static passkey pairing method with bonding and a transparent UART interface. With this, custom hardware can be accessed by mobile Bluetooth® LE devices (like smart phones including a custom App) using an authenticated and encrypted Bluetooth® LE link without the need of configuring the module.

1.1.2. Connectivity

The Bluetooth® LE standard allows to setup a network with various Bluetooth® LE devices from different manufacturers. To be able to communicate with Proteus-II devices, the WE SPP-like profile must be known and implemented by all network participants. Thus arbitrary Bluetooth® LE devices (like iOS or Android devices) must implement this profile, too. To do so, the Proteus-II application note ANR005 [3] contains the design data of the WE SPP-like profile.

1.2. Block diagram

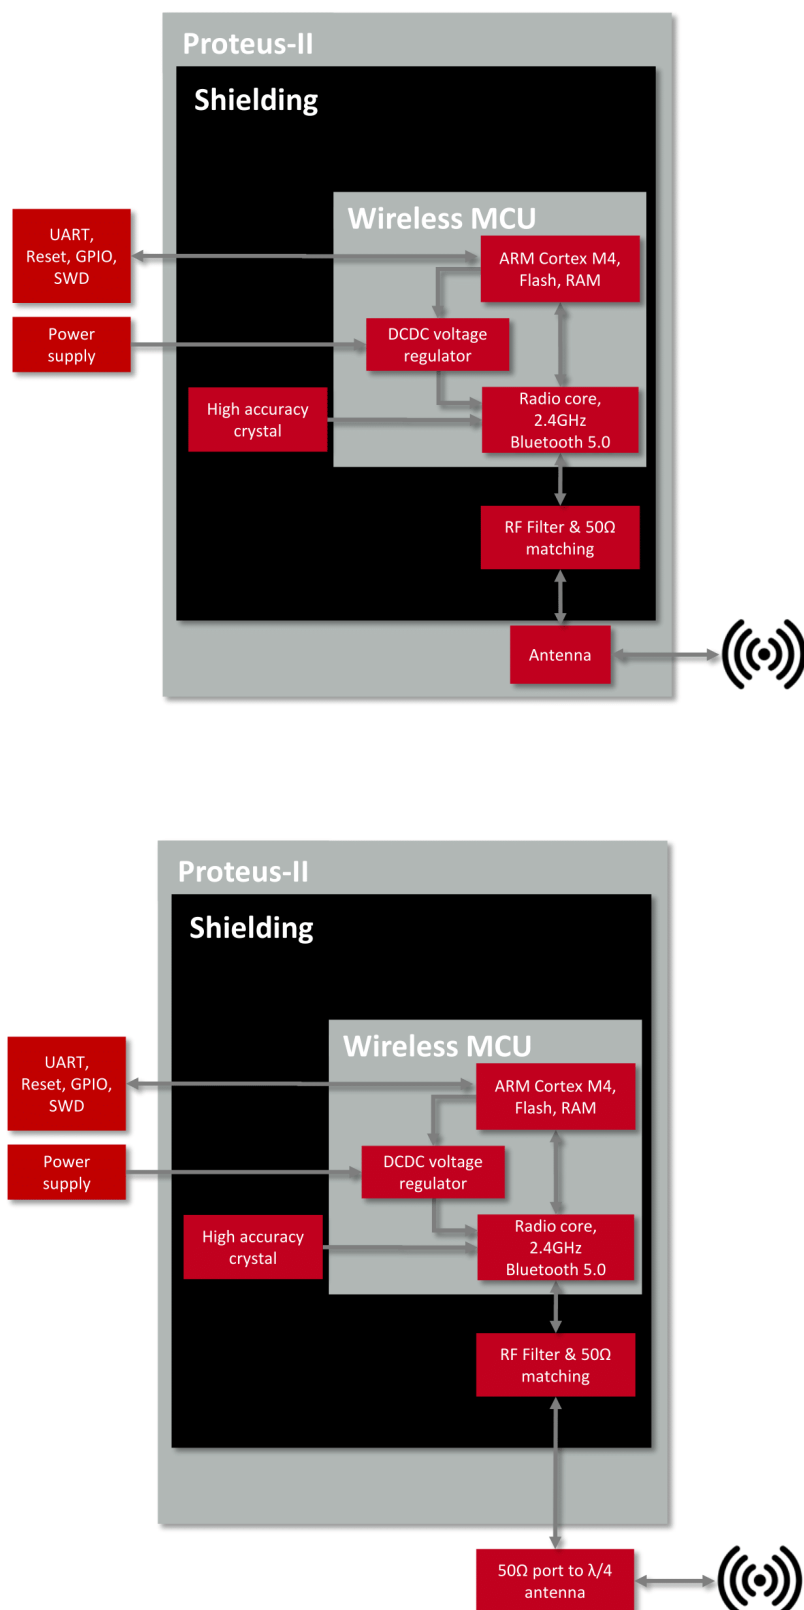


Figure 1: Block diagram of the module with internal PCB antenna and antenna pad

1.3. Ordering information

WE order code	Former order code	Description
2608011024010	AMB2623-TR	Bluetooth® Low Energy radio Module with integrated antenna, Tape & Reel
2608011124010	AMB2623-1-TR	Bluetooth® Low Energy radio Module with RF pad, Tape & Reel

Table 1: Ordering information

2. Electrical specifications

As not otherwise stated measured on the EV-Board Proteus-II-EV with $T = 25\text{ °C}$, $V_{DD} = 3\text{ V}$, $f = 2.44\text{GHz}$, internal DC-DC converter in use.

2.1. Recommended operating conditions

Description	Min.	Typ.	Max.	Unit
Ambient temperature	-40	25	85	°C
Supply voltage (V_{DD})	1.8	3	3.6	V
Supply rise time (0V to $\geq 1.7\text{V}$)			60	ms

Table 2: Recommended operating conditions



The on-chip power-on reset circuitry may not function properly for rise times longer than the specified maximum.



A step in supply voltage of 300 mV or more, with rise time of 300 ms or less, within the valid supply range, may result in a system reset.



An instable supply voltage may significantly decrease the radio performance and stability.

2.2. Absolute maximum ratings

Description	Min.	Typ.	Max.	Unit
Supply voltage (V_{DD})	-0.3		+3.9	V
Voltage on any digital pin, $V_{DD} \leq 3.6\text{ V}$	-0.3		$V_{DD} + 0.3$	V
Voltage on any digital pin, $V_{DD} \geq 3.6\text{ V}$	-0.3		3.9	V
Input RF level			10	dBm
Flash endurance	10 000			Write/erase cycles

Table 3: Absolute maximum ratings

2.3. Power consumption

2.3.1. Static

Continuous test mode	Min.	Typ.	Max.	Unit
TX current consumption at +4 dBm		7.5 ¹		mA
TX current consumption at 0 dBm		5.3 ¹		mA
RX current consumption		5.4 ¹		mA
Sleep (system off mode)		0.4		μA
TX current consumption at +4 dBm		11 ²		mA
TX current consumption at 0 dBm		8 ²		mA
RX current consumption		8 ²		mA

Table 4: Power consumption for 100% transmission/reception



Due to the Bluetooth® LE time slot operation, the real operating currents are reduced significantly and depend on the user selectable advertising and connection interval settings.

¹ Transmitter only with DC/DC converter from nRF52 data sheet.

² Full module power consumption.


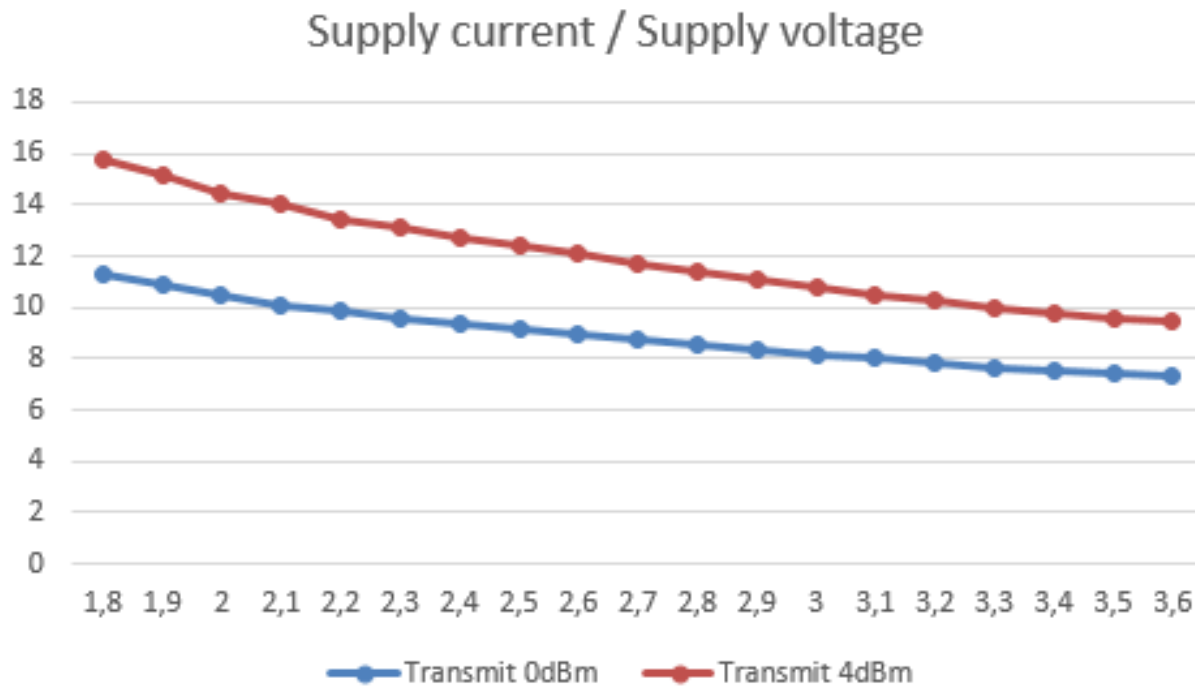


Figure 2: TX Current consumption vs. VCC

2.3.2. Dynamic

Besides the static TX, RX, idle and sleep current the average current is of interest. Here an example for a typical behavior of a peripheral device in advertising mode (see Figure 3 and Figure 4). Currents and state durations are dependent on the configuration of the module. In this state the module transmits the advertising packets on the 3 advertising channels.

Nordic Semiconductor provides an online tool calculating the average current of a Bluetooth® connection. It can be accessed at <https://devzone.nordicsemi.com/power/>.

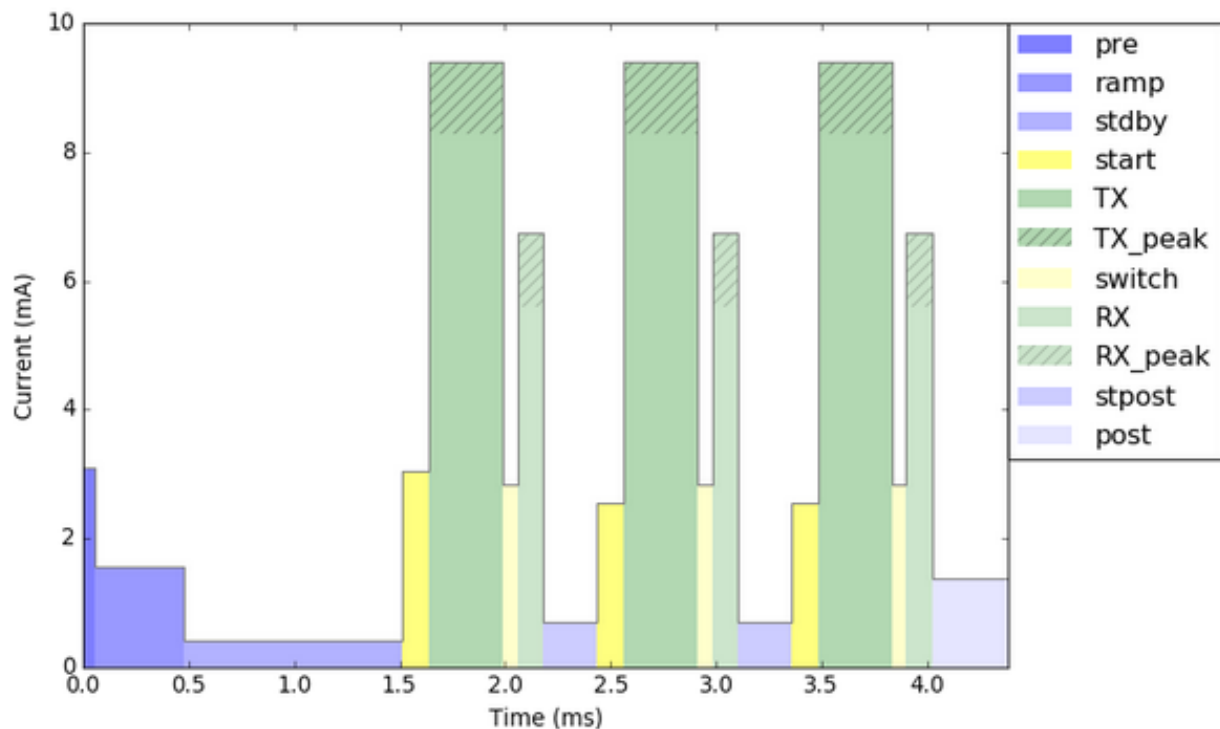

Stage	Description	Time (ms)	Length (us)	Avg. current (mA)	Peak current (mA)
pre	Pre-processing	0.0	56	3.1	
ramp	Standby + HFXO ramp	0.1	420	1.6	
stdby	Standby	0.5	1034	0.4	
start	Radio startup + CPU	1.5	128	3.1	
TX	Radio TX	1.6	353	8.3	9.4
switch	Radio switch	2.0	67	2.8	
RX	Radio RX	2.1	123	5.6	6.7
stpost	Standby + Post-processing	2.2	256	0.7	
start	Radio startup	2.4	123	2.6	
TX	Radio TX	2.6	353	8.3	9.4
switch	Radio switch	2.9	67	2.8	
RX	Radio RX	3.0	123	5.6	6.7
stpost	Standby + Post-processing	3.1	256	0.7	
start	Radio startup	3.4	123	2.6	
TX	Radio TX	3.5	353	8.3	9.4
switch	Radio switch	3.8	67	2.8	
RX	Radio RX	3.9	123	5.6	6.7
post	Post-processing	4.0	358	1.4	
	System On IDLE	4.4	40.6 ms	1.9 uA	
Total			45.0 ms	325 uA	

Figure 3: Current consumption calculation in advertising mode with 40 ms advertising interval, UART disabled

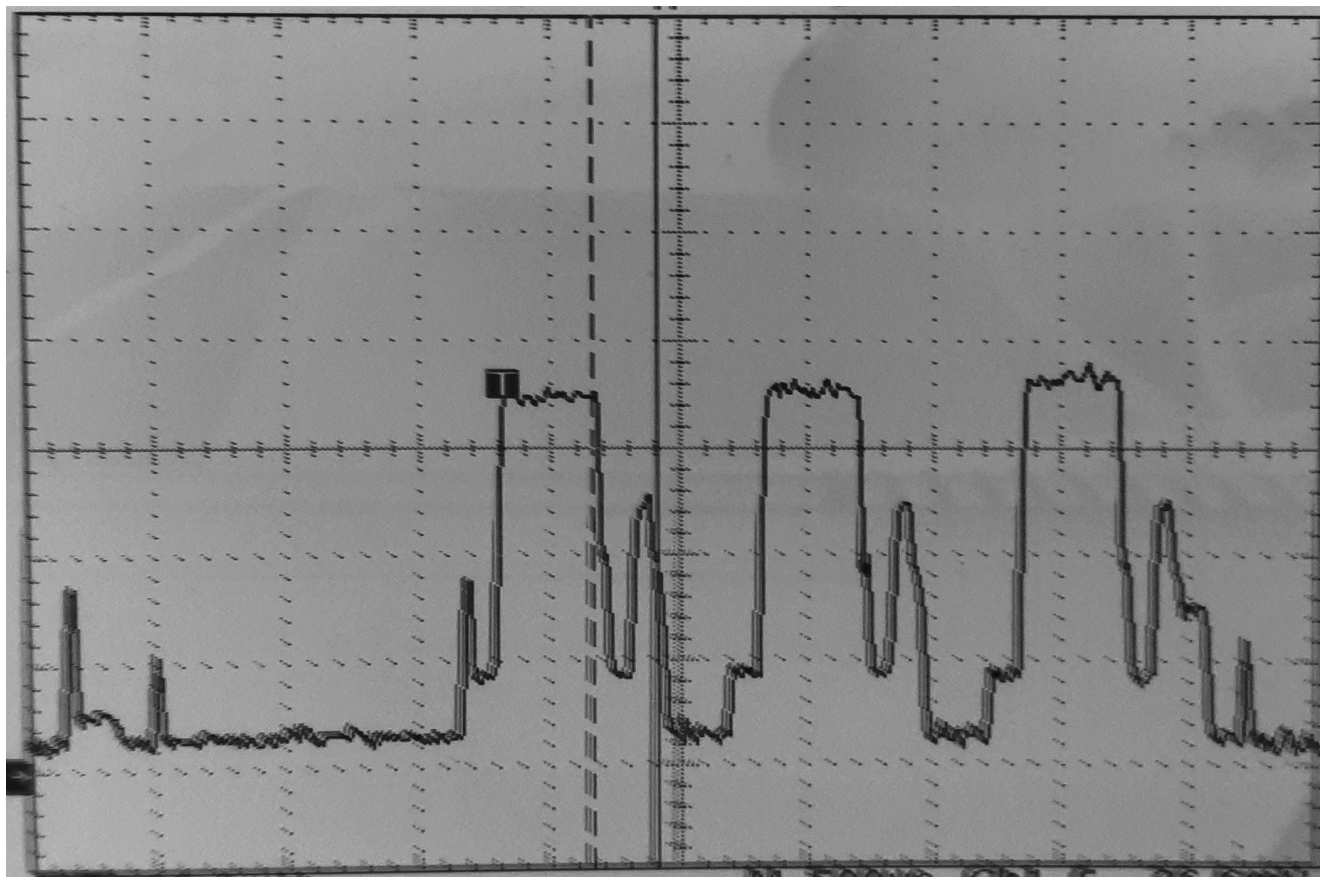


Figure 4: Measured Proteus-II transient current consumption in advertising mode with 40 ms advertising interval, excerpt of 5ms

2.4. Radio characteristics

50 Ω conducted measurements from nRF52 data sheet

Description	Min.	Typ.	Max.	Unit
Output power	-40	+3	+4	dBm
Input sensitivity (≤ 37 Bytes, BER=1E-3)		-92 ¹		dBm
RSSI accuracy valid range (± 2 dB)	-90		-20	dBm
Enable TX or RX delay		140		μ s
Enable TX or RX delay (fast mode)		40		μ s
Disable TX delay		6		μ s
Disable RX delay		0		μ s

Table 5: Radio parameters

Output power RF_TXPower = 4	Min.	Typ.	Max.	Unit
Proteus-II external antenna (50 Ω conducted)		3	4	dBm
Proteus-II integrated pcb antenna (e.i.r.p.)		-2	0	dBm

Table 6: Output power

¹nRF52832 Rev.1, with build code CIAA-B00, CSP package, in DC/DC Mode

2.5. Pin characteristics

Measurements from nRF52 data sheet

Description	Min.	Typ.	Max.	Unit
Input high voltage	$0.7 \times VCC$		VCC	V
Input low voltage	VSS		$0.3 \times VCC$	V
Current at VSS+0.4 V, output set low, standard drive, $VDD \geq 1.7V$	1	2	4	mA
Current at VSS+0.4 V, output set low, high drive, $VDD \geq 2.7 V$	6	10	15	mA
Current at VSS+0.4 V, output set low, high drive, $VDD \geq 1.7 V$	3			mA
Current at VDD-0.4 V, output set high, standard drive, $VCC \geq 1.7V$	1	2	4	mA
Current at VDD-0.4 V, output set high, high drive, $VDD \geq 2.7 V$	6	9	14	mA
Current at VDD-0.4 V, output set high, high drive, $VDD \geq 1.7 V$	3			mA
Internal pull-up resistance		13		k Ω
Internal pull-down resistance		13		k Ω

Table 7: Pin characteristics

3. Pinout

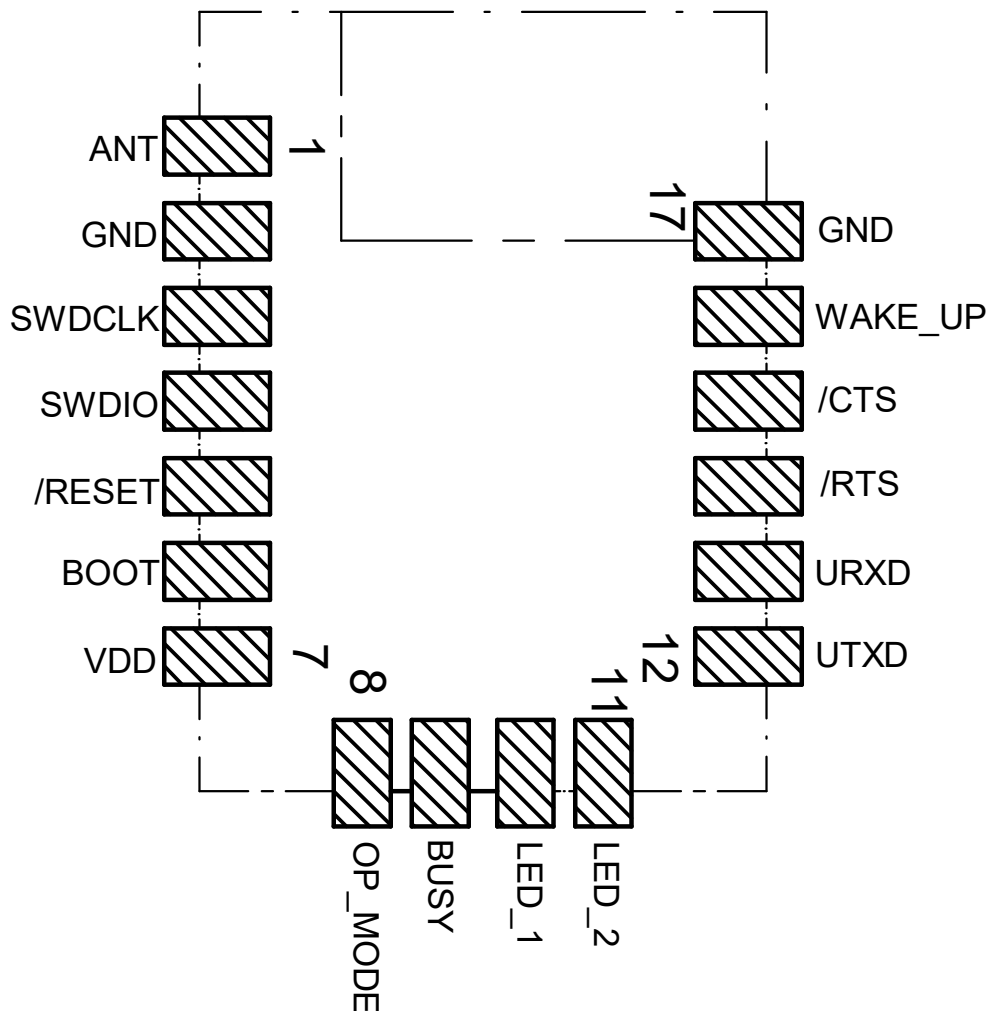


Figure 5: Pinout (top view)

No	μC Pin	Designation	I/O	Description
1		<i>ANT</i>	RF	Antenna connection in case of module variant with external antenna. In case of module with integrated antenna, do not connect.
2		<i>GND</i>	Supply	Ground
3		<i>SWDCLK</i>	Input	Serial wire clock. Uses internal pull down resistor. Do not connect if not needed.

4		<i>SWDIO</i>	Input	Serial wire input/output. Uses internal pull up resistor. Do not connect if not needed.
5	P0.21	<i>/RESET</i>	Input	Reset pin. A low signal resets the module. Uses internal pull up resistor.
6	P0.05/AIN3	<i>BOOT</i>	Input	Boot pin with internal pull up resistor ¹ during start-up. A low signal during and short after reset starts the module in OTA bootloader mode. Do not connect if not needed.
7		<i>VDD</i>	Supply	Supply voltage
8	P0.10/NFC2 ²	<i>OP_MODE</i>	Input	Operation mode pin with internal pull down resistor ¹ during start-up. Low level or open: Normal Mode. High level: Peripheral only Mode. Do not connect if not needed.
9	P0.09/NFC1 ²	<i>BUSY</i>	Output	Indicates if module is busy with data transmission. See section 10.3.2 to check how to use this pin in Peripheral only Mode. In Command mode this pin must not be respected. Do not connect, if not needed.
10	P0.00/XL1 ²	<i>LED_1</i>	Output	Indicates the module state (active high). Do not connect if not needed.
11	P0.01/XL2 ²	<i>LED_2</i>	Output	Indicates the module state (active high). Do not connect if not needed.
12	P0.02/AIN0	<i>UTXD</i>	Output	UART (Transmission), if UART is enabled ³ .
13	P0.03/AIN1	<i>URXD</i>	Input	UART (Reception) with internal pull up resistor ¹ , if UART is enabled ³ .
14	P0.04/AIN2	<i>/RTS</i>	Output	/RTS signal if UART ³ and flow control is enabled. Input floating otherwise. Do not connect if not needed.
15	P0.28/AIN4	<i>/CTS</i>	Input	/CTS signal if UART ³ and flow control is enabled. Input floating otherwise. Do not connect if not needed.
16	P0.29/AIN5	<i>WAKE_UP</i>	Input	Wake-up will allow leaving the system-off mode or re-enabling the UART. Uses internal pull up resistor ⁴ . Do not connect if not needed.
17		<i>GND</i>	Supply	Ground

Table 8: Pinout

¹Internal pull ups or pull downs are configured at start-up by the firmware installed in the SoC.²Pins for NFC and external crystal are only available in custom firmware.³If UART is disabled, this pin is input floating. UART can be disabled using the `CMD_UARTDISABLE_REQ` command in command mode, or closing the Bluetooth® LE connection in peripheral only mode.⁴Internal pull ups or pull downs are configured at start-up by the firmware installed in the SoC.

4. Quick start

4.1. Minimal pin configuration

In factory state the modules are immediately ready for operation; the following pins are required in the minimal configuration:

VDD, GND, UTXD, URXD, /RESET

If the flow control is enabled additionally the pins */RTS* and */CTS* shall be connected.

We recommend to additionally have the pins *SWDIO* and *SWDCLK* accessible in order to support a fail-safe firmware update. A standard socket on the customer's PCB for connecting a flash adapter can be useful for debugging purposes (e.g. a JTAG 2*10 pin header with 2.54mm pin-to-pin distance).



Implementing the fail-safe firmware update method using the SWD interface is recommended. Without having the SWD interface available a fail-safe firmware update on a customer PCB cannot be guaranteed.

If the module has to be connected to a PC, a converter (TTL to RS-232 or TTL to USB) has to be used. See chapter 3 for details on all pins. Please refer to the Proteus-II-EV schemes for a reference design.



The logic level of the module is based on 3V. A 5 V logic level must not be connected directly to the module.

4.2. Power up

After powering the module the */RESET* pin shall be hold for another Δt of 1 ms after the *VDD* is stable to ensure a safe start-up. The module will send a *CMD_GETSTATE_CNF* to indicate "ready for operation" after the */RESET* pin was released.



Applying a reset (e.g. a host temporarily pulling the */RESET* pin down for at least 1 ms and releasing it again) after the *VCC* is stable will also be sufficient.

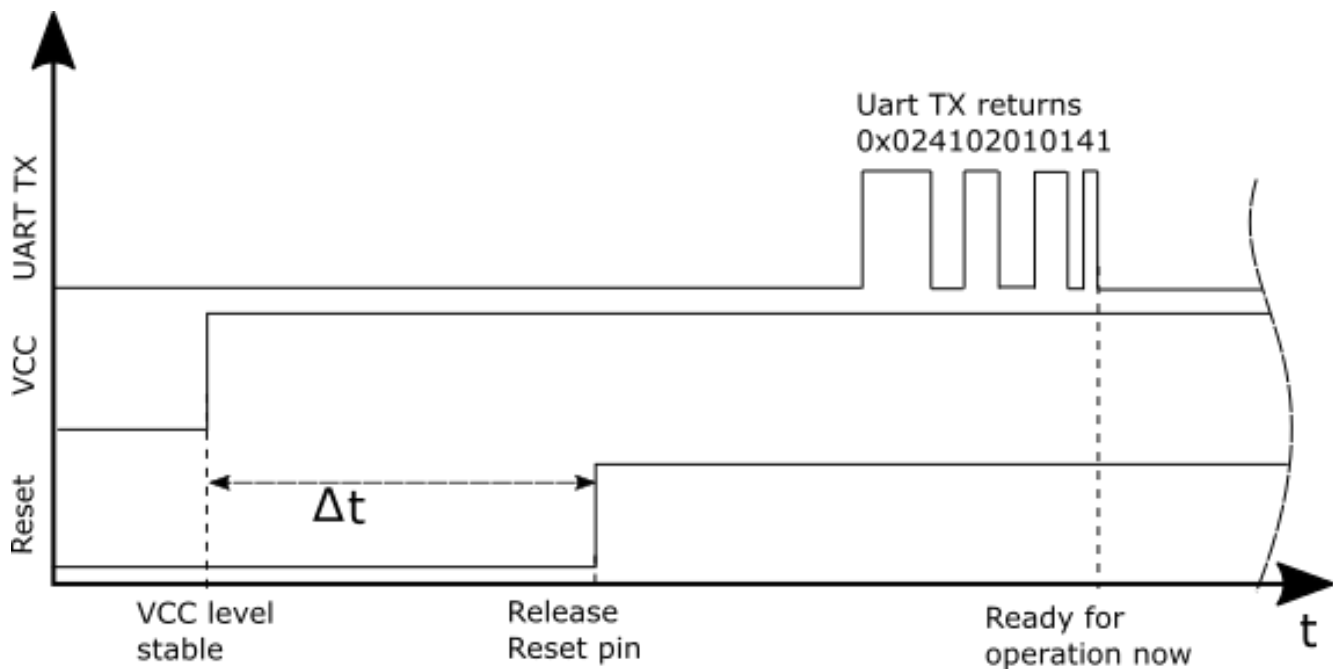


Figure 6: Power up

4.3. Quickstart example

This section describes how to quick start the data transmission between two Proteus-II modules. The goal is to setup a connection between module A and module B, transmit some data and close the connection again.

In this section, all packet data from or to the modules is given in **hexadecimal notation**. For quick testing, a pair of Proteus-II-EV is recommended.

Connect the two devices (modules, EV-boards or USB dongles) to a PC. A terminal program, for example *hterm*, is used to perform the communication via COM ports. The two corresponding COM ports have to be selected and opened with a default configuration of 115200 Baud, 8 data Bits, 1 stop Bit and parity set to none (8n1).



To reproduce the following sequence, note that, the FS_BTMAC of every module is different, thus it has to be replaced it in the commands below. In addition, the checksum has to be adjusted, when adapting any command. The command structure and checksum calculation is described in chapter 8.



Note that the module goes to ACTION_SLEEP mode if no connection is setup after RF_AdvertisingTimeout seconds. The module will indicate this using a CMD_SLEEP_CNF. In addition, the UART is disabled in ACTION_SLEEP mode. The default value is 0s, which means that it will run forever.

Connection setup and first data transmission

1. Power-up the modules and make their UARTs accessible by the host(s) (115200 Baud, 8n1). After the power-up or after reset the following sequence is sent from the module.

Info	Module A	Module B
⇐ Response CMD_GETSTATE_CNF: Module A started in ACTION_IDLE mode.	02 41 02 00 01 01 41	
⇐ Response CMD_GETSTATE_CNF: Module B started in ACTION_IDLE mode.		02 41 02 00 01 01 41

2. Request the FS_BTMAC of both modules.

Info	Module A	Module B
⇒ Request CMD_GET_REQ with settings index 4	02 10 01 00 04 17	
⇐ Response CMD_GET_CNF: FS_BTMAC of module A is 0x55 0x00 0x00 0xDA 0x18 0x00	02 50 07 00 00 55 00 00 DA 18 00 C2	
⇒ Request CMD_GET_REQ with settings index 4		02 10 01 00 04 17
⇐ Response CMD_GET_CNF: FS_BTMAC of module B is 0x11 0x00 0x00 0xDA 0x18 0x00		02 50 07 00 00 11 00 00 DA 18 00 86

3. Connect module A to module B via Bluetooth®.



This example is taken from an older firmware. Using newer firmwares with the optional Bluetooth® 4.2 feature "LE Packet Length Extension", the maximum supported payload per packet may be higher than 0x13.

Info	Module A	Module B
⇒ Request CMD_CONNECT_REQ with FS_BTMAC of module B	02 06 06 00 11 00 00 DA 18 00 D1	
⇐ Response CMD_CONNECT_CNF: Request understood, try to connect now	02 46 01 00 00 45	
⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 86 07 00 00 11 00 00 DA 18 00 50	

⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 86 07 00 00 55 00 00 DA 18 00 14
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0x13 (19 Bytes) per packet	02 C6 08 00 00 11 00 00 DA 18 00 13 C3	
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0x13 (19 Bytes) per packet		02 C6 08 00 00 55 00 00 DA 18 00 13 87

4. Once the connection is active, data can be sent in each direction. Let us send a string "ABCD" from module B to module A.



The RSSI values will be different in your tests.

Info	Module A	Module B
⇒ Request CMD_DATA_REQ: Send "ABCD" to module A		02 04 04 00 41 42 43 44 06
⇐ Response CMD_DATA_CNF: Request received, send data now		02 44 01 00 00 47
⇐ Indication CMD_DATA_IND: Received string "ABCD" from FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 with RSSI of 0xCA (-54dBm)	02 84 0B 00 11 00 00 DA 18 00 CA 41 42 43 44 90	
⇐ Response CMD_TXCOMPLETE_RSP: Data transmitted successfully		02 C4 01 00 00 C7

5. Reply with "EFGH" to module B.

Info	Module A	Module B
⇒ Request CMD_DATA_REQ: Send "EFGH" to module B	02 04 04 00 45 46 47 48 0E	
⇐ Response CMD_DATA_CNF: Request received, send data now	02 44 01 00 00 47	

⇐ Indication CMD_DATA_IND: Received string "EFGH" from FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 with RSSI of 0xC1 (-63dBm)		02 84 0B 00 55 00 00 DA 18 00 C1 45 46 47 48 D7
⇐ Response CMD_TXCOMPLETE_RSP: Data transmitted successfully	02 C4 01 00 00 C7	

6. Now module A closes the connection, so both modules will get a disconnect indication.

Info	Module A	Module B
⇒ Request CMD_DISCONNECT_REQ: Disconnect	02 07 00 00 05	
⇐ Response CMD_DISCONNECT_CNF: Request received, disconnect now	02 47 01 00 00 44	
⇐ Indication CMD_DISCONNECT_IND: Connection closed	02 87 01 00 16 92	
⇐ Indication CMD_DISCONNECT_IND: Connection closed		02 87 01 00 13 97

5. Functional description

5.1. Operation modes

The Proteus-II module acts as a slave and can be fully controlled by an external host. The Proteus-II supports the following operating modes:

- The **command mode**, where the Proteus-II can be controlled by the host controller via commands. The command mode allows to use all central and peripheral function of the radio module. The functions of the radio module, like data transmission or configuration tasks, can be triggered by predefined commands (see chapter 7) that are sent as telegrams over the UART interface.
- The **peripheral only mode** (see chapter 10) provides a transparent UART interface and supports only the peripheral functions of the radio module. Data transmission can be done by the host without using any commands.

5.2. Radio module states

The Proteus-II can operate in different states. Depending on the active state several commands of the command interface (see chapter 7) are permitted to modify the state, configure the module or transmit data over the radio interface. An overview of the different states and the corresponding allowed commands can be found in Figure 7.

When the Proteus-II is powered up, it starts in `ACTION_IDLE` state. In this state the module advertises (Bluetooth® LE role "peripheral"), such that other devices in range (Bluetooth® LE role "central" or "observer") can detect it and connect to it. If no connection was setup after `RF_AdvertisingTimeout` seconds, the module goes to `ACTION_SLEEP` state which will stop advertising.

The `ACTION_IDLE` state also allows to switch to `ACTION_SCANNING` state, where the module stops advertising and scans for other advertising modules in range (Bluetooth® LE role "central").

When leaving the `ACTION_SCANNING` state with the corresponding command, the module is in `ACTION_IDLE` state and starts advertising again.

The `ACTION_CONNECTED` state can be entered either by getting a connection request from another module (Bluetooth® LE role "peripheral") or by setting up a connection itself (Bluetooth® LE role "central"). In this case it stops advertising and data can be transmitted and received to/from the connected module. This state remains active as long as the module does not disconnect itself (e.g. due to a timeout), no disconnection request from the connected device is received. When disconnecting, the module goes to `ACTION_IDLE` state and starts advertising again.

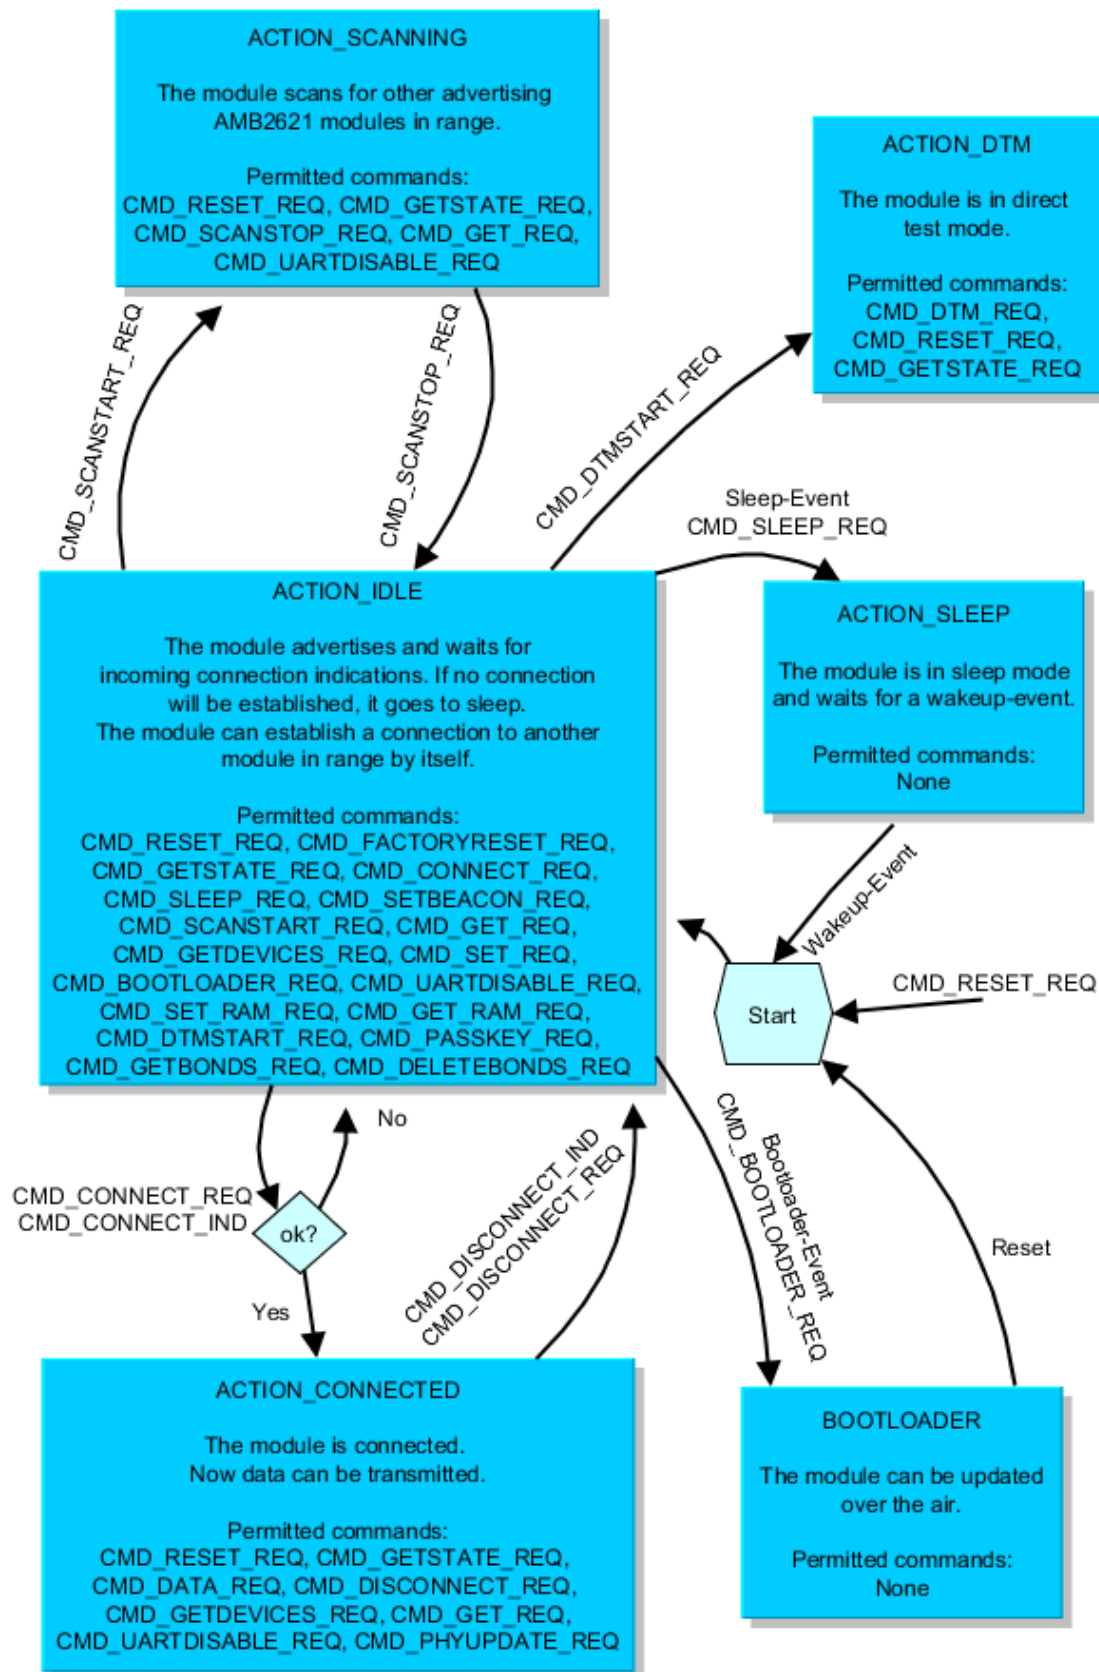


Figure 7: State overview

5.3. State indication using the LED pins

The pins *LED_1* and *LED_2* of the Proteus-II can be used to determine the module state. The states described in Figure 7 result in the following pin behavior. The pins on the Proteus-II are active high.

State	<i>LED_1</i>	<i>LED_2</i>
ACTION_IDLE	Blinking (On for 200 ms, Off for 2800 ms)	Off
ACTION_SCANNING	Blinking (On for 1000 ms, Off for 1000 ms)	Off
ACTION_CONNECTED	On	Off, On (as soon as the channel was opened successfully, see CMD_CHANNELOPEN_RSP)
ACTION_SLEEP	Off	Off
ACTION_DTM	Off	Off
BOOTLOADER waiting for connection	On	Off
BOOTLOADER connected, firmware update running	Off	On

Table 15: LED behavior of the Proteus-II

5.4. Sleep mode

Especially for battery-powered devices the ACTION_SLEEP mode (system-off mode) supports very low power consumption ($<1\mu\text{A}$). It can be entered by sending the command CMD_SLEEP_REQ to the module. If allowed (due to the current operating state) the module will then send a CMD_SLEEP_CNF and then enter the ACTION_SLEEP mode.

In ACTION_SLEEP mode the UART is disabled, so the module will not receive or transmit any data. To prevent leakage current, the host shall not pull the *UART_RX* to LOW level (as the module has an internal pull-up resistor enabled on this pin).

To leave the ACTION_SLEEP mode and enter ACTION_IDLE state again, the module has to be woken up by applying a low signal to the *WAKE_UP* pin for at least 5ms before releasing the signal back to high. The module then restarts completely, so that all volatile settings are set to default. A CMD_GETSTATE_CNF will be sent when the module is ready for operation.



Please note that the *WAKE_UP* pin has a second function. If the module is not in ACTION_SLEEP mode and the UART was disabled using the CMD_UARTDISABLE_REQ, the UART can be re-enabled by applying falling edge, holding the line low for at least 10 ms before applying a rising edge and holding it high for at least 10 ms. In this case the module answers with a CMD_UARTENABLE_IND message.

5.5. Identification of a Proteus-II device on the radio

The Proteus-II can be identified on the radio interface by its FS_BTMAC. This FS_BTMAC is a Bluetooth®-conform MAC address, which is part of the data package sent during advertising in ACTION_IDLE mode. A FS_BTMAC has the size of 6 Bytes.

In ACTION_SCANNING state a module listens to the data packets of all advertising modules in range and stores their FS_BTMAC to an internal data base. With help of a FS_BTMAC a connection to the corresponding device can then be established using the CMD_CONNECT_REQ command.

To simplify the identification of Proteus-II devices on the RF-interface a short user-defined name (see RF_DeviceName) can be given to the module, which is also part of the advertising packet.



The FS_BTMAC consists of the Würth Elektronik eiSos MAC ID 0x0018DA followed by the FS_SerialNumber of the module.

5.6. Connection based data transmission, with or without security

In the Bluetooth® LE standard the transmission of data typically is connection based. A connection between two devices can be secured (with or without key exchange) or unsecured (default setting). In any case, each data packet transmitted is acknowledged on the link layer, such that it is resent as long as a packet is lost. The following lines describe how to run the connection setup and data transmission using the Proteus-II.

If module A is supposed to setup a connection with module B, module A can use the command CMD_CONNECT_REQ including the FS_BTMAC of module B. If the FS_BTMAC of module B is unknown, a scan can be run before by module A to discover all available modules in range.

After sending the command CMD_CONNECT_REQ, the module answers with a CMD_CONNECT_CNF to signal that the request has been understood and the module now tries to establish the connection.

If module B cannot be found on the air within a timeout, module A outputs a CMD_CONNECT_IND with "failed" as status. Otherwise, as soon as the physical connection has been set up successfully, module A and B print a CMD_CONNECT_IND with the status of the successful connection and LED_1 turns on.

Next some security and authentication messages will follow, like CMD_SECURITY_IND, if security is enabled.

After the physical connection has been setup successfully the modules exchange their services. As soon as this has finished successfully, a CMD_CHANNELOPEN_RSP is given out to the UART indicating that the connection is ready for data transmission. Furthermore, LED_2 turns on.

Now data can be transmitted in both directions using the command CMD_DATA_REQ. It is confirmed by a CMD_DATA_CNF (data will be processed) and a CMD_TXCOMPLETE_RSP (data transmitted successfully).

Each time data has been received a CMD_DATA_IND will be output containing the transmitted data.

As soon as one module closes the connection using a CMD_DISCONNECT_REQ, both modules will inform their host by a CMD_DISCONNECT_IND message that the connection is no longer open.

If one module is no longer within range, the CMD_DISCONNECT_IND message is triggered by a timeout.

For an example on setting up an unsecured connection, see chapter 4.3. See also the Proteus-II application note ANR002 to get detailed information about the connection setup with foreign devices.

For an example on setting up an unsecured connection, see chapter 4.3. See also the application note ANR005 [3] to get detailed information about the connection setup with foreign devices.

5.6.1. Further information for a secure connection setup

The RF_SecFlags parameter of the module determines the security mode. If a certain security mode of a Proteus-II peripheral device is set, its security level has to be met by the connecting central device to be able to exchange data. As soon as the defined security level is not met by the central device, no access to the peripheral's profiles will be granted.



When connecting from a Proteus-II to a Proteus-II, you shall not use different security modes.



To get further information about the secured connection setup, when using a foreign device (i.e. mobile phone with a custom APP), please refer to the Application Note "advanced user guide" (Proteus-I: ANR002, Proteus-II: ANR005).

5.6.1.1. Just works mode

In case of the "Just works" mode, each time a connection is established, a new random key is exchanged in advance to be used for data encryption. Since no authentication will be performed, also devices without input and output capabilities (like keyboard or display) are able to connect to each other.

Example: Secured connection with LE Legacy security method "Just Works" without bonding

1. Power-up the modules and make their UARTs accessible by the host(s) (115200 Baud, 8n1). After the power-up or after reset the following sequence is sent from the module

Info	Module A	Module B
⇐ Response CMD_GETSTATE_CNF: Module A started in ACTION_IDLE mode.	02 41 02 00 01 01 41	
⇐ Response CMD_GETSTATE_CNF: Module B started in ACTION_IDLE mode.		02 41 02 00 01 01 41

2. Request the FS_BTMAC of both modules.

Info	Module A	Module B
⇒ Request CMD_GET_REQ with settings index 4	02 10 01 00 04 17	
⇐ Response CMD_GET_CNF: FS_BTMAC of module A is 0x55 0x00 0x00 0xDA 0x18 0x00	02 50 07 00 00 55 00 00 DA 18 00 C2	
⇒ Request CMD_GET_REQ with settings index 4		02 10 01 00 04 17
⇐ Response CMD_GET_CNF: FS_BTMAC of module B is 0x11 0x00 0x00 0xDA 0x18 0x00		02 50 07 00 00 11 00 00 DA 18 00 86

3. Configure the parameter RF_SecFlags to use "Just Works" pairing method for Bluetooth® security.

Info	Module A	Module B
⇒ Perform CMD_SET_REQ with settings index 12 and value 0x02 on module A	02 11 02 00 0C 02 1F	
⇐ Response CMD_SET_CNF (Module will restart to adopt the new value)	02 51 01 00 00 52	
⇐ Response CMD_GETSTATE_CNF	02 41 02 00 01 01 41	
⇒ Perform CMD_SET_REQ with settings index 12 and value 0x02 on module B		02 11 02 00 0C 02 1F
⇐ Response CMD_SET_CNF (Module will restart to adopt the new value)		02 51 01 00 00 52
⇐ Response CMD_GETSTATE_CNF		02 41 02 00 01 01 41

4. Connect module A to module B via Bluetooth®.

Info	Module A	Module B
⇒ Request CMD_CONNECT_REQ with FS_BTMAC of module B	02 06 06 00 11 00 00 DA 18 00 D1	
⇐ Response CMD_CONNECT_CNF: Request understood, try to connect now	02 46 01 00 00 45	
⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 86 07 00 00 11 00 00 DA 18 00 50	
⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 86 07 00 00 55 00 00 DA 18 00 14

⇐ Indication CMD_SECURITY_IND, status 0x02 (encrypted link, pairing, no bonding), with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 88 07 00 02 11 00 00 DA 18 00 5C	
⇐ Indication CMD_SECURITY_IND, status 0x02 (encrypted link, pairing, no bonding), with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 88 07 00 02 55 00 00 DA 18 00 18

Info	Module A	Module B
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet	02 C6 08 00 00 11 00 00 DA 18 00 F3 EC	
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet		02 C6 08 00 00 55 00 00 DA 18 00 F3 A8

5. Once the connection is active, data can be sent in each direction. Let us send a string "ABCD" from module B to module A.



The RSSI values will be different in your tests.

Info	Module A	Module B
⇒ Request CMD_DATA_REQ: Send " ABCD " to module A		02 04 04 00 41 42 43 44 06
⇐ Response CMD_DATA_CNF: Request received, send data now		02 44 01 00 00 47
⇐ Indication CMD_DATA_IND: Received string " ABCD " from FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 with RSSI of 0xCA (-54dBm)	02 84 0B 00 11 00 00 DA 18 00 CA 41 42 43 44 90	
⇐ Response CMD_TXCOMPLETE_RSP: Data transmitted successfully		02 C4 01 00 00 C7

6. Reply with "EFGH" to module B.

Info	Module A	Module B
⇒ Request CMD_DATA_REQ: Send "EFGH" to module B	02 04 04 00 45 46 47 48 0E	
⇐ Response CMD_DATA_CNF: Request received, send data now	02 44 01 00 00 47	
⇐ Indication CMD_DATA_IND: Received string "EFGH" from FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 with RSSI of 0xC1 (-63dBm)		02 84 0B 00 55 00 00 DA 18 00 C1 45 46 47 48 D7
⇐ Response CMD_TXCOMPLETE_RSP: Data transmitted successfully	02 C4 01 00 00 C7	

7. Now module A closes the connection, so both modules will get a disconnect indication.

Info	Module A	Module B
⇒ Request CMD_DISCONNECT_REQ: Disconnect	02 07 00 00 05	
⇐ Response CMD_DISCONNECT_CNF: Request received, disconnect now	02 47 01 00 00 44	
⇐ Indication CMD_DISCONNECT_IND: Connection closed	02 87 01 00 16 92	
⇐ Indication CMD_DISCONNECT_IND: Connection closed		02 87 01 00 13 97

8. You may want to perform a CMD_FACTORYRESET_REQ to restore default settings.

5.6.1.2. StaticPaskey mode

In case of the "StaticPaskey" mode, a pass key has to be entered at the central side that has to match the pass key of the peripheral. Here the Proteus-II uses a static pass key in the peripheral role that is stored in the parameter RF_StaticPaskey. When using this method, the central device requests its host to enter the correct pass key (see CMD_PASKEY_IND). In this case the pass key of the peripheral has to be entered on central side using the CMD_PASKEY_REQ command. If the entered pass key is correct, the channel will be opened for data transmission. Otherwise, the connection will be rejected.

Example: Secured connection with security method "StaticPaskey"

1. Power-up the modules and make their UARTs accessible by the host(s) (115200 Baud, 8n1). After the power-up or after reset the following sequence is sent from the module

Info	Module A	Module B
⇒ Response CMD_GETSTATE_CNF: Module A started in ACTION_IDLE mode.	02 41 02 00 01 01 41	
⇒ Response CMD_GETSTATE_CNF: Module B started in ACTION_IDLE mode.		02 41 02 00 01 01 41

2. Request the FS_BTMAC of both modules.

Info	Module A	Module B
⇒ Request CMD_GET_REQ with settings index 4	02 10 01 00 04 17	
⇒ Response CMD_GET_CNF: FS_BTMAC of module A is 0x55 0x00 0x00 0xDA 0x18 0x00	02 50 07 00 00 55 00 00 DA 18 00 C2	
⇒ Request CMD_GET_REQ with settings index 4		02 10 01 00 04 17
⇒ Response CMD_GET_CNF: FS_BTMAC of module B is 0x11 0x00 0x00 0xDA 0x18 0x00		02 50 07 00 00 11 00 00 DA 18 00 86

3. Configure the parameter RF_SecFlags to use "StaticPaskey" pairing method for Bluetooth® security.

Info	Module A	Module B
⇒ Perform CMD_SET_REQ with settings index 12 and value 0x03 on module A	02 11 02 00 0C 03 1E	
⇒ Response CMD_SET_CNF (Module will restart to adopt the new value)	02 51 01 00 00 52	
⇒ Response CMD_GETSTATE_CNF	02 41 02 00 01 01 41	
⇒ Perform CMD_SET_REQ with settings index 12 and value 0x03 on module B		02 11 02 00 0C 03 1E
⇒ Response CMD_SET_CNF (Module will restart to adopt the new value)		02 51 01 00 00 52
⇒ Response CMD_GETSTATE_CNF		02 41 02 00 01 01 41

4. Connect module A to module B via Bluetooth®.

Info	Module A	Module B
⇒ Request CMD_CONNECT_REQ with FS_BTMAC of module B	02 06 06 00 11 00 00 DA 18 00 D1	
⇒ Response CMD_CONNECT_CNF: Request understood, try to connect now	02 46 01 00 00 45	

⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 86 07 00 00 11 00 00 DA 18 00 50	
⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 86 07 00 00 55 00 00 DA 18 00 14
⇐ Indication CMD_PASSKEY_IND to ask for the pass key	02 8D 07 00 00 11 00 00 DA 18 00 5B	
⇒ Answer with the CMD_PASSKEY_REQ and the pass key "123123"	02 0D 06 00 31 32 33 31 32 33 09	
⇐ Response CMD_PASSKEY_CNF: Pass key ok	02 4D 01 00 00 4E	
⇐ Indication CMD_SECURITY_IND, status 0x02 (encrypted link, pairing, no bonding), with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 88 07 00 02 11 00 00 DA 18 00 5C	
⇐ Indication CMD_SECURITY_IND, status 0x02 (encrypted link, pairing, no bonding), with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 88 07 00 02 55 00 00 DA 18 00 18
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet	02 C6 08 00 00 11 00 00 DA 18 00 F3 EC	
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet		02 C6 08 00 00 55 00 00 DA 18 00 F3 A8

5. Once the connection is active, data can be sent in each direction. Let us send a string "ABCD" from module B to module A.



The RSSI values will be different in your tests.

Info	Module A	Module B
⇒ Request CMD_DATA_REQ: Send "ABCD" to module A		02 04 04 00 41 42 43 44 06

⇐ Response CMD_DATA_CNF: Request received, send data now		02 44 01 00 00 47
⇐ Indication CMD_DATA_IND: Received string "ABCD" from FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 with RSSI of 0xCA (-54dBm)	02 84 0B 00 11 00 00 DA 18 00 CA 41 42 43 44 90	
⇐ Response CMD_TXCOMPLETE_RSP: Data transmitted successfully		02 C4 01 00 00 C7

6. Reply with "EFGH" to module B.

Info	Module A	Module B
⇒ Request CMD_DATA_REQ: Send "EFGH" to module B	02 04 04 00 45 46 47 48 0E	
⇐ Response CMD_DATA_CNF: Request received, send data now	02 44 01 00 00 47	
⇐ Indication CMD_DATA_IND: Received string "EFGH" from FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 with RSSI of 0xC1 (-63dBm)		02 84 0B 00 55 00 00 DA 18 00 C1 45 46 47 48 D7
⇐ Response CMD_TXCOMPLETE_RSP: Data transmitted successfully	02 C4 01 00 00 C7	

7. Now module A closes the connection, so both modules will get a disconnect indication.

Info	Module A	Module B
⇒ Request CMD_DISCONNECT_REQ: Disconnect	02 07 00 00 05	
⇐ Response CMD_DISCONNECT_CNF: Request received, disconnect now	02 47 01 00 00 44	
⇐ Indication CMD_DISCONNECT_IND: Connection closed	02 87 01 00 16 92	
⇐ Indication CMD_DISCONNECT_IND: Connection closed		02 87 01 00 13 97

8. You may want to perform a CMD_FACTORYRESET_REQ to restore default settings.

5.6.1.3. Bonding

The SECFLAGS_BONDING_ENABLE flag in the RF_SecFlags user setting allows enabling the bonding feature. This feature stores the keys that are exchanged during the pairing phase in a connection setup. With this, subsequent connections to bonded devices can be established without renegotiation. Bonding data of up to 32 devices will be stored in the flash.

The commands CMD_GETBONDS_REQ and CMD_DELETEBONDS_REQ allow to display and remove certain or all entries of the list of bonded devices.

Example: Secured connection with LE Legacy security method "Just Works" using bonding

1. Power-up the modules and make their UARTs accessible by the host(s) (115200 Baud, 8n1). After the power-up or after reset the following sequence is sent from the module

Info	Module A	Module B
⇐ Response CMD_GETSTATE_CNF: Module A started in ACTION_IDLE mode.	02 41 02 00 01 01 41	
⇐ Response CMD_GETSTATE_CNF: Module B started in ACTION_IDLE mode.		02 41 02 00 01 01 41

2. Request the FS_BTMAC of both modules.

Info	Module A	Module B
⇒ Request CMD_GET_REQ with settings index 4	02 10 01 00 04 17	
⇐ Response CMD_GET_CNF: FS_BTMAC of module A is 0x55 0x00 0x00 0xDA 0x18 0x00	02 50 07 00 00 55 00 00 DA 18 00 C2	
⇒ Request CMD_GET_REQ with settings index 4		02 10 01 00 04 17
⇐ Response CMD_GET_CNF: FS_BTMAC of module B is 0x11 0x00 0x00 0xDA 0x18 0x00		02 50 07 00 00 11 00 00 DA 18 00 86

3. Configure the parameter RF_SecFlags to use "Just Works with bonding" pairing method for Bluetooth® security.

Info	Module A	Module B
⇒ Perform CMD_SET_REQ with settings index 12 and value 0x0A (Just works with SECFLAGS_BONDING_ENABLE flag set) on module A	02 11 02 00 0C 0A 17	
⇐ Response CMD_SET_CNF (Module will restart to adopt the new value)	02 51 01 00 00 52	
⇐ Response CMD_GETSTATE_CNF	02 41 02 00 01 01 41	
⇒ Perform CMD_SET_REQ with settings index 12 and value 0x0A (Just works with SECFLAGS_BONDING_ENABLE flag set) on module B		02 11 02 00 0C 0A 17

⇒ Response CMD_SET_CNF (Module will restart to adopt the new value)		02 51 01 00 00 52
⇒ Response CMD_GETSTATE_CNF		02 41 02 00 01 01 41

4. Connect module A to module B via Bluetooth®.

Info	Module A	Module B
⇒ Request CMD_CONNECT_REQ with FS_BTMAC of module B	02 06 06 00 11 00 00 DA 18 00 D1	
⇒ Response CMD_CONNECT_CNF: Request understood, try to connect now	02 46 01 00 00 45	
⇒ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 86 07 00 00 11 00 00 DA 18 00 50	
⇒ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 86 07 00 00 55 00 00 DA 18 00 14
⇒ Indication CMD_SECURITY_IND, status 0x01 (encrypted link, bonding established), with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 88 07 00 01 11 00 00 DA 18 00 5F	
⇒ Indication CMD_SECURITY_IND, status 0x01 (encrypted link, bonding established), with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 88 07 00 01 55 00 00 DA 18 00 1B
⇒ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet	02 C6 08 00 00 11 00 00 DA 18 00 F3 EC	
⇒ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet		02 C6 08 00 00 55 00 00 DA 18 00 F3 A8

5. Now module A closes the connection, so both modules will get a disconnect indication.

Info	Module A	Module B
⇒ Request CMD_DISCONNECT_REQ: Disconnect	02 07 00 00 05	

⇐ Response CMD_DISCONNECT_CNF: Request received, disconnect now	02 47 01 00 00 44	
⇐ Indication CMD_DISCONNECT_IND: Connection closed	02 87 01 00 16 92	
⇐ Indication CMD_DISCONNECT_IND: Connection closed		02 87 01 00 13 97

6. Connect module A to module B a second time. Now, since both devices have been bonded before, the exchanged keys are reused.

Info	Module A	Module B
⇒ Request CMD_CONNECT_REQ with FS_BTMAC of module B	02 06 06 00 11 00 00 DA 18 00 D1	
⇐ Response CMD_CONNECT_CNF: Request understood, try to connect now	02 46 01 00 00 45	
⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 86 07 00 00 11 00 00 DA 18 00 50	
⇐ Indication CMD_CONNECT_IND: Physical connection established successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 86 07 00 00 55 00 00 DA 18 00 14
⇐ Indication CMD_SECURITY_IND, status 0x00 (encrypted link to bonded device), with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00	02 88 07 00 00 11 00 00 DA 18 00 5E	
⇐ Indication CMD_SECURITY_IND, status 0x00 (encrypted link to bonded device), with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00		02 88 07 00 00 55 00 00 DA 18 00 1A
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet	02 C6 08 00 00 11 00 00 DA 18 00 F3 EC	
⇐ Indication CMD_CHANNELOPEN_RSP: Channel opened successfully to module with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 and maximum payload size of 0xF3 (243 Bytes) per packet		02 C6 08 00 00 55 00 00 DA 18 00 F3 A8

7. You may want to perform a CMD_FACTORYRESET_REQ to restore default settings.

5.7. Unidirectional connectionless data transmission using Beacons

Besides the connection-based type of data transmission described in the previous section, there exists a second method that uses so called Beacons. In this case, up to 19 bytes of user data can be placed in the Bluetooth® LE scan response packet, which is broadcasted frequently without acknowledgement and without security during advertising.

If a Proteus-II is supposed to broadcast some user data the command `CMD_SETBEACON_REQ` places the payload data, that is marked as "manufacturer data" combined with the Würth Elektronik eiSos company identifier `0x031A`, in the scan response packet.

If a second Proteus-II, which has its Beacon-function enabled (see `RF_BeaconFlags`), is in the operating state `ACTION_SCANNING`, the scan response packet and the containing beacon data is received. Filtering the beacon messages can be enabled or disabled using the user setting `RF_BeaconFlags`.

After the reception of the beacon data, it is output to the connected host using a `CMD_BEACON_IND` message.

To set the module into `ACTION_SCANNING` mode the command `CMD_SCANSTART_REQ` has to be used. Enable the Beacon-function before by setting the corresponding value in the `RF_BeaconFlags` parameter.



This method is very suitable for sensor networks, which frequently send their data to data collectors. Especially when using a slow `RF_ScanTiming` mode, data can be transmitted in very energy efficient way.



Please check the settings `RF_AdvertisingTimeout` and the advertising interval in `RF_ScanTiming` to configure the frequency and interval of transmissions which will have an influence on the current consumption of the module.

Info	Module A	Module B
⇐ Reset both modules using <code>/RESET</code> pin, <code>CMD_GETSTATE_CNF</code>	02 41 02 00 01 01 41	02 41 02 00 01 01 41
⇒ Configure <code>RF_BeaconFlags</code> using <code>CMD_SET_REQ</code> to "beacon rx enabled, no filter"		02 11 02 00 0E 01 1E
⇐ <code>CMD_SET_CNF</code> from module B		02 51 01 00 00 52
⇐ Module B reset such that the change in the user setting takes effect (<code>CMD_GETSTATE_CNF</code>)		02 41 02 00 01 01 41
⇒ Activate scanning on module B		02 09 00 00 0B
⇐ Response <code>CMD_SCANSTART_CNF</code>		02 49 01 00 00 4A
⇒ <code>CMD_SETBEACON_REQ</code> , content "Hallo"	02 0C 05 00 48 61 6C 6C 6F 4D	
⇐ <code>CMD_SETBEACON_CNF</code>	02 4C 01 00 00 4F	

⇐ Receiving multiple CMD_BEACON_IND		02 8C 0C 00 02 00 00 DA 18 00 B5 48 61 6C 6C 6F B1 02 8C 0C 00 02 00 00 DA 18 00 B1 48 61 6C 6C 6F B5
⋮	⋮	⋮
⇒ Deactivate scanning on module B, CMD_SCANSTOP_REQ		02 0A 00 00 08
⇐ Response CMD_SCANSTOP_CNF		02 4A 01 00 00 49
⇒ Reset module A (disable sending beacons), CMD_RESET_REQ	02 00 00 00 02	
⇐ Response CMD_RESET_CNF	02 40 01 00 00 43	
⇐ Response CMD_GETSTATE_CNF	02 41 02 00 01 01 41	

5.8. Energy-efficient distance estimation solutions

The Proteus-II advertising packet contains the TX power value of the transmitting device. This value in combination with the RSSI value of the received advertising packet can be used to estimate the distance between the modules. Using a suitable triangulation algorithm and multiple receivers or transmitters, a position can be approximated.

The advertising packets can be received by performing a passive scan that will not request the scan response. Thus only one frame, instead of three frames, is transmitted per advertising interval.

Besides the FS_BTMAC of the sending module, the RSSI value and the TX power is output in format of a CMD_RSSI_IND message via UART when an advertising packet of another Proteus-II has been received.

To enable this function, the corresponding Bit in the RF_BeaconFlags has to be set.

5.9. Configure the module for low power consumption

Depending on the application environment of the Proteus-II, the goal is to find the optimal trade-off between the module's performance and its power consumption. Therefore, the main settings and operation modes that affect the current consumption are listed below:

- **CMD_SLEEP_REQ:** This command puts the module into ACTION_SLEEP mode, where it consumes the lowest current (<1μA). In this case, both the UART and the Bluetooth® LE interface are shut down.
- **CMD_UARTDISABLE_REQ:** This command disables the UART interface. It is enabled again as soon as the module is reset/woken or when the module outputs a message e.g. when a connection request has been received or the WAKE_UP pin of the module was used.
- **RF_TXPower:** This setting can be used to configure the output power of the module. Reducing the output power saves energy.

- **RF_ScanTiming** and **RF_ScanFactor**: These settings define the timing behavior of the module, when advertising or scanning. The less often the module sends advertising packets or scans, the less current is consumed.
- **RF_ConnectionTiming**: This setting defines the timing behavior of the module during connection setup and an established connection. The less often the connected modules communicate with each other, the less current is consumed.
- The on-board nRF52 SoC is running in debug mode. This will not occur if the pins are connected as described in this manual.



For optimum energy efficiency a user and application specific firmware may be required.

5.10. Start the direct test mode (DTM)

The direct test mode (DTM) enables the test functions described in Bluetooth® Specification. The purpose of DTM is to test the operation of the radio at the physical level, such as transmission power and receiver sensitivity, frequency offset and drift, modulation characteristics, packet error rate and inter modulation performance.

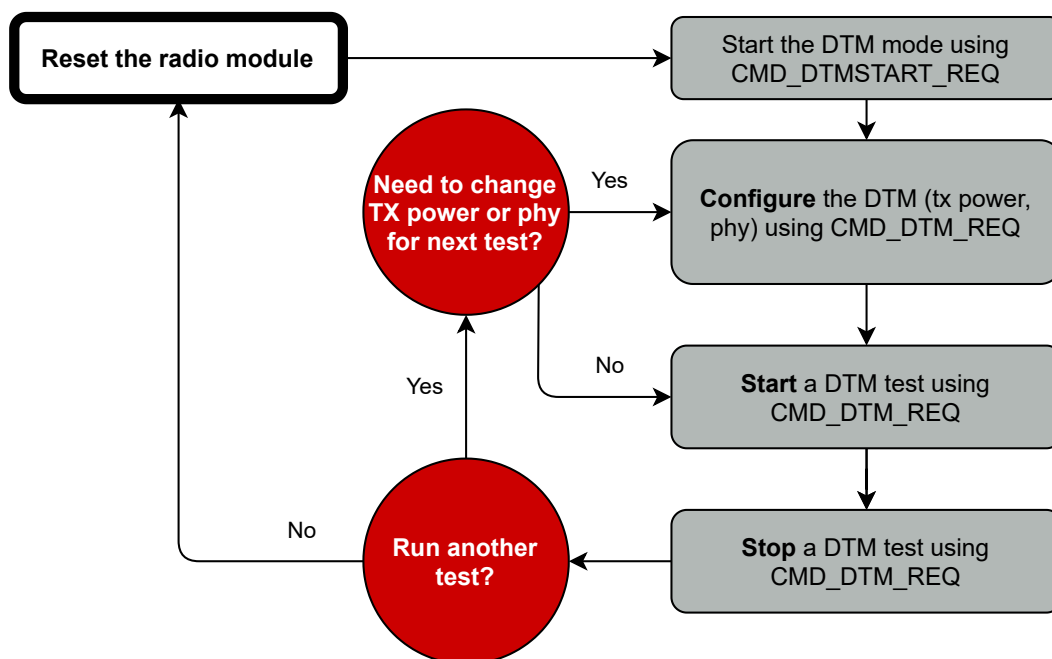


Figure 8: DTM flow chart

Conformance tests of the nRF52 with the DTM application are carried out by dedicated test equipment. To get access to the test functions the `CMD_DTMSTART_REQ`¹ shall be used first. This

¹Please note that the WE UART Terminal [4] PC tool in version 1.3.1.0 or newer supports the DTM function.

command restarts the module in direct test mode. A CMD_GETSTATE_CNF message confirms that the DTM has been started successfully.

Now the CMD_DTM_REQ can be used to configure output power and phy of the subsequent tests. Next, to start and stop the test functions, please use again the CMD_DTM_REQ command. After a test has been started, it has to be stopped before a next test can be run.

Example: Transmission test on channel 0 with Bit pattern 0x0F

The goal of this example is to show how the DTM, and in specific the transmission/reception test, can be run. Here fore we need to connect two modules, start the transmission test on one module and start the reception test on the second module. In this section, all packet data from or to the modules is given in **hexadecimal notation**.

All steps are described in the following:

- First, restart the modules in DTM mode.

Info	Module A	Module B
⇒ Request CMD_DTMSTART_REQ to enable the DTM on module A	02 1D 00 00 1F	
⇐ Response CMD_DTMSTART_CNF: Request understood, try to start DTM now	02 5D 01 00 00 5E	
⇐ Indication CMD_GETSTATE_CNF: Restarted module with DTM enabled	02 41 02 00 10 05 54	
⇒ Request CMD_DTMSTART_REQ to enable the DTM on module B		02 1D 00 00 1F
⇐ Response CMD_DTMSTART_CNF: Request understood, try to start DTM now		02 5D 01 00 00 5E
⇐ Indication CMD_GETSTATE_CNF: Restarted module with DTM enabled		02 41 02 00 10 05 54

- Now both modules are ready for the DTM configuration and operation.
- (Optional) Set both modules to 2 MBit mode (default setting after start-up is 1 MBit).

Info	Module A	Module B
⇒ Request CMD_DTM_REQ to set module A to 2 MBit mode	02 1E 04 00 00 02 02 00 18	
⇐ Response CMD_DTM_CNF: Success	02 5E 03 00 00 00 00 5F	
⇒ Request CMD_DTM_REQ to set module B to 2 MBit mode		02 1E 04 00 00 02 02 00 18
⇐ Response CMD_DTM_CNF: Success		02 5E 03 00 00 00 00 5F

- Set the output power to 4 dBm (default setting after start-up is 0 dBm).

Info	Module A	Module B
⇒ Request CMD_DTM_REQ to set module A to 8 dBm output power	02 1E 04 00 02 04 02 03 1F	
⇐ Response CMD_DTM_CNF: Success	02 5E 03 00 00 00 00 5F	
⇒ Request CMD_DTM_REQ to set module B to 8 dBm output power		02 1E 04 00 02 04 02 03 1F
⇐ Response CMD_DTM_CNF: Success		02 5E 03 00 00 00 00 5F

- After configuration the tests can start. First start the transmission test.

Info	Module A	Module B
⇒ Request CMD_DTM_REQ to start the transmission test on module A with channel 0 and Bit pattern 16 times 0x0F	02 1E 04 00 02 00 10 01 0B	
⇐ Response CMD_DTM_CNF: Started test successfully	02 5E 03 00 00 00 00 5F	

- Start the reception test.

Info	Module A	Module B
⇒ Request CMD_DTM_REQ to start the reception test on module B with channel 0		02 1E 04 00 01 00 00 00 19
⇐ Response CMD_DTM_CNF: Started test successfully		02 5E 03 00 00 00 00 5F

- Stop both tests again.

Info	Module A	Module B
⇒ Request CMD_DTM_REQ to stop the transmission test	02 1E 04 00 03 00 00 01 1A	
⇐ Response CMD_DTM_CNF: Stopped test successfully	02 5E 03 00 00 80 00 DF	
⇒ Request CMD_DTM_REQ to stop the reception test		02 1E 04 00 03 00 00 01 1A
⇐ Response CMD_DTM_CNF: Stopped test successfully, received 0x14FE (5374 _{dec}) packets		02 5E 03 00 00 94 FE 35

During the time the reception and transmission tests were running 5374 data packets have been received by module B, which were transmitted by module A.

5.11. Using the 2MBit phy

Bluetooth® 5 allows to transmit data with 2 MBit data rate. Bluetooth® connections must still be setup using the 1 MBit phy to be backward compatible to Bluetooth® 4.x devices. As soon as a connection has been setup, the connection can be updated to the 2 MBit phy.

To switch to 2 MBit phy after the connection has been setup the Proteus-II offers the command `CMD_PHYUPDATE_REQ`. As response to this request a `CMD_PHYUPDATE_IND` is returned from the Proteus-II, that gives feedback if the connection was switched to the new phy, or if the connection partner rejected the request.



Please note that the 2 MBit phy is an optional feature of Bluetooth® 5 devices and therefore must not be supported.

6. Host connection

6.1. Serial interface: UART

The configuration in factory state of the UART is 115200 Baud without flow control and with data format of 8 data Bits, no parity and 1 stop Bit ("8n1"). The baud rate of the UART can be configured by means of the user setting `UART_BaudrateIndex`. The data format is fixed to 8n1. The flow control can be enabled by means of the user setting `UART_Flags`.

The output of characters on the serial interface runs with secondary priority. For this reason, short interruptions may occur between the outputs of individual successive Bytes. The host must not implement too strict timeouts between two Bytes to be able to receive packets that have interruptions in between.

7. The command interface

The module acts as a slave and can be fully controlled by an external host. The configuration as well as the operation of the module can be managed by predefined commands that are sent as telegrams over the UART interface of the module.

The commands of the command interface can be divided into 3 groups:

- **Requests:** The host requests the module to trigger any action, e.g. in case of the request `CMD_RESET_REQ` the host asks the module to perform a reset.
- **Confirmations:** On each request, the module answers with a confirmation message to give a feedback on the requested operation status. In case of a `CMD_RESET_REQ`, the module answers with a `CMD_RESET_CNF` to tell the host whether the reset will be performed or not.
- **Indications and Responses:** The module indicates spontaneously when a special event has occurred. The `CMD_CONNECT_IND` indicates for example that a connection has been established.

Start signal	Command	Length	Payload	CS
0x02	1 Byte	2 Byte, LSB first	Length Bytes	1 Byte

Start signal: 0x02 (1 Byte)

Command: One of the predefined commands (1 Byte).

Length: Specifies the length of the data that follows. Length is a 16 Bit field with LSB first.

Payload: Variable number (defined by the length field) of data or parameters.

Checksum: Byte wise XOR combination of all preceding Bytes including the start signal, i.e.
 $0x02 \wedge \text{Command} \wedge \text{Length} \wedge \text{Payload} = \text{CS}$



Host integration example codes for checksum calculation and command frame structure can be found in annex A and B, as well as in the *Wireless Connectivity SDK*.



If the transmission of the UART command has not finished within the packet transmission duration (depending on the currently selected UART Baud rate + 5ms after having received the start signal), the module will discard the received Bytes and wait for a new command. This means that the delay between 2 successive Bytes in a frame must be kept as low as possible.



Please note that the different commands are only valid in specific module states (see Figure 7). If a command is not permitted in the current state, the command confirmation returns "Operation not permitted" as a response.

7.1. Scan for other modules in range

7.1.1. CMD_SCANSTART_REQ

This command starts the scan operation to find other Proteus-II in range. All found devices that fit the Proteus-II specification (i.e. devices that support WE SPP-like service UUID) are saved in an internal data base. Before outputting the data base content using the command CMD_GETDEVICES_REQ, the scan has to be stopped using CMD_SCANSTOP_REQ.

Format:

Start signal	Command	Length	CS
0x02	0x09	0x00 0x00	0x0B

Response (CMD_SCANSTART_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x49	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will start scan now

0x01: Operation failed

0xFF: Operation not permitted

7.1.2. CMD_SCANSTOP_REQ

This command stops the scan operation that was started using CMD_SCANSTART_REQ. It stores the detected Proteus-II FS_BTMAC addresses in an internal database, which can be output using the CMD_GETDEVICES_REQ.

Format:

Start signal	Command	Length	CS
0x02	0x0A	0x00 0x00	0x08

Response (CMD_SCANSTOP_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x4A	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will stop scan now

0x01: Operation failed

0xFF: Operation not permitted

7.1.3. CMD_GETDEVICES_REQ

This command returns the information about the devices found during the last scan operation. #Devices determines the number of devices that have been detected. The corresponding information will be output one after the other in the field behind #Devices in the CMD_GETDEVICES_CNF response. The RSSI and TXPower values are transmitted in the two's complement notation. Format:

Start signal	Command	Length	CS
0x02	0x0B	0x00 0x00	0x09

Response (CMD_GETDEVICES_CNF):

Start signal	Command 0x40	Length	Status	#Devices	Payload	CS
0x02	0x4B	2 Bytes	1 Byte	1 Byte	(Length - 2) Bytes	1 Byte

The Payload sequentially lists the data of the detected #Devices devices. It consists of #Devices times the following telegram (see example below).

BTMAC	RSSI	TXPower	Device name length	Device name
6 Bytes	1 Byte	1 Byte	1 Byte	Device name length Bytes

Status:

0x00: Request received

0x01: Operation failed

0xFF: Operation not permitted



If there are too many devices found to be output, the response of the CMD_GETDEVICES_REQ is split into several CMD_GETDEVICES_CNF messages.



The detected device name is the content of the device name field of the received advertising packet. Thus, in case of the "Complete Local Name" is too long to fit into the device name field of the advertising packet, this could be the "Shortened Local Name" of the device.



If RSSI = 0x80, there is no value available.



If TXPower = 0x80, there is no value available.



If Device name length = 0, then there is no device name available.

7.1.3.1. Example 1

Request for the FS_BTMAC of the devices found during the last scan.

Start signal	Command	Length	CS
0x02	0x0B	0x00 0x00	0x09

Response:

Start signal	Command 0x40	Length	Status	#Devices	Payload	CS
0x02	0x4B	0x1E 0x00	0x00	0x02	0x11 0x00 0x00 0xDA 0x18 0x00 0xE2 0x04 0x05 0x4D 0x4F 0x44 0x20 0x31 0x55 0x00 0x00 0xDA 0x18 0x00 0xE5 0x00 0x05 0x4D 0x4F 0x44 0x20 0x32	0x11

During the last scan two devices have been detected:

- Device 1 with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00, RSSI value of 0xE2 (-30 dBm), TXPower of 0x04 (=+4 dBm) and device name of length 5 with the value of 0x4D4F442031 ("MOD 1").
- Device 2 with FS_BTMAC 0x55 0x00 0x00 0xDA 0x18 0x00 and RSSI value of 0xE5 (-27 dBm), TXPower of 0x00 (0 dBm) and device name 0x4D4F442032 ("MOD 2") of length 5.

7.1.4. CMD_RSSI_IND

This telegram indicates the reception of an advertising packet sent by another Proteus-II module. It can be used to realize a position sensing application. This data can only be received, when the module is in ACTION_SCANNING mode (passive scan is sufficient) and the corresponding Bit in the RF_BeaconFlags is set.

Besides the FS_BTMAC, the RSSI value of the advertising packet and the transmission power of

the sending device are output. Both, the RSSI value and the TX power are in two's complement notation.

The accuracy is $\pm 2\text{dB}$ when inside the RSSI range of -90 to -20 dBm.

The value of the parameter TX power is read from the content of the received advertise packet.

Format:

Start signal	Command	Length	BTMAC	RSSI	TX Power	CS
0x02	0x8B	2 Bytes	6 Byte	1 Byte	1 Byte	1 Byte

7.2. Setup connections

7.2.1. CMD_CONNECT_REQ

This command tries to setup a connection to the Proteus-II, which is identified by the FS_BTMAC used in the command. After the module prints a CMD_CONNECT_CNF to confirm that the request was received, the indication message CMD_CONNECT_IND follows which determines whether the connection request was accepted by the other device.

In case of enabled security features (see the setting RF_SecFlags) a CMD_SECURITY_IND is output in addition.

As soon as the connection setup has been completed and all services have been discovered successfully a CMD_CHANNELOPEN_RSP is printed by the UART. Now data may be sent using the CMD_DATA_REQ.

Format:

Start signal	Command	Length	BTMAC	CS
0x02	0x06	0x06 0x00	6 Bytes	1 Byte

Response (CMD_CONNECT_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x46	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, try to connect to the device with the FS_BTMAC

0x01: Operation failed

0xFF: Operation not permitted

7.2.2. CMD_CONNECT_IND

This telegram indicates the connection status and the FS_BTMAC of the connected device. This indication message is the result of a connection request (CMD_CONNECT_REQ).

Format:

Start signal	Command	Length	Status	BTMAC	CS
0x02	0x86	0x07 0x00	1 Byte	6 Bytes	1 Byte

Status:

0x00: Physical connection established successfully

0x01: Connection failed, e.g. due to a timeout (as defined by RF_ScanTiming)

7.2.3. CMD_SECURITY_IND

This telegram indicates the security status and the FS_BTMAC of the connected device. This indication message is the result of a connection request (CMD_CONNECT_REQ).

Format:

Start signal	Command	Length	Status	BTMAC	CS
0x02	0x88	0x07 0x00	1 Byte	6 Bytes	1 Byte

Status:

0x00: Encrypted link to previously bonded device established

0x01: Bonding successful, encrypted link established

0x02: No bonding, pairing successful, encrypted link established

7.2.4. CMD_CHANNELOPEN_RSP

This command is printed on the UART as soon as connection setup and service discovery has been completed successfully. Now data can be transmitted using the CMD_DATA_REQ. Next to the FS_BTMAC of the connected device, the maximum payload size that is supported by the link is part of this telegram. This indication message is the result of a connection request (CMD_CONNECT_REQ).

Format:

Start signal	Command	Length	Status	BTMAC	Max payload	CS
0x02	0xC6	0x08 0x00	1 Byte	6 Bytes	1 Byte	1 Byte

Status:

0x00: Success

7.2.5. CMD_DISCONNECT_REQ

This command shuts down the existing connection. Thereafter the module prints a CMD_DISCONNECT_CNF to confirm that the request has been received, the indication message CMD_DISCONNECT_IND follows which determines whether the disconnection operation has been performed successfully or not.

Format:

Start signal	Command	Length	CS
0x02	0x07	0x00 0x00	0x05

Response (CMD_DISCONNECT_CNF):

Start signal	Command	Length	Status	CS
0x02	0x47	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, try to disconnect

0x01: Operation failed

0xFF: Operation not permitted

7.2.6. CMD_DISCONNECT_IND

This telegram indicates that the connection has shut down successfully. This indication message is the result of a disconnection request (CMD_DISCONNECT_REQ).

Format:

Start signal	Command	Length	Reason	CS
0x02	0x87	0x01 0x00	1 Byte	1 Byte

Reason:

0x08: Connection timeout

0x13: User terminated connection

0x16: Host terminated connection

0x3B: Connection interval unacceptable

0x3D: Connection terminated due to MIC failure (Not able to connect due to bad link quality, or connection request ignored due to wrong key)

0x3E: Connection setup failed

7.2.7. CMD_PHYUPDATE_REQ

This command allows to update the PHY of the current Bluetooth® LE connection. After the module prints a CMD_PHYUPDATE_CNF it tries to update the PHY. The result is indicated by CMD_PHYUPDATE_IND message.

Format:

Start signal	Command	Length	PHY	CS
0x02	0x1A	0x01 0x00	1 Byte	1 Byte

PHY:

0x01: 1MBit PHY

0x02: 2MBit PHY

Response (CMD_PHYUPDATE_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x5A	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received. Try to update PHY of current connection

0x01: Operation failed, e.g. due to invalid PHY

0xFF: Operation not permitted

7.2.8. CMD_PHYUPDATE_IND

This command indicates that there was an attempt to update the PHY of the existing connection. If the PHY update was successful, the command includes the new PHY for receiving and transmitting direction, as well as the BTMAC of the device connected to. This command is the result of the CMD_PHYUPDATE_REQ.

Format in case of success:

Start signal	Command	Length	Status	PHY Rx	PHY Tx	BTMAC	CS
0x02	0x9A	0x09 0x00	0x00	1 Byte	1 Byte	6 Bytes	1 Byte

PHY Rx/PHY Tx:

0x01: Using 1 MBit PHY now

0x02: Using 2 MBit PHY now

Format in case of failure:

Start signal	Command	Length	Status	Info	CS
0x02	0x9A	0x02 0x00	0x01	1 Byte	1 Byte

Info:

0x1A: Unsupported feature of remote device

7.2.9. CMD_PASSKEY_REQ

When receiving a CMD_PASSKEY_IND during connection setup, the peripheral requests for a pass key to authenticate the connecting device. To answer this request the CMD_PASSKEY_REQ message has to be sent to the Proteus-II central including the passkey of the peripheral. The permissible characters of the passkey are ranging from 0x30 to 0x39 (both included) which are ASCII numbers (0-9).

Format:

Start signal	Command	Length	Pass key	CS
0x02	0x0D	0x06 0x00	6 Bytes	1 Byte

Response (CMD_PASSKEY_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x4D	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Pass key accepted and pass key request answered

0x01: Operation failed, due to invalid pass key

0xFF: Operation not permitted

7.2.10. CMD_PASSKEY_IND

Depending on the security settings of the peripheral, a passkey has to be entered on the central side to authenticate the central device. When such a pass key authentication request is received on the central side this CMD_PASSKEY_IND message is sent to the host. In this case, the passkey has to be entered using the CMD_PASSKEY_REQ to successfully finish the connection procedure.

Format:

Start signal	Command	Length	Status	BTMAC	CS
0x02	0x8D	0x07 0x00	1 Byte	6 Bytes	1 Byte

Status:

0x00: Success

7.2.11. CMD_GETBONDS_REQ

This command requests the MAC addresses of all bonded devices.

Format:

Start signal	Command	Length	CS
0x02	0x0F	0x00 0x00	0x0D

Response (CMD_GETBONDS_CNF):

Start signal	Command 0x40	Length	Status	#Devices	Payload	CS
0x02	0x4F	2 Bytes	1 Byte	1 Byte	(Length - 2) Bytes	1 Byte

The Payload sequentially lists the data of the bonded #Devices devices. It consists of #Devices times the following telegram (see example below).

Bond_ID	BTMAC
2 Bytes	6 Bytes

Status:

0x00: Request successfully processed

0x01: Operation failed

0xFF: Operation not permitted



If there are too many devices, the response of the CMD_GETBONDS_REQ is split into several CMD_GETBONDS_CNF messages.

7.2.11.1. Example 1

Request for the bonding data of the devices in database.

Start signal	Command	Length	CS
0x02	0x0F	0x00 0x00	0x0D

Response:

Start signal	Command 0x40	Length	Status	#Devices	Payload	CS
0x02	0x4F	0x12 0x00	0x00	0x02	0x00 0x00 0x82 0x5C 0xA7 0xE2 0x87 0xD0 0x01 0x00 0x01 0x00 0x00 0xDA 0x18 0x00	0x53

Two devices have been bonded before:

- Device 1 (Bond_ID 0x0000) with FS_BTMAC 0x82 0x5C 0xA7 0xE2 0x87 0xD0
- Device 2 (Bond_ID 0x0001) with FS_BTMAC 0x01 0x00 0x00 0xDA 0x18 0x00

7.2.12. CMD_DELETEBONDS_REQ

This command removes the bonding information of all or single bonded devices. Enter Bond_ID to remove the bonding data of a certain Bond_ID. To remove all bonding data, choose Length equals 0 and leave Bond_ID empty.

Format:

Start signal	Command	Length	Bond_ID	CS
0x02	0x0E	2 Bytes	0 or 2 Bytes	1 Byte

Response (CMD_DELETEBONDS_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x4E	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request successfully processed

0x01: Operation failed (e.g. Bond_ID not found)

0xFF: Operation not permitted

7.2.12.1. Example 1

Request to remove all bonding data.

Start signal	Command	Length	CS
0x02	0x0E	0x00 0x00	0x0C

Response:

Start signal	Command 0x40	Length	Status	CS
0x02	0x4E	0x01 0x00	0x00	0x4D

Successfully removed all bonding information.

7.2.12.2. Example 2

Request to remove the bonding of the device corresponding to Bond_ID 0.

Start signal	Command	Length	Bond_ID	CS
0x02	0x0E	0x02 0x00	0x00 0x00	0x0E

Response:

Start signal	Command 0x40	Length	Status	CS
0x02	0x4E	0x01 0x00	0x00	0x4D

Successfully removed the bonding information.

7.3. Transmit and receive data

7.3.1. CMD_DATA_REQ

This command provides the simple data transfer between two connected modules. Transmission takes place to the previously connected device(s). This command is suitable for transmission for a point-to-point connection. The number of payload data Bytes is negotiated during the connection phase. It can be maximal 243 Bytes, but at least 19 Bytes.

When the data is processed by the module a CMD_DATA_CNF is output by the UART. Additionally a CMD_TXCOMPLETE_RSP will follow as soon as the data has been sent.

The receiving Proteus-II will get a CMD_DATA_IND message containing the transmitted payload data.



In "high throughput mode" the length of data packets may be up to 964 Bytes. For more information please refer to ANR006 Proteus-II High Throughput Mode.

Format:

Start signal	Command	Length	Payload	CS
0x02	0x04	2 Bytes	Length Bytes	1 Byte

Response (CMD_DATA_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x44	2 Bytes	Length Bytes	1 Byte

Status:

0x00: Request received, will send data now

0x01 + 0xXX: Operation failed + 0xXX maximum payload size (if it was exceeded)

0xFF: Operation not permitted

7.3.2. CMD_TXCOMPLETE_RSP

This command is output to the UART as soon as the data, which was requested by a CMD_DATA_REQ has been transmitted successfully.

Format:

Start signal	Command	Length	Status	CS
0x02	0xC4	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Data transmitted successfully

0x01: Data transmission failed

7.3.3. CMD_DATA_IND

This telegram indicates the reception of data sent by the previously connected device. This indication message is the result of a data request (CMD_DATA_REQ) sent to the associated device within a connection.

The CMD_DATA_IND returns the FS_BTMAC of the sending device, the RSSI value of the received data packet and the data received via the RF-interface, which can be found in the payload. The RSSI value is printed in two's complement notation.

Format:

Start signal	Command	Length	BTMAC	RSSI	Payload	CS
0x02	0x84	2 Bytes	6 Bytes	1 Byte	(Length - 7) Bytes	1 Byte

7.3.4. CMD_SETBEACON_REQ

This command is used to place user data in the scan response packet. The data is broadcasted frequently without acknowledgement and security. No connection is needed for this mode of operation.

It can be received by any scanning Proteus-II with Beacon-function enabled (see RF_BeaconFlags). The receiving module will output a CMD_BEACON_IND indication message containing the transmitted data. See chapter 5.7 for more information.

Choosing 0x00 as Length and leaving the Payload field empty will remove the data from the scan response packet. The number of payload data Bytes is limited to 19.

Format:

Start signal	Command	Length	Payload	CS
0x02	0x0C	2 Bytes	Length Bytes	1 Byte

Response (CMD_SETBEACON_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x4C	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will place data now

0x01: Operation failed

0xFF: Operation not permitted

7.3.5. CMD_BEACON_IND

This telegram indicates the reception of data Bytes that have been transmitted in a beacon-packet. This data can only be received, when the module is in ACTION_SCANNING mode and the beacon-function is enabled (see RF_BeaconFlags).

The data received via the RF-interface can be found in the payload of the CMD_BEACON_IND

telegram. Besides this, the FS_BTMAC of the sending device and the RSSI value of the data packet are output as well. The RSSI value is output in two's complement notation.

Format:

Start signal	Command	Length	BTMAC	RSSI	Payload	CS
0x02	0x8C	2 Bytes	6 Bytes	1 Byte	(Length - 7) Bytes	1 Byte

7.4. Configuring the module and modifying the device settings



It is strongly recommended to have identical settings on all devices, which have to open a connection with each other or are to be used in Beacon mode.

The module's parameters are stored in flash, but have a local copy in RAM. The flash parameters can be modified by the `CMD_SET_REQ`, read by the `CMD_GET_REQ` and retain their content even when resetting the module.

7.4.1. `CMD_SET_REQ`

This command enables direct manipulation of the parameters in the module's settings in flash. The respective parameters are accessed by means of the corresponding settings index, which can be found in Table 52.

Parameters of 2 or more Bytes have to be transferred with the LSB first unless noted differently in the corresponding description.



The modified parameters only take effect after a restart of the module. This may be done by a `CMD_RESET_REQ` if the module does not restart automatically.



The flash memory used to store these settings has a limited count of write cycles. Try to avoid performing periodic `CMD_SET_REQ` as each command will use one write cycle.



The validity of the specified parameters is not verified. Incorrect values can result in device malfunction!



To save the parameters in the flash memory of the module, the particular memory segment must first be flushed entirely and then restored from RAM. If a reset occurs during this procedure, the entire memory area may be corrupted (e.g. due to supply voltage fluctuations).

Recommendation: First, verify the configuration of the module with `CMD_GET_REQ` and only then apply a `CMD_SET_REQ` if required to avoid unnecessary flash cycles.

Format:

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	2 Bytes	1 Byte	(Length - 1) Bytes	1 Byte

Response (CMD_SET_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, settings set successfully

0x01: Operation failed due to invalid parameter

0x04: Serious error, when writing flash. Try to factory reset or re-flash the device

0xFF: Operation not permitted

7.4.1.1. Example 1

Setting the advertising time RF_AdvertisingTimeout to 180 seconds.

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x03 0x00	0x07	0xB4 0x00	0xA3

Response:

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

Setting was set successfully.

7.4.1.2. Example 2

Setting the static pass key RF_StaticPasskey to "123456".

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x07 0x00	0x12	0x31 0x32 0x33 0x34 0x35 0x36	0x01

Response:

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

Setting was set successfully.

7.4.2. CMD_GET_REQ

This command can be used to query individual setting parameters in flash. The respective parameters are accessed by means of the corresponding settings index, which can be found in Table 52.

Parameters of 2 or more Bytes have to be transferred with the LSB first unless noted differently in the corresponding description.

Read access to the memory area outside the setting is blocked.

Format:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	1 Byte	1 Byte

Response (CMD_GET_CNF):

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	2 Bytes	1 Byte	(Length - 1) Bytes	1 Byte

Status:

0x00: Request received, read out of setting successful

0x01: Operation failed

0xFF: Operation not permitted

7.4.2.1. Example 1

Request the current static pass key RF_StaticPasskey.

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x12	0x01

Response: The current RF_StaticPasskey in flash is "123123" (0x31 0x32 0x33 0x31 0x32 0x33).

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x07 0x00	0x00	0x31 0x32 0x33 0x31 0x32 0x33	0x55

Setting was read successfully.

7.5. Manage the device state

7.5.1. CMD_GETSTATE_REQ

This command returns the current state of the module.



Please refer to chapter 5 for details on the states of the module.

Format:

Start signal	Command	Length	CS
0x02	0x01	0x00 0x00	0x03

Response (CMD_GETSTATE_CNF):

Start signal	Command 0x40	Length	Module role	Module action	More info	CS
0x02	0x41	2 Bytes	1 Byte	1 Byte	(Length - 2) Bytes	1 Byte

Module role:

0x00: No role

0x01: Peripheral

0x02: Central

0x10: Direct test mode (DTM)

Other: Reserved

Module action:

0x00: No action

0x01: Idle (advertising)

0x02: Scanning

0x03: Connected (More info is the 6 Bytes FS_BTMAC address of the connected device)

0x04: Sleep (system-off mode)

0x05: Direct test mode

0x06: Connected, but link is still closed (central must enable notifications first)

7.5.1.1. Example 1

Get the current state of the module.

Start signal	Command	Length	CS
0x02	0x01	0x00 0x00	0x03

Response:

Start signal	Command 0x40	Length	Module role	Module actions	More info	CS
0x02	0x41	0x08 0x00	0x02	0x03	0x11 0x00 0x00 0xDA 0x18 0x00	0x99

The module is connected to another module with FS_BTMAC 0x11 0x00 0x00 0xDA 0x18 0x00.

7.5.2. CMD_RESET_REQ

This command triggers a software reset of the module.

Format:

Start signal	Command	Length	CS
0x02	0x00	0x00 0x00	0x02

Response (CMD_RESET_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x40	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will perform reset now

0x01: Operation failed

0xFF: Operation not permitted

7.5.3. CMD_SLEEP_REQ

This command is used to start the system-off mode (ACTION_SLEEP). After entering this mode, the module has to be woken up using the *WAKE_UP* pin (apply a low signal at this for at least 5ms and release it to high again) before any other action can be performed. The UART interface as well as the Bluetooth® LE interface are shut down in this mode. For more details, please see also chapter 5.4.

Format:

Start signal	Command	Length	CS
0x02	0x02	0x00 0x00	0x00

Response (CMD_SLEEP_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x42	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will go to sleep now

0x01: Operation failed

0xFF: Operation not permitted



Please note that the *WAKE_UP* pin has a second function. If the module is not in *ACTION_SLEEP* mode and the UART was disabled using the *CMD_UARTDISABLE_REQ*, the UART can be re-enabled by applying falling edge, holding the line low for at least 10 ms before applying a rising edge and holding it high for at least 10 ms. In this case the module answers with a *CMD_UARTENABLE_IND* message.

7.5.4. CMD_SLEEP_IND

This indication is sent by the module when the *RF_AdvertisingTimeout* has expired without a connection to the module.

Format:

Start signal	Command	Length	Status	CS
0x02	0x82	0x01 0x00	0x00	1 Byte

Status:

0x00: Advertising timeout detected, will go to sleep now

7.5.5. CMD_FACTORYRESET_REQ

This command triggers a factory reset of the module. First, the default user settings are re-stored, then the module is reset.

Format:

Start signal	Command	Length	CS
0x02	0x1C	0x00 0x00	0x1E

Response (*CMD_FACTORYRESET_CNF*):

Start signal	Command 0x40	Length	Status	CS
0x02	0x5C	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will perform factory reset now

0x01: Operation failed

0xFF: Operation not permitted



To save the parameters in the flash memory of the module, the particular memory segment must first be flushed entirely and then restored from RAM. If a reset occurs during this procedure (e.g. due to supply voltage fluctuations), the entire memory area may be destroyed.



During start-up of the device, the user settings memory is checked for consistency. In case of inconsistency (e.g. the memory was erased) the device will perform a factory reset.



This command also removes all bonding data.

7.5.6. CMD_UARTDISABLE_REQ

This command disables the UART of the module. It will be re-enabled when the module has to send data to the host (e.g. data was received via RF or a state is indicated) or if the *WAKE_UP* pin is used (apply a falling edge, hold low for at least 10 ms before applying a rising edge and hold high for at least 10 ms). In this case, either the received data or a CMD_UARTENABLE_IND is transmitted by the module. Afterwards the UART will stay active until another CMD_UARTDISABLE_REQ or CMD_SLEEP_REQ or a timer triggered sleep event occurs.

Format:

Start signal	Command	Length	CS
0x02	0x1B	0x00 0x00	0x19

Response (CMD_UARTDISABLE_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x5B	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will disable UART now

0x01: Operation failed

0xFF: Operation not permitted



We insistently recommend disabling the UART using this command only, if it is foreseeable that there will be no UART communication for several seconds! Use cases could be during advertising phase to wait for connecting Bluetooth® LE devices or when broadcasting data via Beacons.



Disabling the UART peripheral of the module results in a reduction of current consumption of about 1.15mA.



Please note that the *WAKE_UP* pin has a second function. If the module is in *ACTION_SLEEP* mode, this pin wakes up the module by applying a low signal at this for at least 5ms and releasing it to high. In this case, the module answers with a *CMD_GETSTATE_CNF*.

7.5.7. CMD_UARTENABLE_IND

This indication is shown when the UART of the module is re-enabled (after performing a *CMD_UARTDISABLE_REQ* followed by using the *WAKE_UP* pin). After receiving this message the UART can be used for any operation again.

Format:

Start signal	Command	Length	Status	CS
0x02	0x9B	0x01 0x00	1 Byte	1 Byte

Status:

0x00: UART has been re-enabled successfully

7.5.8. CMD_BOOTLOADER_REQ

This command resets the module and starts the OTA bootloader.



Please refer to chapter 13 on how to use the bootloader for a firmware update.



Please note that you can only exit the bootloader mode by performing a hardware reset using the respective pin.



The bootloader mode will also be enabled if the firmware image is marked "invalid" or if the *BOOT* pin logic level (set by the host) is set to start the bootloader during start-up of the module.

Format:

Start signal	Command	Length	CS
0x02	0x1F	0x00 0x00	0x1D

Response (CMD_BOOTLOADER_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x5F	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will start bootloader now

0x01: Operation failed

0xFF: Operation not permitted

7.6. Run the Bluetooth test modes

The test modes "DTM" as specified by the Bluetooth® SIG are defined in the Bluetooth® Core specification.

7.6.1. CMD_DTMSTART_REQ

This command restarts the module in direct test mode (DTM). When starting in DTM mode, a CMD_GETSTATE_CNF message follows which indicates that the test mode has been enabled successfully. Now the CMD_DTM_REQ can be used to start and stop various test modes.

As soon as the module is reset, the DTM will be left again and normal operations can be performed.

Performing a reset will leave the DTM and restart the module in the ACTION_IDLE state.

Format:

Start signal	Command	Length	CS
0x02	0x1D	0x00 0x00	0x1F

Response (CMD_DTMSTART_CNF):

Start signal	Command 0x40	Length	Status	CS
0x02	0x5D	0x01 0x00	1 Byte	1 Byte

Status:

0x00: Request received, will enable the direct test mode now

0x01: Operation failed

0xFF: Operation not permitted

7.6.2. CMD_DTM_REQ

This command starts and stops various test modes. To be able to run these test modes, the DTM has to be enabled first using the CMD_DTMSTART_REQ. After a test has been started, it has to be stopped first before a next test can be run.

The default TX power value is 0 dBm, the allowed range is from -40 up to +4 dBm in steps of 4 dB (see chapter 8.17).

The valid range for channel (or Vendor option in case of Vendor Command = Carrier Test) is 0...39.



Configuring the phy and TX power can be only done, when the test is stopped (no TX or RX test ongoing).

Format:

Start signal	Command	Length	Command code	Channel / Vendor option	Length / Vendor command	Payload	CS
0x02	0x1E	0x04 0x00	1 Byte	1 Byte	1 Byte	1 Byte	1 Byte

Command code:

0x00: DTM reset (note: this command does not perform a module reset.

0x01: Start RX test

0x02: Start TX test

0x03: Stop last test

Payload:

0x00: Bit pattern PRBS9

0x01: Bit pattern 0x0F

0x02: Bit pattern 0x55

0x03: Vendor specific

Payload \neq Vendor specific (0x00, 0x01 or 0x02)	Payload = Vendor specific (0x03)
Length / Vendor Command: Length of the packet to send	Length / Vendor Command: 0x00: Carrier test 0x02: Set transmission power
Channel: Frequency = $(2402 + \text{Channel} * 2)$ MHz to be used for RX/TX	Vendor option: (dependent on used "Vendor command") Frequency = $(2402 + [\text{Vendor option}] * 2)$ MHz or [Vendor option] := TXPower (in two's complement notation) in steps of 4 dB

Response (CMD_DTM_CNF):

Start signal	Command 0x40	Length	Status	Result	CS
0x02	0x5E	2 Bytes	1 Byte	0-2 Bytes	1 Byte

Status:

0x00: Request received

0x01: Operation failed

0x03: Busy

0xFF: Operation not permitted

Result:

0x0000: Test success

0x0001: Test failed

0x8000 + n: Received n packets during RX test



See also the example in chapter 5.10.

7.6.2.1. Example: Transmission, 16 times 0x0F, channel 0

Start the transmission test on channel 0 (2402 MHz). The packets consist of 16 times 0x0F:

Start signal	Command	Length	Command code	Channel / Vendor option	Length / Vendor command	Payload	CS
0x02	0x1E	0x04 0x00	0x02	0x00	0x10	0x01	0x0B

Response:

Start signal	Command 0x40	Length	Status	Result	CS
0x02	0x5E	0x03 0x00	0x00	0x00 0x00	0x5F

Test started successfully. Now stop the test again.

Start signal	Command	Length	Command code	Channel / Vendor option	Length / Vendor command	Payload	CS
0x02	0x1E	0x04 0x00	0x03	0x00	0x00	0x01	0x0B

Response:

Start signal	Command 0x40	Length	Status	Result	CS
0x02	0x5E	0x03 0x00	0x00	0x80 0x00	0xDF

Test stopped successfully and received 0 packets.

7.6.2.2. Example: Receiver, channel 0

Start the reception test on channel 0 (2402 MHz) with Bit pattern 0x0F:

Start signal	Command	Length	Command code	Channel / Vendor option	Length / Vendor command	Payload	CS
0x02	0x1E	0x04 0x00	0x01	0x00	0x00	0x00	0x19

Response:

Start signal	Command 0x40	Length	Status	Result	CS
0x02	0x5E	0x03 0x00	0x00	0x00 0x00	0x5F

Test started successfully. In between we started the transmission test on a second module. When we stop RX test now, we can count the received packets from the transmitting module.

Start signal	Command	Length	Command code	Channel / Vendor option	Length / Vendor command	Payload	CS
0x02	0x1E	0x04 0x00	0x03	0x00	0x00	0x01	0x1A

Response:

Start signal	Command 0x40	Length	Status	Result	CS
0x02	0x5E	0x03 0x00	0x00	0x8E 0x67	0xB6

Test stopped successfully and received 0x0E67 (3687) packets.

7.6.2.3. Example: Transmission, carrier test, channel 0

Start the carrier test on channel 0 (2402 MHz). We need to use a vendor specific command:

Start signal	Command	Length	Command code	Channel / Vendor option	Length / Vendor command	Payload	CS
0x02	0x1E	0x04 0x00	0x02	0x00	0x00	0x03	0x19

Response:

Start signal	Command 0x40	Length	Status	Result	CS
0x02	0x5E	0x03 0x00	0x00	0x00 0x00	0x5F

See the previous example to stop the test again.

7.6.2.4. Example: Set TX power to -4 dBm

Set the TX power to -4 dBm (0xFC in two's complement notation):

Start signal	Command	Length	Command code	Channel / Vendor option	Length / Vendor command	Payload	CS
0x02	0x1E	0x04 0x00	0x02	0xFC	0x02	0x03	0xE7

Response:

Start signal	Command 0x40	Length	Status	Result	CS
0x02	0x5E	0x03 0x00	0x00	0x00 0x00	0x5F

See the previous example to stop the test again.

7.7. Other messages

7.7.1. CMD_ERROR_IND

This indication is shown when the module entered an error state.

Format:

Start signal	Command	Length	Status	CS
0x02	0xA2	0x01 0x00	1 Byte	1 Byte

Status:

0x01: UART_COMMUNICATION_ERROR The UART had a buffer overflow. Thus, UART TX and RX was aborted and UART has restarted. Please restart module if UART is still malfunctioning.

7.8. Message overview

Start signal	CMD	Message name	Short description	Chapter
0x02	0x00	CMD_RESET_REQ	Reset the module	7.5.2
0x02	0x01	CMD_GETSTATE_REQ	Request the current module state	7.5.1
0x02	0x02	CMD_SLEEP_REQ	Go to sleep	7.5.3
0x02	0x04	CMD_DATA_REQ	Send data to the connected device	7.3.1
0x02	0x06	CMD_CONNECT_REQ	Setup a connection with another device	7.2.1
0x02	0x07	CMD_DISCONNECT_REQ	Close the connection	7.2.5
0x02	0x09	CMD_SCANSTART_REQ	Start scan	7.1.1
0x02	0x0A	CMD_SCANSTOP_REQ	Stop scan	7.1.2
0x02	0x0B	CMD_GETDEVICES_REQ	Request the scanned/detected devices	7.1.3
0x02	0x0C	CMD_SETBEACON_REQ	Place data in scan response packet	7.3.4
0x02	0x0D	CMD_PASSKEY_REQ	Respond to a pass key request	7.2.9
0x02	0x0E	CMD_DELETEBONDS_REQ	Delete bonding information	7.2.12
0x02	0x0F	CMD_GETBONDS_REQ	Read the MACs of bonded devices	7.2.11
0x02	0x10	CMD_GET_REQ	Read the module settings in flash	7.4.2
0x02	0x11	CMD_SET_REQ	Modify the module settings in flash	7.4.1
0x02	0x1A	CMD_PHYUPDATE_REQ	Update the PHY	7.2.7
0x02	0x1B	CMD_UARTDISABLE_REQ	Disable the UART	7.5.6
0x02	0x1C	CMD_FACTORYRESET_REQ	Perform a factory reset	7.5.5
0x02	0x1D	CMD_DTMSTART_REQ	Enable the direct test mode	7.6.1
0x02	0x1E	CMD_DTM_REQ	Start/stop a test of the direct test mode	7.6.2
0x02	0x1F	CMD_BOOTLOADER_REQ	Switch to the bootloader	7.5.8

Table 44: Message overview: Requests

Start signal	CMD	Message name	Short description	Chapter
0x02	0x40	CMD_RESET_CNF	Reset request received	7.5.2
0x02	0x41	CMD_GETSTATE_CNF	Return the current module state	7.5.1
0x02	0x42	CMD_SLEEP_CNF	Sleep request received	7.5.3
0x02	0x44	CMD_DATA_CNF	Data transmission request received	7.3.1
0x02	0x46	CMD_CONNECT_CNF	Connection setup request received	7.2.1

0x02	0x47	CMD_DISCONNECT_CNF	Disconnection request received	7.2.5
0x02	0x49	CMD_SCANSTART_CNF	Scan started	7.1.1
0x02	0x4A	CMD_SCANSTOP_CNF	Scan stopped	7.1.2
0x02	0x4B	CMD_GETDEVICES_CNF	Output the scanned/detected devices	7.1.3
0x02	0x4C	CMD_SETBEACON_CNF	Data is placed in scan response packet	7.3.4
0x02	0x4D	CMD_PASSKEY_CNF	Received the pass key	7.2.9
0x02	0x4E	CMD_DELETEBONDS_CNF	Deleted bonding information	7.2.12
0x02	0x4F	CMD_GETBONDS_CNF	Return the MAC of all bonded devices	7.2.11
0x02	0x50	CMD_GET_CNF	Return the requested module flash settings	7.4.2
0x02	0x51	CMD_SET_CNF	Module flash settings have been modified	7.4.1
0x02	0x5A	CMD_PHYUPDATE_CNF	Update Phy request received	7.2.7
0x02	0x5B	CMD_UARTDISABLE_CNF	Disable UART request received	7.5.6
0x02	0x5C	CMD_FACTORYRESET_CNF	Factory reset request received	7.5.5
0x02	0x5D	CMD_DTMSTART_CNF	Enable the direct test mode now	7.6.1
0x02	0x5E	CMD_DTM_CNF	Test of direct test mode started/stopped	7.6.2
0x02	0x5F	CMD_BOOTLOADER_CNF	Will switch to bootloader now	7.5.8

Table 45: Message overview: Confirmations

Start signal	CMD	Message name	Short description	Chapter
0x02	0x82	CMD_SLEEP_IND	State will be changed to ACTION_SLEEP	7.5.4
0x02	0x84	CMD_DATA_IND	Data has been received	7.3.3
0x02	0x86	CMD_CONNECT_IND	Connection established	7.2.2
0x02	0x87	CMD_DISCONNECT_IND	Disconnected	7.2.6
0x02	0x88	CMD_SECURITY_IND	Secured connection established	7.2.3
0x02	0x8B	CMD_RSSI_IND	Advertising package detected	7.1.4
0x02	0x8C	CMD_BEACON_IND	Received Beacon data	7.3.5
0x02	0x8D	CMD_PASSKEY_IND	Received a pass key request	7.2.10
0x02	0x9A	CMD_PHYUPDATE_IND	PHY has been updated	7.2.8
0x02	0x9B	CMD_UARTENABLE_IND	UART was re-enabled	7.5.7
0x02	0xA2	CMD_ERROR_IND	Entered error state	7.7.1

0x02	0xC4	CMD_TXCOMPLETE_RSP	Data has been sent	7.3.2
0x02	0xC6	CMD_CHANNELOPEN_RSP	Channel open, data transmission possible	7.2.4

Table 46: Message overview: Indications

8. User settings - Module configuration values

The settings described in this chapter are stored permanently in the module's flash memory. Depending on their corresponding permissions, their current values can be read out by the CMD_GET_REQ command or modified by the CMD_SET_REQ command. To do so the corresponding settings index is used, which can be found in the primary table of each setting description. These settings cannot be accessed (read, write) from the Peripheral only mode introduced in a follow-up chapter.



The validity of the specified parameters is not verified. Incorrect values can result in device malfunction.



After the modification of the non-volatile parameters, a reset will be necessary for the changes to be applied.

8.1. FS_DeviceInfo: Read the chip type and OS version

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
15	FS_DeviceInfo	-	-	read	12

This setting contains information about the chip type and the OS version. The value of FS_DeviceInfo is composed of the following 4 sub parameters (ordered by appearance in the response):

OS version	Build code	Package variant	Chip ID
2 Bytes	4 Bytes	2 Bytes	4 Bytes

OS version:

0x00A8 : Softdevice S132 6.0.0

Build code:

- ASCII coded (see the following table 47)

Package variant:

0x2000: QFN

0x2002: CI

Chip ID:

0x00052832 : nRF52832

Packet variant	Build code	Package	Flash size	RAM size
QF	AAB0	QFN48	512 kB	64 kB
QF	ABB0	QFN48	256 kB	32 kB
CI	AABA, AAB0, AAB1, AAE0, AAE1	WLCSP	512 kB	64 kB

Table 47: nRF52832 IC revision overview

8.1.1. Example 1

Request the device info of the module using CMD_GET_REQ with settings index 15

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x0F	0x1C

Response CMD_GET_CNF: Successfully read out the device info (with Byte order changed to MSB first):

OS version = 0x0088 (Softdevice S132 2.0.1)

Build code = 0x41414241 (AABA)

Package variant = 0x2002 (CI)

Chip ID = 0x00052832

Please note that LSB is transmitted first in case of parameters with more than 1 Byte length.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x0D 0x00	0x00	0x88 0x00 0x41 0x42 0x41 0x41 0x02 0x20 0x32 0x28 0x05 0x00	0xE9

8.2. FS_FWVersion: Read the firmware version

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
1	FS_FWVersion	-	-	read	3

This setting contains the firmware version of the module.

8.2.1. Example 1

Request the firmware version of the module using CMD_GET_REQ with settings index 1

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x01	0x12

Response CMD_GET_CNF: Successfully read out the firmware version, for this example it is 0x000001 so "1.0.0" (with the parameter reverted to MSB first).

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x04 0x00	0x00	0x00 0x00 0x01	0x57

8.3. FS_MAC: Read the MAC address

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
3	FS_MAC	-	-	read	6

This setting contains the unique MAC address of the module.

8.3.1. Example 1

Request the MAC address of the module using CMD_GET_REQ with settings index 3

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x03	0x10

Response CMD_GET_CNF: Successfully read out the MAC address 0x55 0x93 0x19 0x6E 0x5B 0x87

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x07 0x00	0x00	0x55 0x93 0x19 0x6E 0x5B 0x87	0x38

8.4. FS_BTMAC: Read the Bluetooth conform MAC address

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
4	FS_BTMAC	-	-	read	6

This setting contains the Bluetooth® LE conform MAC address of the module. The FS_BTMAC is introduced and used to find the respective device on the RF-interface. It consists of the Würth Elektronik eiSos MAC ID 0x0018DA followed by the FS_SerialNumber of the module. Please note that LSB is transmitted first in all commands.

8.4.1. Example 1

Request the Bluetooth®-conform MAC address of the module using CMD_GET_REQ with settings index 4

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x04	0x17

Response CMD_GET_CNF: Successfully read out the Bluetooth® LE conform MAC address 0x11 0x00 0x00 0xDA 0x18 0x00.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x07 0x00	0x00	0x11 0x00 0x00 0xDA 0x18 0x00	0x86

8.5. FS_SerialNumber: Read the serial number of the module

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
16	FS_SerialNumber	-	-	read	3

This setting contains the serial number of the module.

8.5.1. Example 1

Request the serial number of the module using CMD_GET_REQ with settings index 16

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x10	0x03

Response CMD_GET_CNF: Successfully read out the serial number, it is 0.0.11

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x04 0x00	0x00	0x11 0x00 0x00	0x57

8.6. RF_DeviceName: Modify the device name

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
2	RF_DeviceName	See description	"A2623"	read/write	1-31



This parameter is using MSB first notation.

This parameter determines the name of the module, which is used in the advertising packets as well as in the Generic Access Profile (GAP). The permissible characters are in the range of 0x20 - 0x7E which are special characters (see ASCII table), alphabetic characters (a-z and A-Z), numbers (0-9) and whitespace.



The maximum size of the device name that fits into an advertising packet is 5 Bytes in default configuration. With help of the user setting RF_AdvertisingFlags it can be extended to 8 Bytes. Longer device names will be shortened and declared as "Shortened Local Name" in the advertising packet. The full device name is included in the GAP.

8.6.1. Example 1

Set the device name of the module to 0x4D 0x4F 0x44 0x20 0x31 = "MOD 1" using CMD_SET_REQ with settings index 2.

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x06 0x00	0x02	0x4D 0x4F 0x44 0x20 0x31	0x40

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.6.2. Example 2

Request the device name of the module using CMD_GET_REQ with settings index 2:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x02	0x11

Response CMD_GET_CNF: Successfully read out the module as 0x41 0x32 0x36 0x32 0x33 = "A2623".

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x06 0x00	0x00	0x41 0x32 0x36 0x32 0x31	0x12

8.7. RF_StaticPaskey: Modify the static passkey

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
18	RF_StaticPaskey	See description	"123123"	read/write	6

This setting determines the static pass key of the peripheral device used for authentication. If the static pass key security mode is enabled by the peripheral, this key must be entered in the central device. In case of a Proteus-II central, the command to enter this pass key during connection setup is the CMD_PASKEY_REQ.

The permissible characters are ranging from 0x30 to 0x39 (both included) which are ASCII numbers (0-9). This is due to the fact that mobile phones prefer numbers only for the passkey.

8.7.1. Example 1

Set the static pass key of the module to 0x31 0x32 0x33 0x34 0x35 0x36 = "123456" using CMD_SET_REQ with settings index 18

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x07 0x00	0x12	0x31 0x32 0x33 0x34 0x35 0x36	0x01

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.7.2. Example 2

Request the static pass key of the module using CMD_GET_REQ with settings index 18

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x12	0x01

Response CMD_GET_CNF: Successfully read out the key as 0x31 0x32 0x33 0x34 0x35 0x36 = "123456"

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x07 0x00	0x00	0x31 0x32 0x33 0x34 0x35 0x36	0x52

8.8. RF_SecFlags: Modify the security settings

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
12	RF_SecFlags	See description	0	read/write	1

This 8-Bit field configures security settings of the module. Chapter 5.6 contains further information about secure connections.



When connecting from a Proteus-II to another Proteus-II, be sure that the same security mode is used.



When connecting from a foreign device to a Proteus-II, the peripheral (Proteus-II) determines the minimum security level needed for communication. So configure the RF_SecFlags of the peripheral to set the desired security level.



When updating this user setting (like enabling bonding or changing the security mode) please remove all existing bonding data using the command `CMD_DELETEBONDS_REQ`.

Bit no.	Description		
2 : 0	Security mode configuration. Depending on its value, different modes are chosen when setting up a secure connection. In firmware version 2.1.0 and newer the peripheral decides which is the minimum security level to access its data.		
	0x0	No security	Data is transmitted without authentication and encryption.
	0x2	Just works level 1.2	Each time a connection is established, new random keys are exchanged in advance to use them for data encryption. This mode uses the "just works" method.
	0x3	Static pass key level 1.3	For authentication, the <code>RF_StaticPasskey</code> is used. If the peripheral uses this method, the central device must enter the correct passkey to finalize the connection.
	others		Reserved
3	SECFLAGS_BONDING_ENABLE: If this Bit is set, bonding is enabled when using one of the pairing methods. Bonding data of up to 32 devices will be stored in the flash. If bonding storage is full, the bonding information that has not been used for the longest period will be removed.		
7 : 4	Reserved		

Table 48: Security configuration flags

8.8.1. Example 1

Set the security flags to 0x0B, to use the static passkey pairing and with bonding enabled, using `CMD_SET_REQ` with settings index 12

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x0C	0x0B	0x16

Response `CMD_SET_CNF`: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.8.2. Example 2

Request the security flags of the module using `CMD_GET_REQ` with settings index 12

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x0C	0x1F

Response CMD_GET_CNF: Successfully read out the value 2, which means that the just works pairing mode is enabled.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x02	0x52

8.9. RF_SecFlagsPerOnly: Modify the security settings (Peripheral only mode)

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
44	RF_SecFlagsPerOnly	See description	11	read/write	1

Please refer to the setting RF_SecFlags for more details.

8.9.1. Example 1

Set the security flags to 0x02 to use the just works pairing, using CMD_SET_REQ with settings index 44

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x2C	0x02	0x3F

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.9.2. Example 2

Request the security flags of the module using CMD_GET_REQ with settings index 44

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x2C	0x3F

Response CMD_GET_CNF: Successfully read out the value 2, which means that the just works pairing mode is enabled.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x02	0x52

8.10. RF_ScanFlags: Modify the scan behavior

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
13	RF_ScanFlags	See description	0	read/write	1

This 8-Bit field configures the scan behavior of the module. To use multiple settings, add the Bit numbers and choose the result as value for RF_ScanFlags.

Bit no.	Description
0	If this Bit is set, an active scan is performed when using CMD_SCANSTART_REQ. In this case, after receiving an advertising packet a scan request is sent to the advertising module that returns a scan response containing additional information. For the communication of Proteus-II modules, active scanning is only needed when using Beacons. In this case, it is enabled automatically by the firmware. Please note that active scanning increases the current consumption.
15 : 1	Reserved

Table 49: Scan configuration flags

8.10.1. Example 1

Set the scan flags to 0x01 to enable active scanning using CMD_SET_REQ with settings index 13

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x0D	0x01	0x1D

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.10.2. Example 2

Request the scan flags of the module using CMD_GET_REQ with settings index 13

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x0D	0x1E

Response CMD_GET_CNF: Successfully read out the value 0, which means that active scan is disabled.



Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x00	0x50

8.11. RF_BeaconFlags: Interpret the advertising data

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
14	RF_BeaconFlags	See description	0	read/write	1

This 8-Bit field enables/disables the reception of Beacons. To use multiple settings, add the Bit numbers and choose the result as value for RF_BeaconFlags.

Bit no.	Description
1 : 0	Enable/disable the reception of Beacons. To avoid too much traffic on the UART, we recommend to use the filtered version.
	0x0 Reception of Beacons disabled.
	0x1 Receive all Beacons from Proteus-II devices in range. Each received packet is interpreted and output by the UART. In this case, active scanning is performed which increases the current consumption. To decrease the work load of the receiving module, use a sufficiently high UART baud rate at the receiving device and slow advertising intervals at the sending devices.
	0x3 Same as '0x1' plus additional filter. This filter discards redundant packets that contain the same content.
	others Reserved.
2	If this Bit is set, a CMD_RSSI_IND message is output each time when an advertising packet with WE SPP-like UUID is received. This feature can be used to realize a position sensing application, since the CMD_RSSI_IND contains the current TX power level and the current RSSI value besides the FS_BTMAC of the sending device. To decrease the work load of the receiving module, please use a sufficiently high UART baud rate at the receiving device and slow advertising intervals at the sending devices.
15 : 3	Reserved.

Table 50: Beacon configuration flags



The internal database of the module may host the advertising data of 25 different devices. If the data base is full, the oldest entry is removed.



To avoid too much traffic the usage of slow advertising intervals is recommended.

8.11.1. Example 1

Set the Beacon flags to 0x04 using CMD_SET_REQ with settings index 14. Thus when an advertising packet with WE SPP-like UUID is received, a CMD_RSSI_IND message is printed.

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x0E	0x04	0x1B

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.11.2. Example 2

Request the Beacon flags of the module using CMD_GET_REQ with settings index 14

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x0E	0x1D

Response CMD_GET_CNF: Successfully read out the value 3, which means that the reception of Beacons is enabled and double packets are filtered by the module.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x03	0x53

8.12. RF_AdvertisingTimeout: Modify the advertising timeout

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
7	RF_AdvertisingTimeout	0 (infinite), 1 - 650	0	read/write	2

This parameter defines the time in seconds after which the advertising of the module stops. If no peer connects before this timeout, advertising stops and the module goes to system-off mode. If the RF_AdvertisingTimeout is set to 0, the module advertises infinitely.



To ensure that the module sends a sufficient amount of advertising packets per RF_AdvertisingTimeout, please also check the RF_ScanTiming parameter, which defines the frequency of advertising packets.

8.12.1. Example 1

Set the advertising timeout parameter to 0x00 0xB4 (180s) using CMD_SET_REQ with settings index 7.

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x03 0x00	0x07	0xB4 0x00	0xA3

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.12.2. Example 2

Request the advertising timeout of the module using CMD_GET_REQ with settings index 7

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x07	0x14

Response CMD_GET_CNF: Successfully read out the value 0x00 0x00 = 0s, which indicates indefinite advertising.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x03 0x00	0x00	0x00 0x00	0x51

8.13. RF_AdvertisingFlags: Configure the advertising packet

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
29	RF_AdvertisingFlags	0,1	0	read/write	1

The user setting RF_AdvertisingFlags specifies the content of the advertising packet.

Bit no.	Description
0	Define the content of the advertising packet
	0x0 Command mode: Advertising packet contains 5 bytes device name RF_DeviceName and the TX power
	PeripheralOnly mode: Advertising packet contains only 8 bytes device name generated by the FS_BTMAC (A-123456 in case the FS_BTMAC is 0x0018DA123456)
	0x1 All modes: Advertising packet contains only 8 bytes device name RF_DeviceName
	others Reserved.
7 : 1	Reserved.

Table 51: Advertising packet configuration flags



To use the beacon feature (see chapter 5.7) the TX power must be included in the advertising packet.

8.13.1. Example 1

Set the advertising flags to 1 such that command mode and PeripheralOnly mode use the same advertising packet content using the CMD_SET_REQ with settings index 29

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x1D	0x01	0x0D

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.13.2. Example 2

Request the RF_AdvertisingFlags using CMD_GET_REQ with settings index 29:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x1D	0x0E

Response CMD_GET_CNF: Successfully read out the value 0x00.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x00	0x50

8.14. RF_ScanFactor: Modify the scan factor

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
10	RF_ScanFactor	1 - 10	2	read/write	1

This parameter defines the factor between the scan window and the scan interval. See RF_ScanTiming for more information.

Example: Let's assume that the scan window is 50 ms, the RF_ScanFactor is 3, then the module scans for 50 ms on a fixed channel, enters a suspend mode (system-on mode) for 100 ms ($3 \times 50 \text{ ms} - 50 \text{ ms}$), switches the channel, again scans for 50 ms and so on. The larger the RF_ScanFactor, the less time the module scans and thus the less power is consumed, but also the more difficult it is to detect other Bluetooth® LE devices on air.

8.14.1. Example 1

Set the scan factor to 0x03 using CMD_SET_REQ with settings index 10.

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x0A	0x03	0x18

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.14.2. Example 2

Request the scan factor of the module using CMD_GET_REQ with settings index 10

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x0A	0x19

Response CMD_GET_CNF: Successfully read out the value 2.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x02	0x52

8.15. RF_ScanTiming: Modify the scan timing

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
9	RF_ScanTiming	0 - 5	1	read/write	1

The RF_ScanTiming enables the possibility to configure the timing behavior of the module's RF interface during advertising and scanning state. Using this parameter several predefined configurations can be chosen, which include timing parameters, such as the frequency of advertising packets and the length of a scan window.

The choice of the RF_ScanTiming primarily affects the latency of device detection on air as well as the current consumption. The lower the RF_ScanTiming, the faster the modules can find each other for communication, but also the more power will be consumed.

RF_ScanTiming	0	1	2	3 ¹	4 ¹	5 ¹
Advertising interval [ms]	20	40	250	1000	5000	10240
Scan window [ms]	25	50	312	1250	6250	10240
Scan interval [ms]	Defined by the RF_ScanFactor.					
Connection setup timeout [s]	1	2	2	5	20	35
Current consumption	High	...				Low

Further information:

- In ACTION_SCANNING mode, the scan interval defines the time after which the module switches channel to detect other Bluetooth® LE devices in range. See also RF_ScanFactor.
- In ACTION_SCANNING mode, the scan window defines the section of the scan interval, where the module is scanning. During the remaining time, the module enters a suspend mode (system-on mode). See also RF_ScanFactor.
- In ACTION_IDLE mode, the advertising interval defines the time after which the module periodically sends its advertising packet. In between, the module enters a suspend mode (system-on mode).
- The connection setup timeout defines the time after which a connection request has to be answered by the peripheral.



Please ensure that all members of a network support the same advertising and scan timing parameters.

¹Mainly suitable for transmitting data using Beacons without consuming much energy.



To ensure that the module is allowed to send a sufficient amount of advertising packets, please also check the `RF_AdvertisingTimeout` parameter.

8.15.1. Example 1

Set the scan timing parameter to 0x00 using `CMD_SET_REQ` with settings index 9.

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x09	0x00	0x18

Response `CMD_SET_CNF`: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.15.2. Example 2

Request the scan timing parameter of the module using `CMD_GET_REQ` with settings index 9

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x09	0x1A

Response `CMD_GET_CNF`: Successfully read out the value 4.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x04	0x54

8.16. RF_ConnectionTiming: Modify the connection timing

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
8	RF_ConnectionTiming	0 - 10	1	read/write	1

The RF_ConnectionTiming enables the possibility to configure the timing behavior of the module's RF interface during an established connection. Using this parameter several predefined configurations can be chosen, which include the minimum and maximum connection interval, as well as the connection supervision timeout.

The choice of the RF_ConnectionTiming primarily determines how rapidly the connection is established and data is transmitted. The lower the RF_ConnectionTiming, the more frequently the connected devices communicate with each other and thus, the more power is consumed.

RF_ConnectionTiming	0	1	2	3	4	5	6
Minimum connection interval [ms]	7.5	15	45	195	750	2000	7.5
Maximum connection interval [ms]	30	75	250	1000	1995	4000	7.5
Connection supervision timeout [s]	4	4	4	6	6	25	4

RF_ConnectionTiming	7	8	9	10
Minimum connection interval [ms]	7.5	11.25	15	15
Maximum connection interval [ms]	11.25	20	15	30
Connection supervision timeout [s]	4	4	4	4



Please note that the smallest minimum connection interval supported by Android is 11.25 ms. Thus profile 6 cannot be used by Android devices. Further note that iOS supports only profiles, where its minimum connection interval is 15 ms or a multiple of it.



The throughput can be increased by using the so called high throughput mode. This mode and its usage is described in ANR006 Proteus-II High Throughput Mode [2].

Further information:

- The minimum and maximum connection interval parameters specify the borders of the connection interval as determined in the negotiation procedure between the central and the peripheral during connection setup. The connection interval defines the frequency of communication during connection setup and data transmission. If a Proteus-II module A (central) connects to a Proteus-II module B (peripheral), the connection interval settings of the central are used for connection setup. If both modules have different connection interval settings the peripheral requests the central to accept the peripheral's settings after 5s. The central accepts these settings, and thus the peripheral's connection interval is used.

If now another Bluetooth® LE device (e.g. a smart phone) connects as central to a Proteus-II module (peripheral) and the connection interval settings do not coincide, the Proteus-II requests the smart phone to accept its settings after 5s. If the cell phone does not accept the settings, it will be requested a further 3 times with a delay of 10s. If the peripheral's settings request have been rejected in all cases the connection will be shut down. If the smart phone itself requests to update the connection interval of the Proteus-II, the module accepts the request. Reversely, if a Proteus-II (central) connects to another Bluetooth® LE device (peripheral) and the connection interval settings do not coincide, the Proteus-II accepts all requests of the peripheral to update the connection parameter settings.

- The connection supervision timeout defines the time after which an already established connection is considered as lost, when no further communication has occurred.



Please ensure that all members (Proteus-II, cell phones and other Bluetooth® LE devices) of a network use the same connection timing parameters to avoid connection problems and changes of the connection interval during an opened connection.



Please check the minimum connection interval that is supported by iOS. Former iOS devices do not support connection intervals shorter than 30 ms!

8.16.1. Example 1

Set the connection timing parameter to 0x00 using CMD_SET_REQ with settings index 8.

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x08	0x00	0x19

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.16.2. Example 2

Request the connection timing parameter of the module using CMD_GET_REQ with settings index 8

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x08	0x1B

Response CMD_GET_CNF: Successfully read out the value 1.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x01	0x51

8.17. RF_TXPower: Modify the output power

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
17	RF_TXPower	See description	4	read/write	1

This setting determines the output power in dBm of the module. The value has to be entered in hexadecimal and as two's complement. The permissible values are listed in the following table.

Permissible values								
Decimal [dBm]	-40	-20	-16	-12	-8	-4	0	+4
Two's complement, hexadecimal	0xD8	0xEC	0xF0	0xF4	0xF8	0xFC	0x00	0x04

8.17.1. Example 1

Set the output power of the module to -8 dBm, which is 0xF8 in two's complement notation, using CMD_SET_REQ with settings index 17

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x11	0xF8	0xF8

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.17.2. Example 2

Request the output power of the module using CMD_GET_REQ with settings index 17

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x11	0x02

Response CMD_GET_CNF: Successfully read out the value 0x04 = 4dBm

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x04	0x54

8.18. RF_SPPBaseUUID: Configure the SPP base UUID

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
26	RF_SPPBaseUUID	See description	0x6E400000C352 11E5953D0002 A5D5C51B	read/write	16

The WE SPP-like profile consists of the 16 Bytes base UUID 0x6E40xxxx-C352-11E5-953D-0002A5D5C51B plus the 2 Bytes UUIDs for the underlying characteristics:

Characteristic	2 Bytes UUID
Primary service	0x0001
TX_CHARACTERISTIC	0x0002
RX_CHARACTERISTIC	0x0003

With this the TX characteristic can be identified by the resulting 16 Bytes UUID 0x6E400002-C352-11E5-953D-0002A5D5C51B on the radio. With help of the RF_SPPBaseUUID parameter we have to possibility to update the 16Byte base UUID of the WE SPP-like profile.



Please note that the UUID 0xFB349B5F8000008000100000xxxx0000 (0000xxxx-0000-1000-8000-00805f9b34fb) is reserved for 16 Bit UUIDs and must not be used here.

8.18.1. Example 1

Set the base UUID to 0xEFEEEEDEC-EBEA-E9E8-E7E6-E5E4E3E2E1E0 using CMD_SET_REQ with settings index 26

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x11 0x00	0x1A	0xE0 0xE1 0xE2 0xE3 0xE4 0xE5 0xE6 0xE7 0xE8 0xE9 0xEA 0xEB 0xEC 0xED 0xEE 0xEF	0x18

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.18.2. Example 2

Request the base UUID of the module using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x1A	0x09

Response CMD_GET_CNF: Successfully read out the value
0x6E400000-C352-11E5-953D-0002A5D5C51B.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x11 0x00	0x00	0x1B 0xC5 0xD5 0xA5 0x02 0x00 0x3D 0x95 0xE5 0x11 0x52 0xC3 0x00 0x00 0x40 0x6E	0x0C

8.19. RF_Appearance: Configure the appearance of the device

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
25	RF_Appearance	0-65535	0	read/write	2

The user setting RF_Appearance specifies the appearance of the Bluetooth® devices. It's a 2 Bytes field defined by the Bluetooth® SIG. Please check the Bluetooth® Core Specification:Core Specification Supplement, Part A, section 1.12 for permissible values.

8.19.1. Example 1

Set the appearance to "Generic computer" (0x0080) using CMD_SET_REQ with settings index 25

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x03 0x00	0x19	0x80 0x00	0x89

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.19.2. Example 2

Request the RF_Appearance using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x19	0x0A

Response CMD_GET_CNF: Successfully read out the value 0x0000, meaning that the appearance is unknown.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x03 0x00	0x00	0x00 0x00	0x51

8.20. UART_BaudrateIndex: Modify the UART speed

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
11	UART_BaudrateIndex	See description	3	read/write	1

This parameter defines the baud rate used by the module's UART. The permissible values are listed in the following table.

Permissible values							
UART_BaudrateIndex	0	1	2	3	4	5	6
Rate [Baud]	9600	19200	38400	115200	230400	460800	921600



The flow control pins */RTS* and */CTS* can be enabled using the user setting *UART_Flags*. For *UART_BaudrateIndex* 5 and 6 the flow control pins are enabled independent of the *UART_Flags*.



Please note that due to the HF-activity of the chip, single Bytes on the UART can get lost, when using a very fast UART data rate. To avoid losing single bytes, please enable the UART flow control.



For baud rates faster than 230400 Baud, the flow control pins */RTS* and */CTS* are enabled.

The EV-Board Proteus-II-EV version 2.0 does not provide the connection between the flow control pins of the module and the EV-Board's USB port. Thus in this version of the Proteus-II-EV the flow control can be only used, if the on-board UART is disconnected (remove respective jumpers on JP2) and all UART lines (*URXD*, *UTXD*, */RTS* and */CTS*) are connected to an external FTDI cable.



After changing the baud rate using the *CMD_SET_REQ* the module restarts using the new baud rate. Therefore don't forget to update the baud rate of the connected host to be able to further use the module's UART.

8.20.1. Example 1

Set the baud rate index to 0x04 (230400 Baud) using *CMD_SET_REQ* with settings index 11

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x0B	0x04	0x1E

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.20.2. Example 2

Request the baud rate index of the module using CMD_GET_REQ with settings index 11

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x0B	0x18

Response CMD_GET_CNF: Successfully read out the value 0x03, which equals 115200 Baud.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x03	0x53

8.21. UART_Flags: Configure the UART

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
27	UART_Flags	0,1	0	read/write	1

The user setting UART_Flags specifies whether the UART uses flow control or not.

Bit no.	Description
0	Set this Bit to 1 to enable the flow control pins <i>/RTS</i> and <i>/CTS</i> .
1-7	Reserved.



For baud rates faster than 230400 Baud, the flow control pins */RTS* and */CTS* are enabled.

The EV-Board Proteus-II-EV version 2.0 does not provide the connection between the flow control pins of the module and the EV-Board's USB port. Thus in this version of the Proteus-II-EV the flow control can be only used, if the on-board UART is disconnected (remove respective jumpers on JP2) and all UART lines (*URXD*, *UTXD*, */RTS* and */CTS*) are connected to an external FTDI cable.

8.21.1. Example 1

Enable the flow control using CMD_SET_REQ with settings index 27

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x1B	0x01	0x0B

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.21.2. Example 2

Request the UART_Flags using CMD_GET_REQ with settings index 27:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x1B	0x08

Response CMD_GET_CNF: Successfully read out the value 0x00, meaning that the flow control is disabled.



Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x00	0x50

8.22. CFG_Flags: Configure the module

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
28	CFG_Flags	See description	0	read/write	2

The user setting CFG_Flags specifies whether the module uses high throughput mode or not.

Bit no.	Description
0	Set this Bit to 1 to enable the high throughput mode.
4	Set this Bit to 1 to disconnect in case the central device does not respect the peripheral's connection interval.
Others	Reserved.



The high throughput mode and its usage is described in Application Note ANR004 [5].

8.22.1. Example 1

Enable the high throughput mode using CMD_SET_REQ with settings index 28

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x03 0x00	0x1C	0x01 0x00	0x0D

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.22.2. Example 2

Request the CFG_Flags using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x1C	0x0F

Response CMD_GET_CNF: Successfully read out the value 0x00, meaning that the high throughput mode is disabled.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x03 0x00	0x00	0x00 0x00	0x51

8.23. DIS_ManufacturerName: Configure the manufacturer name

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
20	DIS_ManufacturerName	See description	"Default"	read/write	1-64

The user setting DIS_ManufacturerName specifies the content of the manufacturer name field of the Device Information Service. The permissible characters are in the range of 0x20 - 0x7E which are special characters (see ASCII table), alphabetic characters (a-z and A-Z), numbers (0-9) and whitespace.



To add the content of the DIS_ManufacturerName to the DIS profile, please set the corresponding Bit in the DIS_Flags.

8.23.1. Example 1

Set the manufacturer name to "Manufacturer1" using CMD_SET_REQ with settings index 20

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x0E 0x00	0x14	0x4D 0x61 0x6E 0x75 0x66 0x61 0x63 0x74 0x75 0x72 0x65 0x72 0x31	0x0F

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.23.2. Example 2

Request the manufacturer name of the DIS profile using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x14	0x07

Response CMD_GET_CNF: Successfully read out the value "Default".

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x08 0x00	0x00	0x44 0x65 0x66 0x61 0x75 0x6C 0x74	0x11

8.24. DIS_ModelNumber: Configure the model number

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
21	DIS_ModelNumber	See description	"Default"	read/write	1-64

The user setting DIS_ModelNumber specifies the content of the model number field of the Device Information Service. The permissible characters are in the range of 0x20 - 0x7E which are special characters (see ASCII table), alphabetic characters (a-z and A-Z), numbers (0-9) and whitespace.



To add the content of the DIS_ModelNumber to the DIS profile, please set the corresponding Bit in the DIS_Flags.

8.24.1. Example 1

Set the model number to "Model1" using CMD_SET_REQ with settings index 21

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x07 0x00	0x15	0x4D 0x6F 0x64 0x65 0x6C 0x31	0x7F

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.24.2. Example 2

Request the model number of the DIS profile using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x15	0x06

Response CMD_GET_CNF: Successfully read out the value "Default".

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x08 0x00	0x00	0x44 0x65 0x66 0x61 0x75 0x6C 0x74	0x11

8.25. DIS_SerialNumber: Configure the serial number

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
22	DIS_SerialNumber	See description	"Default"	read/write	1-64

The user setting DIS_SerialNumber specifies the content of the serial number field of the Device Information Service. The permissible characters are in the range of 0x20 - 0x7E which are special characters (see ASCII table), alphabetic characters (a-z and A-Z), numbers (0-9) and whitespace.



To add the content of the DIS_SerialNumber to the DIS profile, please set the corresponding Bit in the DIS_Flags.

8.25.1. Example 1

Set the serial number to "1.2.3" using CMD_SET_REQ with settings index 22

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x06 0x00	0x16	0x31 0x2E 0x32 0x2E 0x33	0x33

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.25.2. Example 2

Request the serial number of the DIS profile using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x16	0x05

Response CMD_GET_CNF: Successfully read out the value "Default".

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x08 0x00	0x00	0x44 0x65 0x66 0x61 0x75 0x6C 0x74	0x11

8.26. DIS_HWVersion: Configure the HW version

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
23	DIS_HWVersion	See description	"Default"	read/write	1-16

The user setting DIS_HWVersion specifies the content of the hardware version field of the Device Information Service. The permissible characters are in the range of 0x20 - 0x7E which are special characters (see ASCII table), alphabetic characters (a-z and A-Z), numbers (0-9) and whitespace.



To add the content of the DIS_HWVersion to the DIS profile, please set the corresponding Bit in the DIS_Flags.

8.26.1. Example 1

Set the hardware version to "1.2.3" using CMD_SET_REQ with settings index 23

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x06 0x00	0x17	0x31 0x2E 0x32 0x2E 0x33	0x32

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.26.2. Example 2

Request the hardware version of the DIS profile using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x17	0x04

Response CMD_GET_CNF: Successfully read out the value "Default".

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x08 0x00	0x00	0x44 0x65 0x66 0x61 0x75 0x6C 0x74	0x11

8.27. DIS_SWVersion: Configure the SW version

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
24	DIS_SWVersion	See description	"Default"	read/write	1-16

The user setting DIS_SWVersion specifies the content of the software version field of the Device Information Service. The permissible characters are in the range of 0x20 - 0x7E which are special characters (see ASCII table), alphabetic characters (a-z and A-Z), numbers (0-9) and whitespace.



To add the content of the DIS_SWVersion to the DIS profile, please set the corresponding Bit in the DIS_Flags.

8.27.1. Example 1

Set the software version to "1.2.3" using CMD_SET_REQ with settings index 24

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x06 0x00	0x18	0x31 0x2E 0x32 0x2E 0x33	0x3D

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.27.2. Example 2

Request the software version of the DIS profile using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x18	0x0B

Response CMD_GET_CNF: Successfully read out the value "Default".

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x08 0x00	0x00	0x44 0x65 0x66 0x61 0x75 0x6C 0x74	0x11

8.28. DIS_Flags: Configure the device information service

Settings index	Designation	Permissible values	Default value	Permissions	Number of Bytes
19	DIS_Flags	0-255	0	read/write	1

The user setting DIS_Flags specifies the content of the Device Information Service. To add a specific field, like DIS_ModelNumber to the Device Information Service, the corresponding Bit has to be set in the DIS_Flags.

Bit no.	Description
0	Set this Bit to 1 to add the DIS_ManufacturerName to the Device Information Service.
1	Set this Bit to 1 to add the DIS_ModelNumber to the Device Information Service.
2	Set this Bit to 1 to add the DIS_SerialNumber to the Device Information Service.
3	Set this Bit to 1 to add the DIS_HWVersion to the Device Information Service.
4	Set this Bit to 1 to add the DIS_SWVersion to the Device Information Service.
5-7	Reserved.

8.28.1. Example 1

Add the manufacturer name and model number (Bit0|Bit1 = 0x03) to the Device Information Service using CMD_SET_REQ with settings index 19

Start signal	Command	Length	Settings index	Parameter	CS
0x02	0x11	0x02 0x00	0x13	0x03	0x01

Response CMD_SET_CNF: Successfully modified the setting.

Start signal	Command 0x40	Length	Status	CS
0x02	0x51	0x01 0x00	0x00	0x52

8.28.2. Example 2

Request the DIS_Flags using CMD_GET_REQ:

Start signal	Command	Length	Settings index	CS
0x02	0x10	0x01 0x00	0x13	0x00

Response CMD_GET_CNF: Successfully read out the value 0x00, meaning that the Device Information Service is disabled, since no field was added.

Start signal	Command 0x40	Length	Status	Parameter	CS
0x02	0x50	0x02 0x00	0x00	0x00	0x50

Settings index	Designation	Summary	Permissible values	Default value	Permissions	Number of Bytes
1	FS_FWVersion	Version of the firmware	-	-	read	3
2	RF_DeviceName	Name of the module	See description	"A2623"	read / write	1-31
3	FS_MAC	MAC address of the module	-	-	read	6
4	FS_BTMAC	Bluetooth® LE conform MAC address of the module	-	-	read	6
7	RF_AdvertisingTimeout	Time [s] after advertising stops. LSB first	0 (infinite), 1 - 65535	0	read / write	2
8	RF_ConnectionTiming	Module connection timing configuration	0 - 10	1	read / write	1
9	RF_ScanTiming	Module advertising and scanning timing configuration	0 - 5	1	read / write	1
10	RF_ScanFactor	Factor between scan interval and scan window	1 - 10	2	read / write	1
11	UART_BaudrateIndex	Baud rate of the UART	See description	3	read / write	1
12	RF_SecFlags	Security settings of the module	See description	0	read / write	1
13	RF_ScanFlags	Scan settings of the module	See description	0	read / write	1
14	RF_BeaconFlags	Beacon settings of the module	See description	0	read / write	1
15	FS_DeviceInfo	Information about the chip	-	-	read	12
16	FS_SerialNumber	Serial number of the module	-	-	read	3
17	RF_TXPower	Output power [dBm] Two's complement	See description	4	read / write	1
18	RF_StaticPasskey	6 digit pass key	See description	"123123"	read / write	6
19	DIS_Flags	Flags for the DIS	0 - 255	0	read / write	1
20	DIS_ManufacturerName	Manufacturer name field of the DIS	See description	"Default"	read / write	1-64
21	DIS_ModelNumber	Model number field of the DIS	See description	"Default"	read / write	1-64
22	DIS_SerialNumber	Serial number field of the DIS	See description	"Default"	read / write	1-64
23	DIS_HWVersion	HW version field of the DIS	See description	"Default"	read / write	1-16

24	DIS_SWVersion	SW version field of the DIS	See description	"Default"	read / write	1-16
25	RF_Appearance	Appearance	0-65535	0	read / write	2
26	RF_SPPBaseUUID	Base UUID of the WE SPP-like profile	See description	See description	read / write	16
27	UART_Flags	UART Flags	0,1	0	read / write	1
28	CFG_Flags	CFG Flags	See description	0	read / write	2
29	RF_AdvertisingFlags	Advertising Flags	0,1	0	read / write	1
44	RF_SecFlagsPerOnly	Security settings of the module (peripheral only mode only)	See description	11	read / write	1

Table 52: Table of settings

9. Timing parameters

9.1. Reset and sleep

After power-up, resetting the module or waking the module from sleep a `CMD_GETSTATE_CNF` is sent to the serial interface as soon as the module is ready for operation.

Description	Typ.	Unit
Ready after reset/sleep	4	ms

9.2. Bluetooth LE timing parameters

The timing parameters for sending advertising packets or scanning are determined by the user settings `RF_ScanTiming`, `RF_ScanFactor` and `RF_AdvertisingTimeout`. Using these settings, the advertising interval, the advertising timeout, the scan interval and the scan window can be configured. Furthermore, the user setting `RF_ConnectionTiming` allows to configure the timing parameters used during connection setup and connection retention, as well as the connection interval and the connection supervision timeout.

9.3. Connection establishment

The time needed to establish a connection sums up as the time needed to detect the selected peripheral on air and the time needed for connection parameter negotiation and service discovery.

1. Peripheral detection To establish a connection, the initiating device (central) waits for an advertising packet, which was sent by the peripheral to which it wants to connect to. As soon as such an advertising packet has been received, the central sends a connection request to the chosen peripheral. The time needed to receive this advertising packet strongly depends on the advertising interval of the peripheral as well as on the scan interval and scan window of the central (see `RF_ScanTiming`).
2. Connection parameter negotiation After the connection request has been sent the central and peripheral negotiate the timing and security parameters of the connection. To finish this procedure and discover the services of the peripheral several messages have to be sent, whereby only one is sent per connection interval (see `RF_ConnectionTiming`).

Connection type	Estimated number of exchanged messages	Negotiation time for a connection interval of 50 ms
Unsecured connection	12-14	600-700 ms
Secured connection using the pairing method	22-24	1100-1200 ms
Secured connection to already bonded device	19-20	950-1000 ms

Knowing the connection interval and the number of messages that will be sent, the time necessary to setup a connection can be estimated by multiplying the number of messages with the connection interval.



In case the Device Information Service is enabled, the number of messages and thus the timing of the connection setup may be increased.

9.4. Connection based data transmission

After setting up a connection, data can be transmitted using the `CMD_DATA_REQ`. It buffers the data in the module and sends it with the next connection interval event. As soon as the data has been transmitted successfully, a `CMD_TXCOMPLETE_RSP` is returned by the UART. The time needed for this coincides with the connection interval that was negotiated during connection setup. The `RF_ConnectionTiming` parameter defines the minimum and maximum connection interval, which is supported by the module.

10. Peripheral only mode

The Proteus-II implements a new feature that allows the easy integration of the Proteus-II Bluetooth® LE module to an already existing host. The peripheral only mode offers a plug and play installation without previous configuration of the Proteus-II. It is tailored for easy communication with mobile Bluetooth® LE devices like smart phones.

The peripheral only mode is a special operation mode, that uses the user settings and the peripheral functions of the normal mode described in the previous chapters. It has to be enabled during the module start-up and contains the following key features:

- **Peripheral only functions:** The Proteus-II only contains the functions of a peripheral. Thus, it is advertising until another Bluetooth® LE device connects to it. In this case, the UART of the Proteus-II is enabled, the *LED_2* pin shows that the channel is open and bidirectional data transmission can start. As soon as the connection is closed, the UART is disabled again to save power. Since all central functions are no longer valid, the module cannot initiate any connection or run scans.
- **Transparent UART interface:** The serial interface of the Proteus-II is no longer driven by commands. This means, when the UART of the module is enabled (i.e. only when a channel is open, indicated by both LEDs active), data sent to the UART is transmitted by the Proteus-II to the connected Bluetooth® LE device. On the other hand, all data received by RF is sent from the Proteus-II to the connected host without additional header Bytes. The UART is only running, when a channel is open. Thus, power is saved during the advertising period. Depending on the configured connection interval, only one packet per interval is allowed to be transmitted. Since the commands of the command interface are no longer valid, a Proteus-II cannot be configured when running in peripheral only mode.
- **Pairing:** The default security mode is the static passkey pairing method (see *RF_SecFlagsPerOnly*), with the default key "123123". The bonding feature is enabled by default.

10.1. Reasons to use the peripheral only mode

The Proteus-II peripheral only mode equips custom applications with a Bluetooth® LE interface (to be accessible by other Bluetooth® LE devices) without installation effort.

To setup a connection to the Proteus-II in peripheral only mode the central device has to insert the Proteus-II's static passkey. As soon as the channel to a connected Bluetooth® LE central device is open, the *LED_2* pin switches on to signalize that data can be exchanged now. When the connection was shut down by the Bluetooth® LE central device, the *LED_2* pin switches off again.

Due to the transparent UART interface, data can be exchanged without additional headers. Furthermore, the peripheral only mode allows an energy efficient operation of the Bluetooth® LE interface, since the UART is only enabled when it is really used.

10.2. How to use the peripheral only mode

The peripheral only mode is enabled, when a high signal is present on the *OP_MODE* pin during device start-up or reset.

No configuration of the module is needed for this operating mode. The module shall be set to factory settings if reconfigured before so it uses the default user settings. In this case, the UART uses 115200 Baud 8n1 and static passkey pairing is used as authentication method.

If a configuration of the module is still needed (e.g. when another UART baud rate needs to be chosen), the module has to be started in normal mode and the `CMD_SET_REQ` may be used to update the user settings.

It is permitted to modify any user setting to change the behaviour of the peripheral only mode. Nevertheless, we recommend to update only the following parameters to run the device in factory state with minimal adaptations:

- `UART_BaudrateIndex` (change the UART baud rate, default value "115200")
- `UART_Flags` (enable or disable the flow control)
- `RF_StaticPasskey` (change the default static passkey, default value "123123")
- `RF_AdvertisingFlags` and `RF_DeviceName` (determine the content of the advertising packet)

10.3. More information

10.3.1. Radio

In factory state the following holds:

- In peripheral only mode a new 8-digit device name is automatically generated by the `FS_BTMAC`. In case of the `FS_BTMAC` equals 0x0018DA123456 the device name is "A-123456". This is a workaround for iOS, which does not allow access to the BTMAC for received Bluetooth® frames.
- The content of the advertising packet was changed in peripheral only mode. The TX power information block was removed, as the device name was extended to 8 digits.

See also the user setting `RF_AdvertisingFlags` to adapt the content of the advertising packet.

10.3.2. UART

- The data sent to the UART is buffered in the Proteus-II up to a maximum payload of 1015 Bytes. When no new Byte was received for 20 ms, the data will be transmitted via radio to the connected Bluetooth® LE device. If the data is larger than the MTU of the connection, the data is sent via radio in several fragments, with one fragment per connection interval.
- To enable a fast transmission of data packets a large MTU of the Bluetooth® LE connection is helpful. The Proteus-II supports up to 243 Bytes Bluetooth® LE packet payload (corresponding to a MTU of 247 Bytes), which may be negotiated by the central device (using a MTU request). If no MTU request is requested by the connecting central device the value of 19 Bytes payload per Bluetooth® LE packet and connection interval as given by the Bluetooth® 4.0 standard is used (compatibility mode to Bluetooth® LE 4.0 devices).

- The pin *BUSY* can be used as a kind of flow control for the data transmission during the peripheral only mode. By default the pin level is LOW. As soon as the 20 ms time-out was detected or too much data was received via UART, the pin switches to HIGH and data transmission starts via Bluetooth® LE. The pin switches LOW again, as soon as Bluetooth® LE data transmission has finished. Then new data can be send from the host to the radio module again. In case the pin is HIGH, no more data is accepted on the UART.

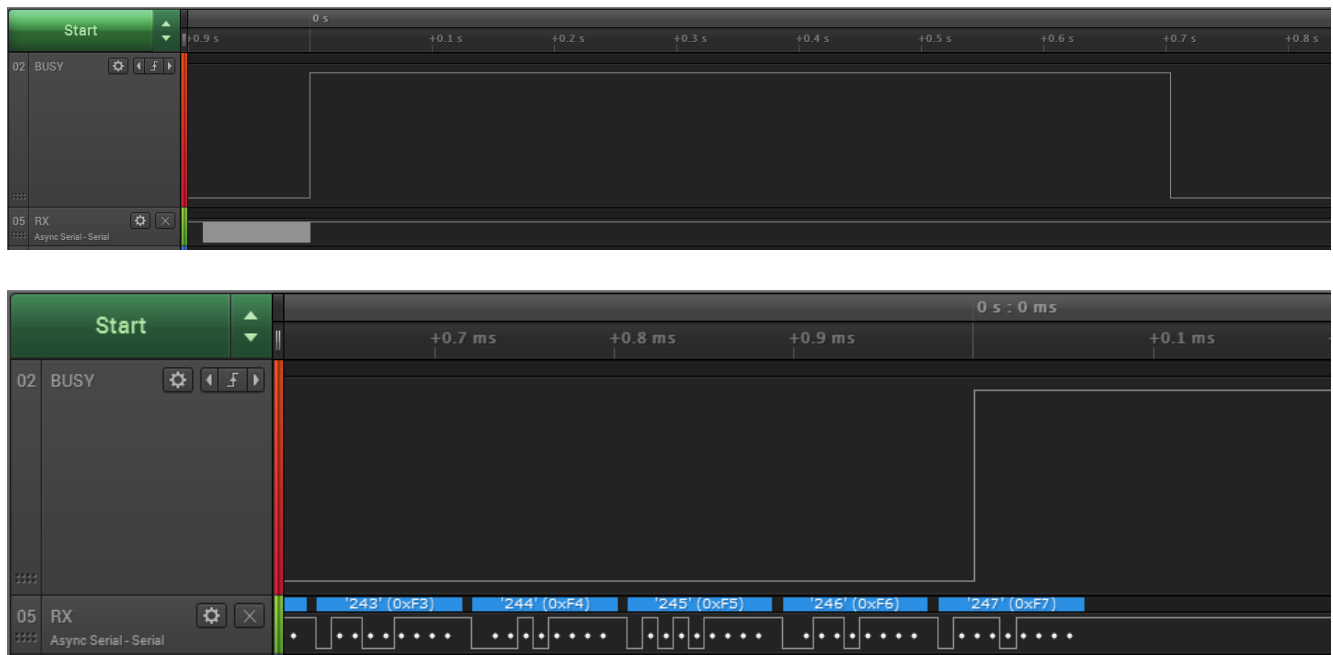


Figure 9: Switch of the *BUSY* pin when transmitting data

11. Customizing the Proteus-II

11.1. DIS - Device information service

Besides the WE SPP-like profile for data transmission, the Proteus-II contains the so called Device Information Service. This profile exposes manufacturer information about a device and is used to personalize the Proteus-II to fuse with the custom product. The Device Information Service is a standard Bluetooth® LE profile that is recognized by all devices with Bluetooth® capabilities. It contains the following fields, that can only be modified by updating the respective user setting using the `CMD_SET_REQ` command:

Field name	User setting	Maximum length
Manufacturer Name String	DIS_ManufacturerName	64
Model Number String	DIS_ModelNumber	64
Serial Number String	DIS_SerialNumber	64
Hardware Revision String	DIS_HWVersion	16
Software Revision String	DIS_SWVersion	16

Furthermore, the user setting `DIS_Flags` defines which of the described DIS fields are finally placed in the DIS profile. Thus after adding content to the a DIS field user setting, like `DIS_ManufacturerName`, the user setting `DIS_Flags` has to be adapted such that the content is added to the profile.

11.2. UUID

The UUID is a unique number identifying a Bluetooth® LE profile and thus describing its functions. The Proteus-II using its standard UUID is compatible to all devices that implement the WE SPP-like profile, whichever device it is integrated. To suspend this interoperability, the user setting `RF_SPPBaseUUID` can be used to modify the UUID of the WE SPP-like profile. With this, a new custom SPP-like profile is defined that is solely known to those that chose the new UUID. To generate a custom UUID the Bluetooth® SIG recommends to use the tool:

<http://www.uuidgenerator.net/>

11.3. Appearance

The appearance of the Bluetooth® device is a 2 Bytes value defined by the Bluetooth® SIG. It can be configured by adapting the parameter `RF_Appearance`.

12. Custom firmware

12.1. Custom configuration of standard firmware

The configuration of the standard firmware includes adoption of the non-volatile user settings (see chapter 8) to customer requirements and creating a customized product based on the standard product.

This variant will result in a customer exclusive module with a unique ordering number. It will also freeze the firmware version to a specific and customer tested version and thus results in a customer exclusive module with a unique ordering number.

Further scheduled firmware updates of the standard firmware will not be applied to this variant automatically. Applying updates or further functions require a customer request and release procedure.

12.2. Customer specific firmware

A customer specific firmware may include "Custom configuration of standard firmware" plus additional options or functions and tasks that are customer specific and not part of the standard firmware.

Further scheduled firmware updates of the standard firmware will not be applied to this variant automatically. Applying updates or further functions require a customer request and release procedure.

This also results in a customer exclusive module with a unique ordering number.

An example for this level of customization are functions like host-less operation where the module will perform data generation (e.g. by reading a SPI or I²C sensor) and cyclic transmission of this data to a data collector, while sleeping or being passive most of the time.

Also replacing UART with SPI as host communication interface is classified such a custom specific option.

Certification critical changes need to be re-evaluated by an external qualified measurement laboratory. These critical changes may occur when e.g. changing radio parameters, the channel access method, the duty-cycle or in case of various other functions and options possibly used or changed by a customer specific firmware.

12.3. Customer firmware

A customer firmware is a firmware written and tested by the customer himself or a 3rd party as a customer representative specifically for the hardware platform provided by a module.

This customer firmware (e.g. in form of a Intel hex file) will be implemented into the module's production process at our production site.

This also results in a customer exclusive module with a unique ordering number.

The additional information needed for this type of customer firmware, such as hardware specific details and details towards the development of such firmware are not available for the public and can only be made available to qualified customers.



The qualification(s) and certification(s) of the standard firmware cannot be applied to this customer firmware solution without a review and verification.

12.4. Contact for firmware requests

Please contact your Business Development Engineer (BDM) or WCS@we-online.com for quotes regarding these topics.

13. Firmware update

The Proteus-II offers two possibilities of updating its firmware.

13.1. Firmware flashing using the SWD interface

The SWD is a production interface and performing an update it will erase any pre-installed firmware and calibration values of the Proteus-II.



Any certification, declaration and qualification that has requirements in a combination of hard- and firmware is invalidated by this action.

13.2. Firmware update using the Proteus-II OTA bootloader

This method offers a possibility to update the firmware over the air (OTA). Therefore, the Nordic nRF52 Bluetooth® LE DFU Secure Bootloader is integrated into the Proteus-II's firmware, which will communicate over the Bluetooth® LE interface. The OTA bootloader mode is a distinct operating mode besides the normal operating modes mentioned before. For this reason, a .zip-file can be provided, which contains all (bootloader, Softdevice, application) parts of the firmware in an encrypted and authenticated package.

Before starting any update procedure, please check whether the installed firmware can be updated to a new one:

Version of the firmware before the update	Version of the new firmware	App
1.x.x	1.x.x	nRF Device Firmware Update [6, 7]

Table 53: Compatibility matrix

To start the bootloader, one of the following two conditions has to be satisfied:

1. Send the command `CMD_BOOTLOADER_REQ` to the module to restart in bootloader. mode
2. During a reset and while restarting, a low signal has to be present on the *BOOT* pin of the module to start it in bootloader mode. To do this on the Proteus-II EV-Board, put a jumper on JP3(1,2) and JP2(1,2) to apply GND to the *BOOT* before resetting the module via pressing the */RESET* button.

The bootloader mode has started successfully if *LED_1* has turned on. After the bootloader has started successfully, the module goes into the advertising mode using the name "DFUxxx".



iOS devices may not show the live device name "DFUxxx" that is placed in the radio packets due to internal look-up table use. It will only update the device name after a connection was successfully established. Vice versa, when re-booting the device after using the FOTA mode, iOS will still show "DFUxxx" as device name until a connection has been setup to the module again.

Now, any Bluetooth® LE device hosting an application that understands the commands of the Nordic nRF52 Bluetooth® LE DFU Bootloader can connect in order to update the Proteus-II firmware.

The DFU application of the used App (see Table 53) is such an application. For more details, please refer to chapter 13.2.1. As soon as a connection has been set up, *LED_1* turns off again and *LED_2* turns on.




The implemented Nordic nRF52 Bluetooth® LE DFU bootloader uses a dual bank method to update the firmware. Thus, the old firmware is only replaced once the new firmware has been transferred and authenticated successfully. This prevents the module from being flashed with a faulty firmware.



An OTA firmware update will take several minutes to be performed, the duration is also dependent how much of the firmware shall be updated (application only or complete update).

13.2.1. Firmware update steps using the nRF Device Firmware Update app


If the radio module Proteus-II has been set to bootloader mode, the nRF Device Firmware Update app [6, 7]  can be used to perform the OTA firmware update.

- Open the app, press "Select" to choose the file. The file explorer opens where you can select the zip file that contains the FOTA image.
- Then press "Select" to choose the device to update. The app scans for available Bluetooth® LE devices. The Proteus-II in bootloader mode appears as "DFUxxxx" in the scan list. Select that.




If there is no device named "DFUxxxx" on the radio, please check whether the module has been started in bootloader mode.


- Then press "Start" to start the update process.
- Wait until it has finished.

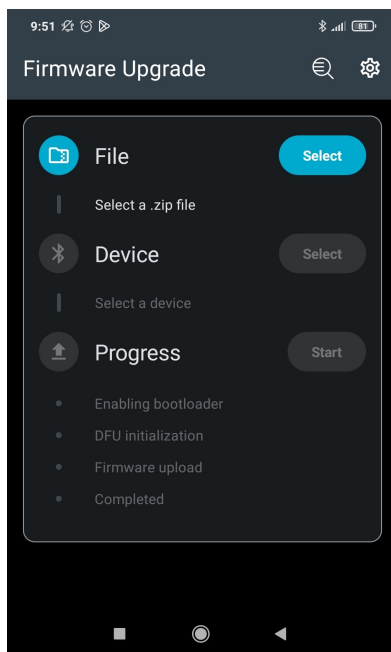

a) Select file

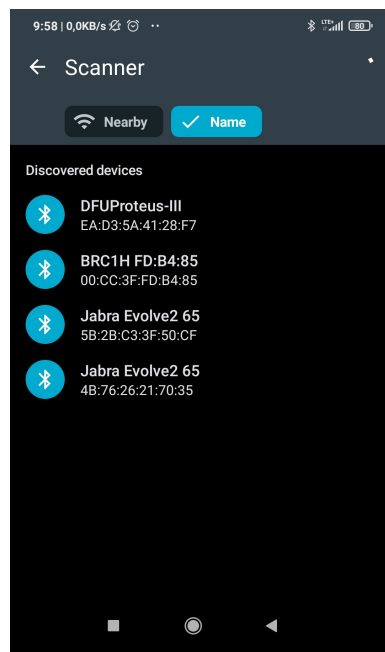

b) Scan list

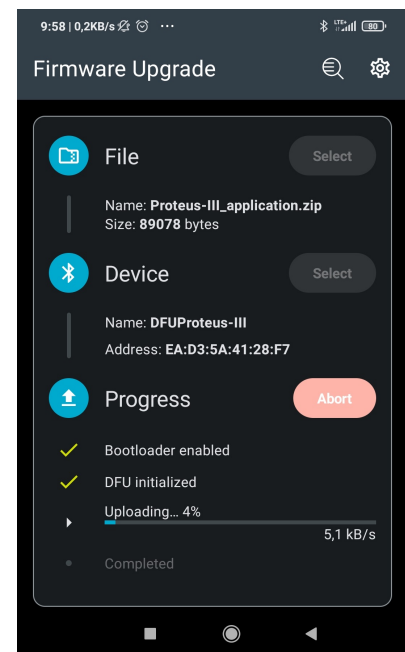

c) FOTA running

Figure 10: nRF Device Firmware Update app

14. Firmware history

Version 0.x.x "Engineering"

- Pre-release for test run

Version 1.1.0 "Release"

- First production release

Version 1.3.0 "Release"

- Updated the user setting `RF_ConnectionTiming`. The new values better support most recent Android and iOS devices.
- Updated the user setting `CFG_Flags`. A new option has been added that defines whether the Proteus-II closes the Bluetooth® LE connection in case the connected central (i.e. smart phone) does not respect the configured connection interval settings (see `RF_ConnectionTiming`).
- Introduced new user setting `RF_AdvertisingFlags` to determine the content of the advertising packet. This allows to use the `RF_DeviceName` also in the advertising packet in peripheral only mode.
- Improved UART behaviour in Peripheral only Mode (see section 10.3.2). A new pin function has been added. The new `BUSY` pin indicates when module is busy with data transmission.

14.1. Known issues

Index	Details	Affected versions
KI-001	<p>Description: Using 32 byte <code>RF_DeviceName</code> will result in a malfunctioning device.</p> <p>Affected functions: User setting <code>RF_DeviceName</code> and command <code>CMD_SET_REQ</code>.</p> <p>Workaround: Use a <code>RF_DeviceName</code> of maximum 31 characters. The device can be recovered by a FOTA (firmware over the air) update.</p>	$\leq 1.3.0$
KI-002	<p>Description: The output power value <code>RF_TXPower</code> equals -30 dBm is invalid. The module will not start-up again.</p> <p>Affected functions: User setting <code>RF_TXPower</code> and command <code>CMD_SET_REQ</code>.</p> <p>Workaround: Do not use <code>CMD_SET_REQ</code> function to set the user setting <code>RF_TXPower</code> to -30 dBm. The device can be recovered by a FOTA (firmware over the air) update.</p>	$\leq 1.3.0$

KI-003	<p>Description: Setting the Bluetooth® reserved UUID 0000xxxx-0000-1000-8000-00805f9b34fb as base UUID will result in malfunctioning. The module will not start-up again.</p> <p>Affected functions: User setting RF_SPPBaseUUID and command CMD_SET_REQ.</p> <p>Workaround: Do not use CMD_SET_REQ function to set the user setting RF_SPPBaseUUID to the value 0000xxxx-0000-1000-8000-00805f9b34fb. The device can be recovered by a FOTA (firmware over the air) update.</p>	≤ 1.3.0
--------	---	---------

15. Design in guide

15.1. Advice for schematic and layout

For users with less RF experience it is advisable to closely copy the relating EV-Board with respect to schematic and layout, as it is a proven design. The layout should be conducted with particular care, because even small deficiencies could affect the radio performance and its range or even the conformity.

The following general advice should be taken into consideration:

- A clean, stable power supply is strongly recommended. Interference, especially oscillation can severely restrain range and conformity.
- Variations in voltage level should be avoided.
- LDOs, properly designed in, usually deliver a proper regulated voltage.
- Blocking capacitors and a ferrite bead in the power supply line can be included to filter and smoothen the supply voltage when necessary.



No fixed values can be recommended, as these depend on the circumstances of the application (main power source, interferences etc.).



The use of an external reset IC should be considered if one of the following points is relevant:



- The slew rate of the power supply exceeds the electrical specifications.
- The effect of different current consumptions on the voltage level of batteries or voltage regulators should be considered. The module draws higher currents in certain scenarios like start-up or radio transmit which may lead to a voltage drop on the supply. A restart under such circumstances should be prevented by ensuring that the supply voltage does not drop below the minimum specifications.
- Voltage levels below the minimum recommended voltage level may lead to malfunction. The reset pin of the module shall be held on LOW logic level whenever the VDD is not stable or below the minimum operating Voltage.
- Special care must be taken in case of battery powered systems.

- Elements for ESD protection should be placed on all pins that are accessible from the outside and should be placed close to the accessible area. For example, the RF-pin is accessible when using an external antenna and should be protected.
- ESD protection for the antenna connection must be chosen such as to have a minimum effect on the RF signal. For example, a protection diode with low capacitance such as the 8231606A or a 68 nH air-core coil connecting the RF-line to ground give good results.
- Placeholders for optional antenna matching or additional filtering are recommended.
- The antenna path should be kept as short as possible.



Again, no fixed values can be recommended, as they depend on the influencing circumstances of the application (antenna, interferences etc.).

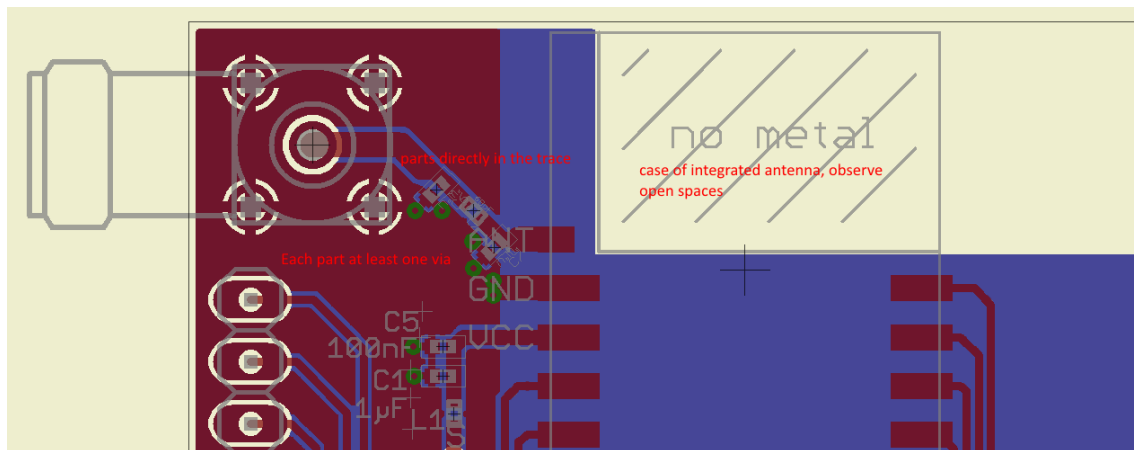


Figure 11: Layout

- To avoid the risk of short circuits and interference there should be no routing underneath the module on the top layer of the baseboard.
- On the second layer, a ground plane is recommended, to provide good grounding and shielding to any following layers and application environment.
- In case of integrated antennas it is required to have areas free from ground. This area should be copied from the EV-Board.
- The area with the integrated antenna must overlap with the carrier board and should not protrude, as it is matched to sitting directly on top of a PCB.
- Modules with integrated antennas should be placed with the antenna at the edge of the main board. It should not be placed in the middle of the main board or far away from the edge. This is to avoid tracks beside the antenna.

- Filter and blocking capacitors should be placed directly in the tracks without stubs, to achieve the best effect.
- Antenna matching elements should be placed close to the antenna / connector, blocking capacitors close to the module.
- Ground connections for the module and the capacitors should be kept as short as possible and with at least one separate through hole connection to the ground layer.
- ESD protection elements should be placed as close as possible to the exposed areas.

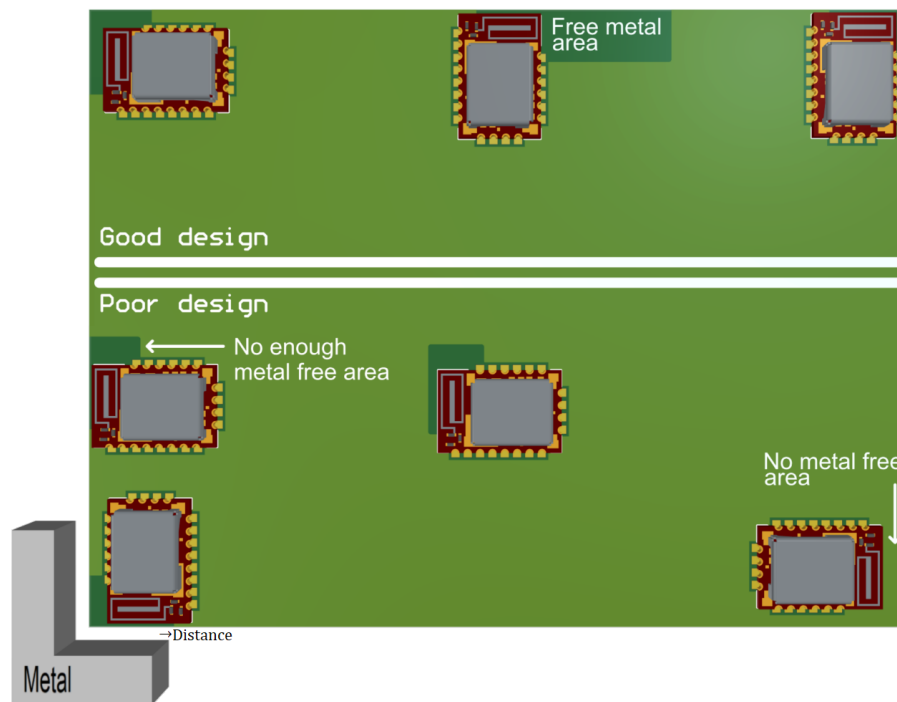


Figure 12: Placement of the module with integrated antenna

15.2. Designing the antenna connection

The antenna should be connected with a $50\ \Omega$ line. This is needed to obtain impedance matching to the module and avoids reflections. Here we show as an example how to calculate the dimensions of a $50\ \Omega$ line in form of a micro strip above ground, as this is easiest to calculate. Other connections like coplanar or strip line are more complicated to calculate but can offer more robustness to EMC. There are free calculation tools available in the internet.

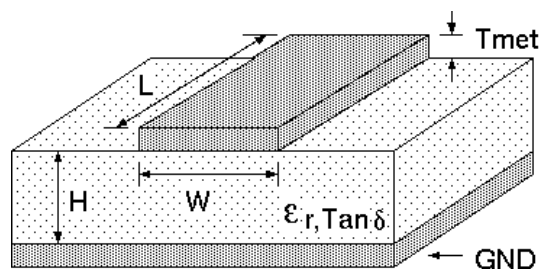


Figure 13: Dimensioning the antenna connection as micro strip

The width W for a micro strip can be calculated using the following equation:

$$W = 1.25 \times \left(\frac{5.98 \times H}{e^{\frac{50 \times \sqrt{\epsilon_r + 1.41}}{87}}} - T_{met} \right) \quad (1)$$

Example:

A FR4 material with $\epsilon_r = 4.3$, a height $H = 1000 \mu\text{m}$ and a copper thickness of $T_{met} = 18 \mu\text{m}$ will lead to a trace width of $W \sim 1.9 \text{ mm}$. To ease the calculation of the micro strip line (or e.g. a coplanar) many calculators can be found in the internet.

- As rule of thumb a distance of about $3 \times W$ should be observed between the micro strip and other traces / ground.
- The micro strip refers to ground, therefore there has to be the ground plane underneath the trace.
- Keep the feeding line as short as possible.

15.3. Antenna solutions

There exist several kinds of antennas, which are optimized for different needs. Chip antennas are optimized for minimal size requirements but at the expense of range, PCB antennas are optimized for minimal costs, and are generally a compromise between size and range. Both usually fit inside a housing.

Range optimization in general is at the expense of space. Antennas that are bigger in size, so that they would probably not fit in a small housing, are usually equipped with a RF connector. A benefit of this connector may be to use it to lead the RF signal through a metal plate (e.g. metal housing, cabinet).

As a rule of thumb a minimum distance of $\lambda / 10$ (which is 3.5 cm @ 868 MHz and 1.2 cm @ 2.44 GHz) from the antenna to any other metal should be kept. Metal placed further away will not directly influence the behavior of the antenna, but will anyway produce shadowing.



Keep the antenna as far as possible from large metal objects to avoid electro-magnetic field blocking.

In the following chapters, some special types of antenna are described.

15.3.1. Wire antenna

An effective antenna is a $\lambda/4$ radiator with a suiting ground plane. The simplest realization is a piece of wire. It's length is depending on the used radio frequency, so for example 8.6 cm 868.0 MHz and 3.1 cm for 2.440 GHz as frequency. This radiator needs a ground plane at its feeding point. Ideally, it is placed vertically in the middle of the ground plane. As this is often not possible because of space requirements, a suitable compromise is to bend the wire away from the PCB respective to the ground plane. The $\lambda/4$ radiator has approximately 40 Ω input impedance. Therefore, matching is not required.

15.3.2. Chip antenna

There are many chip antennas from various manufacturers. The benefit of a chip antenna is obviously the minimal space required and reasonable costs. However, this is often at the expense of range. For the chip antennas, reference designs should be followed as closely as possible, because only in this constellation can the stated performance be achieved.

15.3.3. PCB antenna

PCB antenna designs can be very different. The special attention can be on the miniaturization or on the performance. The benefits of the PCB antenna are their small / not existing (if PCB space is available) costs, however the EV of a PCB antenna holds more risk of failure than the use of a finished antenna. Most PCB antenna designs are a compromise of range and space between chip antennas and connector antennas.

15.3.4. Antennas provided by Würth Elektronik eiSos

15.3.4.1. 2600130021 - Himalia dipole antenna



Figure 14: Himalia dipole antenna

Due to the fact that the antenna has dipole topology, there is no need for an additional ground plane. Nevertheless, the specification was measured edge mounted and 90 ° bent on a 100 x 100 mm ground plane.

Specification	Value
Frequency range [GHz]	2.4 – 2.5
Impedance [Ω]	50
VSWR	$\leq 2:1$
Polarization	Linear
Radiation	Omni-Directional
Peak Gain [dBi]	2.8
Average Gain [dBi]	-0.6
Efficiency	85 %
Dimensions (L x d) [mm]	83.1 x 10
Weight [g]	7.4
Connector	SMA plug
Operating temp. [$^{\circ}\text{C}$]	-40 – +80

Special care must be taken for FCC certification when using this external antenna to fulfill the requirement of permanently attached antenna or unique coupling, for example by using the certified dipole antenna in a closed housing, so that it is possible to remove it only through professional installation.

16. Reference design

Proteus-II was tested and certified on the corresponding Proteus-II EV-Board. For the compliance with the EU directive 2014/53/EU Annex I, the EV-Board serves as reference design. This is no discrepancy due to the fact that the EV-Board itself does not fall within the scope of the EU directive 2014/53/EU Annex I as the module is tested on the EV-Board, which is also the recommended use.

Further information concerning the use of the EV-Board can be found in the manual of the Proteus-II EV-Board.

16.2. Layout

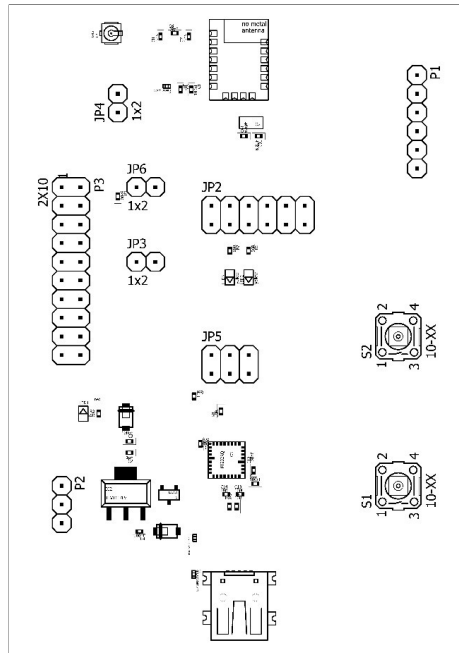


Figure 16: Assembly diagram

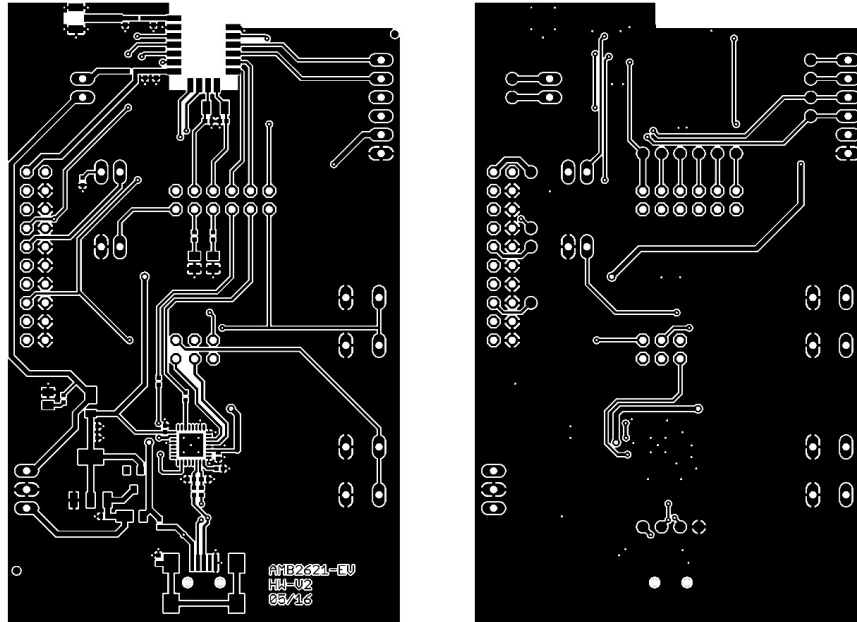


Figure 17: Top & bottom Layer

16.3. Internal antenna radiation characteristics

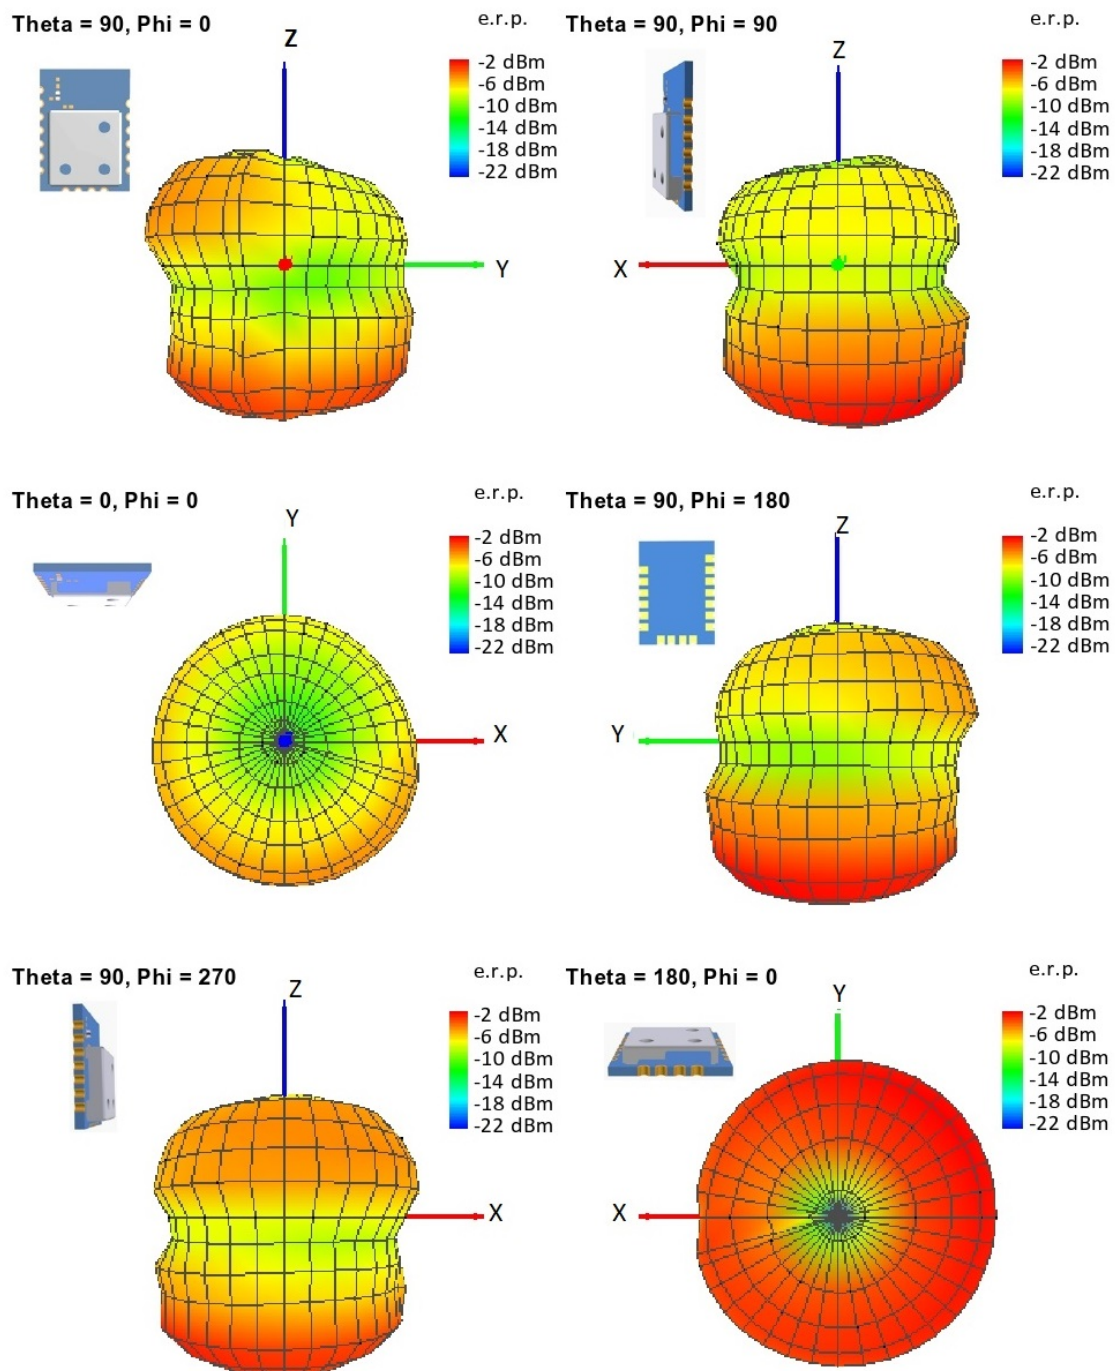


Figure 18: Antenna characteristic from integrated antenna measured on official EV-Board*

¹Radiation characteristic shown is valid for the module on the EV-Board. It is important to be aware that size of groundplane and placement of module has influence on the radiation pattern.

17. Manufacturing information

17.1. Moisture sensitivity level

This wireless connectivity product is categorized as JEDEC Moisture Sensitivity Level 3 (MSL3), which requires special handling.

More information regarding the MSL requirements can be found in the IPC/JEDEC J-STD-020 standard on www.jedec.org.

More information about the handling, picking, shipping and the usage of moisture/reflow and/or process sensitive products can be found in the IPC/JEDEC J-STD-033 standard on www.jedec.org.

17.2. Soldering

17.2.1. Reflow soldering

Attention must be paid on the thickness of the solder resist between the host PCB top side and the modules bottom side. Only lead-free assembly is recommended according to JEDEC J-STD020.

Profile feature		Value
Preheat temperature Min	$T_{S \text{ Min}}$	150 °C
Preheat temperature Max	$T_{S \text{ Max}}$	200 °C
Preheat time from $T_{S \text{ Min}}$ to $T_{S \text{ Max}}$	t_S	60 - 120 seconds
Ramp-up rate (T_L to T_P)		3 °C / second max.
Liquidous temperature	T_L	217 °C
Time t_L maintained above T_L	t_L	60 - 150 seconds
Peak package body temperature	T_P	260 °C
Time within 5 °C of actual peak temperature	t_P	20 - 30 seconds
Ramp-down Rate (T_P to T_L)		6 °C / second max.
Time 20 °C to T_P		8 minutes max.

Table 55: Classification reflow soldering profile, Note: refer to IPC/JEDEC J-STD-020E

It is recommended to solder this module on the last reflow cycle of the PCB. For solder paste use a LFM-48W or Indium based SAC 305 alloy (Sn 96.5 / Ag 3.0 / Cu 0.5 / Indium 8.9HF / Type 3 / 89%) type 3 or higher.

The reflow profile must be adjusted based on the thermal mass of the entire populated PCB, heat transfer efficiency of the reflow oven and the specific type of solder paste used. Based on the specific process and PCB layout the optimal soldering profile must be adjusted and verified. Other soldering methods (e.g. vapor phase) have not been verified and have to be validated

by the customer at their own risk. Rework is not recommended.

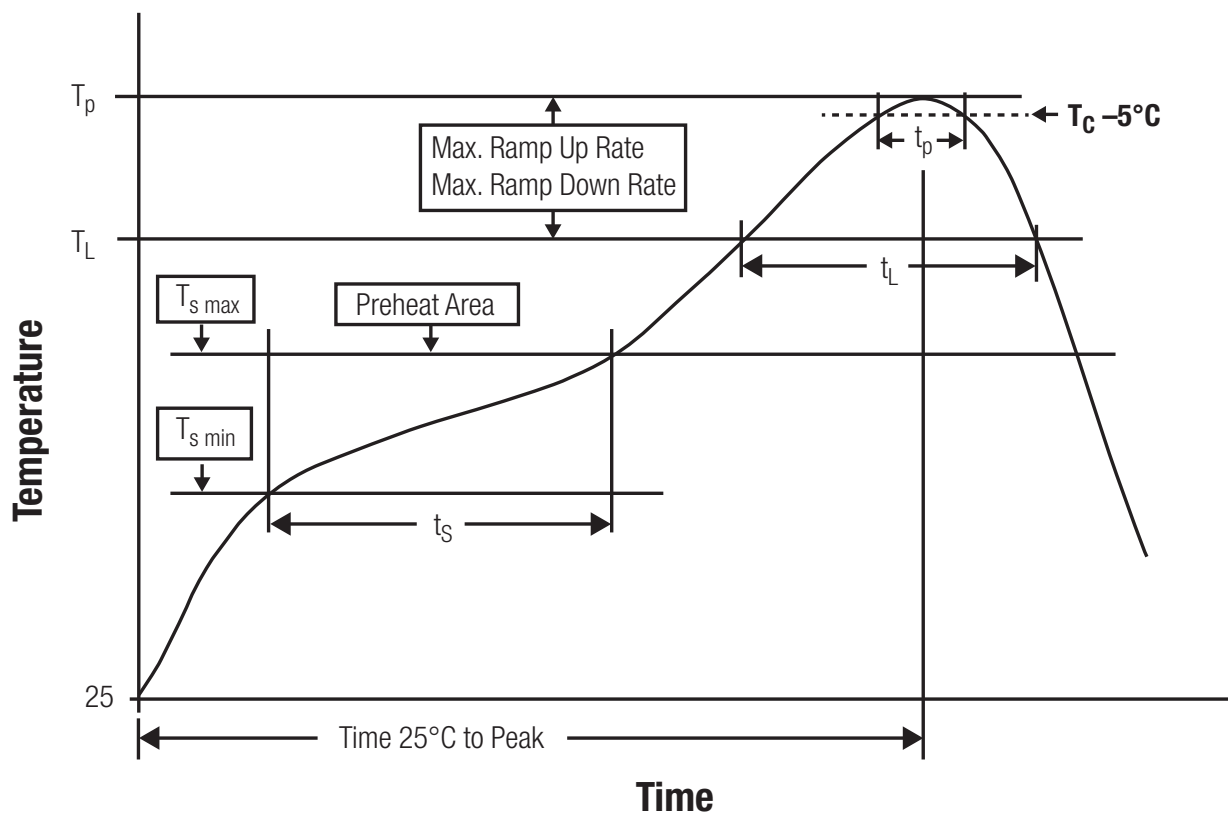


Figure 19: Reflow soldering profile

After reflow soldering, visually inspect the board to confirm proper alignment

17.2.2. Cleaning

Do not clean the product. Any residue cannot be easily removed by washing. Use a "no clean" soldering paste and do not clean the board after soldering.

- Do not clean the product with water. Capillary effects can draw water into the gap between the host PCB and the module, absorbing water underneath it. If water is trapped inside, it may short-circuit adjoining pads. The water may also destroy the label and ink-jet printed text on it.
- Cleaning processes using alcohol or other organic solvents may draw solder flux residues into the housing, which won't be detected in a post-wash inspection. The solvent may also destroy the label and ink-jet printed text on it.
- Do not use ultrasonic cleaning as it will permanently damage the part, particularly the crystal oscillators.

17.2.3. Potting and coating

- If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking could lead to an incomplete seal, allowing contaminants into the component. Expansion could damage components. We recommend a manual inspection after potting to avoid these effects.
- Conformal coating or potting results in loss of warranty.
- The RF shield will not protect the part from low-viscosity coatings and potting. An undefined amount of coating and potting will enter inside the shielding.
- Conformal coating and potting will influence the parts of the radio front end and consequently influence the radio performance.
- Potting will influence the temperature behaviour of the device. This might be critical for components with high power.

17.2.4. Other notations

- Do not attempt to improve the grounding by forming metal strips directly to the EMI covers or soldering on ground cables, as it may damage the part and will void the warranty.
- Always solder every pad to the host PCB even if some are unused, to improve the mechanical strength of the module.
- The part is sensitive to ultrasonic waves, as such do not use ultrasonic cleaning, welding or other processing. Any ultrasonic processing will void the warranty.

17.3. ESD handling

This product is highly sensitive to electrostatic discharge (ESD). As such, always use proper ESD precautions when handling. Make sure to handle the part properly throughout all stages of production, including on the host PCB where the module is installed. For ESD ratings, refer to the module series' maximum ESD section. For more information, refer to the relevant chapter 2. Failing to follow the aforementioned recommendations can result in severe damage to the part.

- the first contact point when handling the PCB is always between the local GND and the host PCB GND, unless there is a galvanic coupling between the local GND (for example work table) and the host PCB GND.
- Before assembling an antenna patch, connect the grounds.
- While handling the RF pin, avoid contact with any charged capacitors and be careful when contacting any materials that can develop charges (for example coaxial cable with around 50-80 pF/m, patch antenna with around 10 pF, soldering iron etc.)
- Do not touch any exposed area of the antenna to avoid electrostatic discharge. Do not let the antenna area be touched in a non ESD-safe manner.
- When soldering, use an ESD-safe soldering iron.

17.4. Safety recommendations

It is your duty to ensure that the product is allowed to be used in the destination country and within the required environment. Usage of the product can be dangerous and must be tested and verified by the end user. Be especially careful of:

- Use in areas with risk of explosion (for example oil refineries, gas stations).
- Use in areas such as airports, aircraft, hospitals, etc., where the product may interfere with other electronic components.

It is the customer's responsibility to ensure compliance with all applicable legal, regulatory and safety-related requirements as well as applicable environmental regulations. Disassembling the product is not allowed. Evidence of tampering will void the warranty.

- Compliance with the instructions in the product manual is recommended for correct product set-up.
- The product must be provided with a consolidated voltage source. The wiring must meet all applicable fire and security prevention standards.
- Handle with care. Avoid touching the pins as there could be ESD damage.

Be careful when working with any external components. When in doubt consult the technical documentation and relevant standards. Always use an antenna with the proper characteristics.



Würth Elektronik eiSos radio modules with high output power of up to 500 mW generate a large amount of heat while transmitting. The manufacturer of the end device must take care of potentially necessary actions for his application.

18. Product testing

18.1. Würth Elektronik eiSos in-house production tests

To achieve a high quality standard, Würth Elektronik eiSos follows a philosophy of supplying fully tested radio modules. At the end of the production process, every unit undergoes an optical inspection. Here the quality of soldering, edge castellation and edge milling is monitored.

If this has been passed, the radio modules are handed over to the automatic test equipment for the electrical characterization. This includes:

- Voltage and current tests to ensure proper electrical performance
- RF characteristics (frequency, spectrum, TX power) measurement and calibration
- Radio communication tests
- Firmware and serial number programming
- Host interface communication tests

The automated testing process is logged for internal quality control. The gained measurement data of each unit is analysed to detect defective parts and investigate the corresponding root cause. Defective radio modules are discarded, in order to guarantee a 100% failure-free delivery to customers.

18.2. EMS production tests

The rigorous in-series production testing ensures that EMS don't need to duplicate firmware tests or measurements. This streamlines the process and eliminates the need for additional testing over analogue and digital interfaces during device production. When it comes to device testing, the ideal focus should be on module assembly quality:

- All module pins are soldered properly on the base PCB
- There are no short circuits
- The mounting process did not damage the module
- The communication between host and radio module is working
- The antenna is connected properly

Simple "Go/No go" tests, like checking the RSSI value, give already a hint if the power supply and antenna have been connected properly.

In addition to such standard testing procedures, radio module integrators have the flexibility to perform additional dedicated tests to thoroughly evaluate the device. Specific tests they can consider are:

- Measure module current consumption in a specified operating state. Deviations from expected results (compared to a "Golden Device") can signal potential issues.

- Perform functional tests, including communication checks with the host controller and verification of interfaces.
- Assess fundamental RF characteristics (modulation accuracy, power levels, spectrum). Verify that the device meets expected performance standards.

19. Physical specifications

19.1. Dimensions

Dimensions
11 x 8 x 2 mm

Table 56: Dimensions

19.2. Weight

Weight
< 1 g

Table 57: Weight

19.3. Module drawing

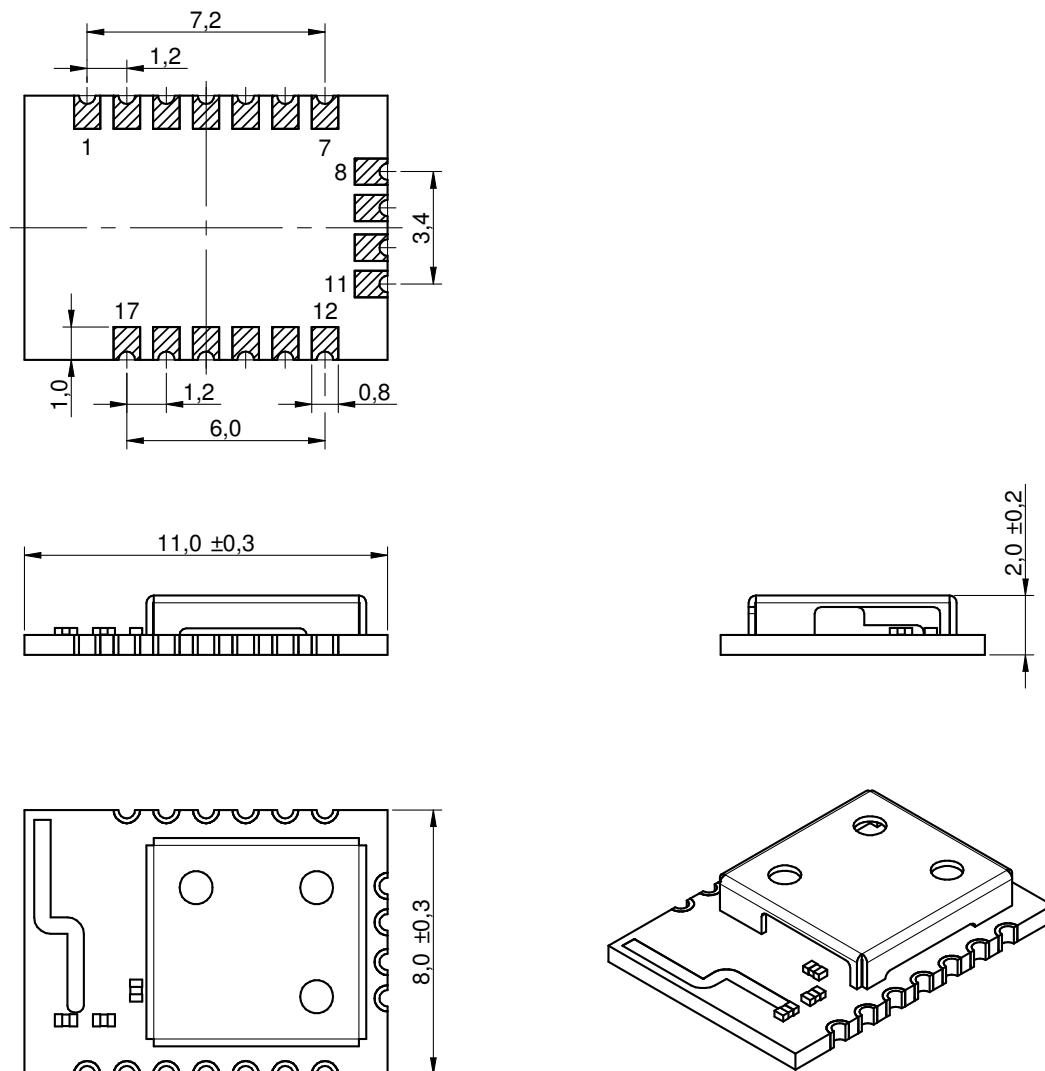


Figure 20: Module dimensions [mm]

19.4. Footprint WE-FP-4

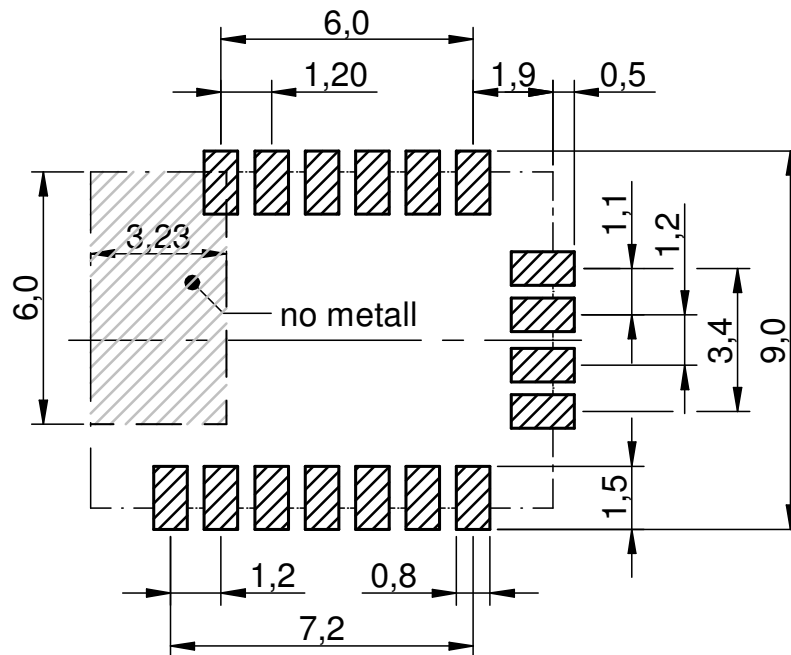


Figure 21: Footprint WE-FP-4 [mm]

19.5. Antenna free area

To avoid influence and mismatching of the antenna the recommended free area around the antenna should be maintained. As rule of thumb a minimum distance of metal parts to the antenna of $\lambda/10$ should be kept (see figure 21). Even though metal parts would influence the characteristic of the antenna, but the direct influence and matching keep an acceptable level.

20. Marking

20.1. Lot number

The 15 digit lot number is printed in numerical digits as well as in form of a machine readable bar code. It is divided into 5 blocks as shown in the following picture and can be translated according to the following table.

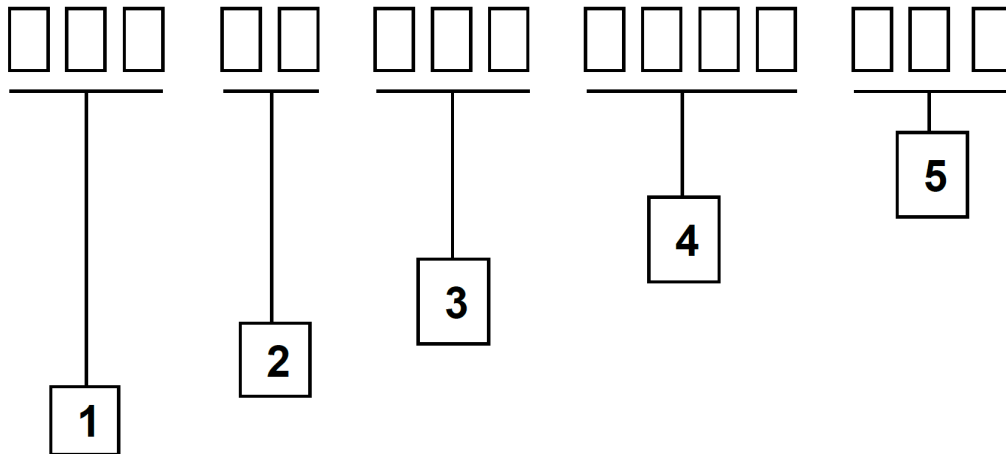


Figure 22: Lot number structure

Block	Information	Example(s)
1	eiSos internal, 3 digits	438
2	eiSos internal, 2 digits	01
3	Radio module hardware version, 3 digits	V2.4 = 024, V12.2 = 122
4	Date code, 4 digits	1703 = week 03 in year 2017, 1816 = week 16 in year 2018
5	Radio module firmware version, 3 digits	V3.2 = 302, V5.13 = 513

Table 58: Lot number details

As the user can perform a firmware update the printed lot number only shows the factory delivery state. The currently installed firmware can be requested from the module using the corresponding product specific command. The firmware version as well as the hardware version are restricted to show only major and minor version not the patch identifier.

20.2. General labeling information

Labels of Würth Elektronik eiSos radio modules include several fields. Besides the manufacturer identification, the product's *WE* order code, serial number and certification information are placed on the label. In case of small labels, additional certification marks are placed on the label of the reel.

The information on the label are fixed. Only the serial number changes with each entity of the radio module. For Proteus-II the label is as follows:

08011024010
ID: 2001AB
FCCID: C E
R7TAMB2623

Figure 23: Label of the Proteus-II

21. Information for explosion protection

In case the end product should be used in Explosion protection areas the following information can be used:

- The module itself is unfused.
- The maximum output power of the module is 5 dBm for external antenna and 0 dBm for internal antenna.
- The total amount of capacitance of all capacitors is 5.9 μF .
- The total amount of inductance of all inductors is 10.025 μH .
- A DC/DC regulator is included in the chipset and used to obtain low power functionality.

22. Bluetooth SIG listing/qualification

Type	Data
Design name	Proteus-II
Declaration ID	D041883
QDID	118943
Specification name	5.0
Project type	End product

Each product containing intellectual property of the Bluetooth® Special Interest Group (SIG) must be qualified by the SIG to obtain the corresponding Declaration ID.

Due to the qualification of the Proteus-II as end product no further Bluetooth® tests are required. The only arising expenses are those for purchasing a Bluetooth® Declaration ID.

To obtain the Bluetooth® listing of the end device, please refer to the application note ANR027 [8].

23. Regulatory compliance information

23.1. Important notice EU

The use of RF frequencies is limited by national regulations. The Proteus-II has been designed to comply with the RED directive 2014/53/EU of the European Union (EU).

The Proteus-II can be operated without notification and free of charge in the area of the European Union. However, according to the RED directive, restrictions (e.g. in terms of duty cycle or maximum allowed RF power) may apply.

23.2. Important notice UKCA

The UK's government has laid legislation to continue recognition of current EU requirements for a range of product regulations, including the CE marking. The Radio Equipment Regulation 2017/1206 is within the scope of this announcement, among others.

Consequently, the Proteus-II can be sold and utilized in the UK with the CE marking, without the need of UKCA declaration of conformity or UKCA marking.

Source: <https://www.gov.uk/guidance/ce-marking>

23.3. Important notice FCC

The use of RF frequencies is limited by national regulations. The Proteus-II has been designed to comply with the FCC Part 15.

The Proteus-II can be operated without notification and free of charge in the area of the United States of America. However, according to the FCC Part 15, restrictions (e.g. in terms of maximum allowed RF power and antenna) may apply.

23.4. Conformity assessment of the final product

The Proteus-II is a subassembly. It is designed to be embedded into other products (products incorporating the Proteus-II are henceforward referred to as "final products").

It is the responsibility of the manufacturer of the final product to ensure that the final product is in compliance with the essential requirements of the underlying national radio regulations.

The conformity assessment of the subassembly Proteus-II carried out by Würth Elektronik eiSos does not replace the required conformity assessment of the final product.

23.5. Exemption clause

Relevant regulation requirements are subject to change. Würth Elektronik eiSos does not guarantee the accuracy of the before mentioned information. Directives, technical standards, procedural descriptions and the like may be interpreted differently by the national authorities. Equally, the national laws and restrictions may vary with the country. In case of doubt or uncertainty, we recommend that you consult with the authorities or official certification organizations of the relevant countries. Würth Elektronik eiSos is exempt from any responsibilities or liabilities related to regulatory compliance.

Notwithstanding the above, Würth Elektronik eiSos makes no representations and warranties of any kind related to their accuracy, correctness, completeness and/or usability for customer applications. No responsibility is assumed for inaccuracies or incompleteness.

23.6. EU Declaration of conformity



EU DECLARATION OF CONFORMITY

Radio equipment: 2608011024010 & 2608011124010

The manufacturer: Würth Elektronik eiSos GmbH & Co. KG
Max-Eyth-Straße 1
74638 Waldenburg

This declaration of conformity is issued under the sole responsibility of the manufacturer.

Object of the declaration: 2608011024010 & 2608011124010

The object of the declaration described above is in conformity with the relevant Union harmonisation legislation Directive 2014/53/EU and 2011/65/EU with its amending Annex II EU 2015/863 . Following harmonised norms or technical specifications have been applied:

EN 300 328 V2.2.2 (2019-07)
EN 301 489-1 V2.2.3 (2019-11)
EN 301 489-17 V3.2.4 (2020-09)
EN 62479 : 2010
EN 62368-1:2014 + AC:2015

i.A. G. Exlerdt

Trier, 18th of December 2020

Place and date of issue

23.7. FCC Compliance Statement (US)

FCC ID: R7TAMB2623

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
 - (2) this device must accept any interference received, including interference that may cause undesired operation.
- (FCC 15.19)

Modifications (FCC 15.21)

Caution: Changes or modifications for this equipment not expressly approved by Würth Elektronik eiSos may void the FCC authorization to operate this equipment.

23.7.1. FCC certificate


TCB	<p>GRANT OF EQUIPMENT AUTHORIZATION</p> <p>Certification Issued Under the Authority of the Federal Communications Commission</p> <p>By:</p> <p>CTC advanced GmbH (former CETECOM ICT Services GmbH) Unterkerkhimer Strasse 6-10 66117 Saarbrücken, Germany</p> <p>Date of Grant: 10/31/2018 Application Dated: 10/31/2018</p>	TCB										
<p>Würth Elektronik eiSos GmbH & Co KG Max-Eyth-Strasse 1 Waldenburger, 74638 Germany</p> <p>Attention: Gudrun Eckhardt, Manager</p>												
<p>NOT TRANSFERABLE</p> <p>EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.</p>												
<table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">FCC IDENTIFIER:</td> <td style="background-color: #cccccc;">R7TAMB2623</td> </tr> <tr> <td>Name of Grantee:</td> <td style="background-color: #cccccc;">Würth Elektronik eiSos GmbH & Co KG</td> </tr> <tr> <td>Equipment Class:</td> <td>Digital Transmission System</td> </tr> <tr> <td>Notes:</td> <td>Bluetooth S radio module AMB2623</td> </tr> <tr> <td>Modular Type:</td> <td>Single Modular</td> </tr> </table>			FCC IDENTIFIER:	R7TAMB2623	Name of Grantee:	Würth Elektronik eiSos GmbH & Co KG	Equipment Class:	Digital Transmission System	Notes:	Bluetooth S radio module AMB2623	Modular Type:	Single Modular
FCC IDENTIFIER:	R7TAMB2623											
Name of Grantee:	Würth Elektronik eiSos GmbH & Co KG											
Equipment Class:	Digital Transmission System											
Notes:	Bluetooth S radio module AMB2623											
Modular Type:	Single Modular											
<p>Grant Notes:</p> <p>Output power listed is peak conducted.</p> <p>Operation with integrated PCB antenna or external dipole antenna AMB1926.</p>	<table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">FCC Rule Parts</td> <td style="width: 30%;">Frequency Range (MHz)</td> <td style="width: 20%;">Output Watts</td> <td style="width: 20%;">Frequency Tolerance</td> <td style="width: 10%;">Emission Designator</td> </tr> <tr> <td>15C</td> <td>2402.0 - 2480.0</td> <td>0.0022</td> <td></td> <td></td> </tr> </table>	FCC Rule Parts	Frequency Range (MHz)	Output Watts	Frequency Tolerance	Emission Designator	15C	2402.0 - 2480.0	0.0022			
FCC Rule Parts	Frequency Range (MHz)	Output Watts	Frequency Tolerance	Emission Designator								
15C	2402.0 - 2480.0	0.0022										

Figure 24: FCC certificate

23.8. IC Compliance Statement (Canada)

Certification Number: 5136A-AMB2623

HVIN: AMB2623

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

23.8.1. IC certificate

Technical Acceptance Certificate - Canada



member of RWTÜV group

Certificate Holder:	Würth Elektronik eiSos GmbH & Co Max-Eyth-Str. 1 74638 Waldenburg Germany	 <small>Bundesnetzagentur BNZaA-CAB-03/22-51 authorized by the German Government to act as CAB in accordance with the IMTA EU Canada of 1st November 1998.</small>
ISED Certification Number:	5136A-AMB2623	
CTC Registration Number:	2044	
OATS Facility ID Number:	3462C-1	
OATS Facility:	CTC advanced GmbH Untertuerkheimer Str. 6 -10 66117 Saarbrücken Germany Phone: +49 681 598-0 Fax: +49 681 598-8775 Email: info@ctcadvanced.com	
Product Description:	Bluetooth 5 radio module AMB2623	

Certification of equipment means only that the equipment has met the requirements of the above-noted specification. Licence applications, where applicable to use certified equipment, are acted on accordingly by the ISED issuing office and will depend on the existing radio environment, service and location of operation. This certificate is issued on condition that the holder complies and will continue to comply with the requirements and procedures issued by ISED. The equipment for which this certificate is issued shall not be manufactured, imported, distributed, leased, offered for sale or sold unless the equipment complies with the applicable technical specifications and procedures issued by ISED.

La certification du matériel signifie seulement que le matériel a satisfait aux exigences de la norme indiquée ci-dessus. Les demandes de licences nécessaires pour l'utilisation du matériel certifié sont traitées en conséquence par le bureau de délivrance d'ISDE et dépendent des conditions radio ambiantes, du service et de l'emplacement d'exploitation. Le présent certificat est délivré à la condition que le titulaire satisfasse et continue de satisfaire aux exigences et aux procédures d'ISDE. Le matériel à l'égard duquel le présent certificat est délivré ne doit pas être fabriqué, importé, distribué, loué, mis en vente ou vendu à moins d'être conforme aux procédures et aux spécifications techniques applicables publiées par ISDE.

I hereby attest that the subject equipment was tested and found in compliance with the above-noted specification.
 J'atteste par la présente que le matériel a fait l'objet d'essai et jugé conforme à la spécification ci-dessus.


FOREIGN CERTIFICATION BODY
CAB ID NO DE0001

CTC advanced GmbH
 Saarbrücken

CTC advanced GmbH
 Certification Body

Figure 25: IC certificate

23.9. TELEC radio law approval (Japan)

Japanese Radio Law Compliance



ID-Code
(Interference
provision)

This device has passed the Radio Law approval for Japan through the registered certification body TELEC. The corresponding ARIB (Association of Radio Industries and Businesses) standard has been applied. Accordingly, the market approval is given by the MIC (Ministry of Internal Affairs and Communications).

This device should not be modified (otherwise the granted designation number will become invalid)

The MAC address of the radio device maintains the format 00:18:DA:xx:xx:xx. The latter part xx:xx:xx of the MAC address coincides with the serial number of the device.

23.9.1. Label

Due to the size of the Proteus-II label, the certification label of the Proteus-II is not placed onto the module label.

AMB2621,
2608011024000,
2608011024010:



R 202-LSG026

AMB2621-1,
2608011124000,
2608011124010:



R 202-LSG029



The Certification Number 202-LSG026 is valid for the two products 2608011024000 and 2608011024010 (Proteus-I and -II with integrated antenna) due to the fact, that the products are identical in all relevant radio approval parameters.



The Certification Number 202-LSG029 is valid for the two products 2608011124000 and 2608011124010 (Proteus-I and -II with external antenna) due to the fact, that the products are identical in all relevant radio approval parameters.



After integration of the Proteus-II (2608011024010, 2608011124010) in the end device, the corresponding certification label must be recognized from the outside. Otherwise this information must be referenced on the housing as well as in the user manual. E labeling is allowed.

23.9.2. Certified antennas

The Proteus-II is pre-certified with the following antennas.

Product	Certified antennas
Proteus-II (2608011024010)	PCB antenna included in the Proteus-II
Proteus-II (2608011124010)	260013021 (AMB1926) - 2.4 GHz dipole antenna ¹ as specified in chapter 15.3.4.1

¹Additional, not yet certified, antennas must be re-certified without retesting. Only antenna gain and antenna characteristic diagrams must be specified. Please contact your Business Development Engineer (BDM) to get support in certifying your own antenna.

Figure 26: TELEC certificate (internal antenna)

CTC advanced GmbH Untertürkheimer Strasse 6-10, D-66117 Saarbrücken, Germany		CTC  advanced member of RWTÜV group
Conformity Assessment Body Registered Certification Body for Japan		
認証書 TYPE - BASED CERTIFICATE		
Approval Holder 認証を受けた者	Würth Elektronik eiSos GmbH & Co KG Max-Eyth-Str. 1 74638 Waldenburg Germany	
Manufacturer Name 製造者名	Würth Elektronik eiSos GmbH & Co KG Max-Eyth-Str. 1 74638 Waldenburg Germany	
Model Name 型式又は名称	AMB2621-1, 2608011124000, 2608011124010	
Classification of Specified Radio equipment 特定無線設備の種類	Ordinance concerning Technical Regulations Conformity Certification etc. of Specified Radio Equipment 特定無線設備の技術基準適合証明等に関する規則 第 2 条第 1 項第 19 号に掲げる無線設備 Low power data communications system in the 2.4GHz band	
Type of Emissions, Frequency and Antenna Power 電波の形式、周波数及び空中線電力	F1D 2402 ~ 2480MHz (2MHz separation, 40 channels) 0.0012W	
Certified Number 認証番号	202-LSG029	
Certified Date 認証年月日	2020-05-28	
<p>上記のとおり、電波法第 38 条の 24 第 1 項の規定に基づく認証を行ったものであることを証する。 This is to certify that the above-mentioned certification by type has been granted in accordance with the provisions of Article 38-24, Paragraph 1 of the Radio Law.</p>		
Recognized by The Ministry of Internal Affairs and Communications (MIC) via Bundesnetzagentur BNNetzA-CAB-03/25-51  BNetzA-CAB-03/25-51		CTC advanced GmbH Stefan Mann <i>Signature</i>

Page 1of 1

Figure 27: TELEC certificate (external antenna)

23.10. FCC and IC requirements to OEM integrators

This module has been granted modular approval. OEM integrators for host products may use the module in their final products without additional FCC/IC (Industry Canada) certification if they meet the following conditions. Otherwise, additional FCC/IC approvals must be obtained. The host product with the module installed must be evaluated for simultaneous transmission requirements.

- The users manual for the host product must clearly indicate the operating requirements and conditions that must be observed to ensure compliance with current FCC/IC RF exposure guidelines.
- To comply with FCC/IC regulations limiting both maximum RF output power and human exposure to RF radiation, the maximum antenna gain including cable loss in a mobile-only exposure condition must not exceed 2dBi.
- A label must be affixed to the outside of the host product with the following statements:
This device contains FCCID: R7TAMB2623
This equipment contains equipment certified under ICID: 5136A-AMB2623
- The final host / module combination may also need to be evaluated against the FCC Part 15B criteria for unintentional radiators in order to be properly authorized for operation as a Part 15 digital device.
- If the final host / module combination is intended for use as a portable device (see classifications below) the host manufacturer is responsible for separate approvals for the SAR requirements from FCC Part 2.1093 and RSS-102.

OEM requirements:

The OEM must ensure that the following conditions are met.

- End users of products, which contain the module, must not have the ability to alter the firmware that governs the operation of the module. The agency grant is valid only when the module is incorporated into a final product by OEM integrators.
- The end-user must not be provided with instructions to remove, adjust or install the module.
- The Original Equipment Manufacturer (OEM) must ensure that FCC labeling requirements are met. This includes a clearly visible label on the outside of the final product. Attaching a label to a removable portion of the final product, such as a battery cover, is not permitted.
- The label must include the following text:
Contains FCC ID: R7TAMB2623
The enclosed device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(i.) this device may not cause harmful interference and
(ii.) this device must accept any interference received, including interference that may cause undesired operation.

When the device is so small or for such use that it is not practicable to place the statement above on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

- The user manual for the end product must also contain the text given above.
 - Changes or modifications not expressly approved could void the user's authority to operate the equipment.
 - The OEM must ensure that timing requirements according to 47 CFR 15.231(a-c) are met.
 - The OEM must sign the OEM Modular Approval Agreement.
 - The module must be used with only the following approved antenna(s).

23.10.1. Pre-certified antennas

The Proteus-II is pre-certified with the following antennas.


Product	Certified antenna
Proteus-II (260801102401x, AMB2623)	PCB antenna included in the Proteus-II
Proteus-II (260801112401x, AMB2623-1)	260013021 (AMB1926) - 2.4 GHz dipole antenna as specified in chapter 15.3.4.1


23.11. ETA-WPC (India)-Proteus-II (2608011024010)

Registration No: ETA-SD-20230807138 Date: 25-08-2023

The Proteus-II complies with the provisions on the Equipment Type Approval WPC Wing for India.

23.11.1. ETA-WPC certificate





Government of India
Ministry of Communications
Department of Telecommunications
WPC Wing
Sanchar Bhawan, New Delhi-110001.

[Generation of Equipment Type Approval (ETA) through self-declaration issued under O.M. No. ETA-WPC /Policy/2018-19 dated 26 February, 2019].

THIS ETA IS ISSUED FOR A SINGLE MODEL WITH MODEL NAME Proteus-II (2608011024010)

Registration No: ETA-SD-20230807138 Date: 25-08-2023

I). Details of Applicant and Parameters of Equipment:

1.	Name & Address of the first Applicant. (Indian Manufacturer/ Authorised Indian representative for foreign manufacturer)	WURTH ELECTRONICS SERVICES INDIA PRIVATE LIMITED, Ground and 1st Floor, No. 3, Prestige Sterling Square, Madras Bank Road, Next to Airlines Hotel, Bangalore, Bengaluru Bangalore Urban, Karnataka, 560001, Bangalore Urban,KARNATAKA,560001
2.	Equipment category	Bluetooth Low Energy Module
3.	Make	Wurth Elektronik eiSos GmbH & Co. KG,Germany
4.	Model	Proteus-II (2608011024010)
5.	Frequency range(s) of Equipment	1. 2402-2480 MHz
6.	Max output power/Field strength/PSD	1. E.I.R.P. (dBm). -2

1 / 2

Figure 28: ETA-WPC certificate page 1

7.	Applicable Gazette Notification(s)	1. 45 (E) Dated 28-01-2005	
8.	RF Test Report details:-		
	Name&Address /Country of accredited laboratory issuing the RF test report	Accreditation Certificate Reference/Number	Test Report No. and Date
	CTC advanced GmbH & Untertuerkheimer Strasse 6 10 66117 Saarbruecken / Germany	D-PL-12076-01-03	1-9813/20-04-02 & 29-09-2020

II). Terms and Conditions

- (i). This certificate will not be valid in case any change in the above parameters and not conforming to the Gazette Notification mentioned in sl.no 7 above.
- (ii). Use of such equipment has been exempted from licensing requirement vide Gazette Notification mentioned in sl. no. 7, on Non-interference,Non-protectionand sharing (non-exclusive) basis.
- (iii). Use of such equipment in case not conforming to above notification will require a specific wireless operating license, as applicable from this Ministry.
- (iv). Field units of WPC Wing reserve the right for sample check/audit carried out for the purpose of RF analysis/spectrum monitoring in view to avoid interference to other wireless users and ensure compliance of technical parameters mentioned in sl no. 5,6&7.
- (v). This certificate is valid only for equipment which are exempted from import licensing requirements as per the Import Policy of DGFT and for import of such device, a self-declaration based, system generated (Saralsanchar) Import undertaking/ permission is required.
- (vi). The applicant is liable for prosecution under Indian Law in case of any wrong declaration/ submission of ingenuine RF test report(s) for issue of ETA through Self-Declaration.

Note:

1. Once ETA through self-declaration is generated for a model, subsequently it may be utilized by other person(s) for import/usage purpose in India.
2. The importers of above model shall comply with other import related requirements, if any, with Customs.

This is Self-generated certificate. Hence, no signature is required. It may be downloaded/verified from the website <https://saralsanchar.gov.in>.

2 / 2

Figure 29: ETA-WPC certificate page 2


Product	Certified antenna	Max output power -E.I.R.P (dBm)
Proteus-II (260801102401x, AMB2623)	PCB antenna included in the Proteus-II	-2


23.12. ETA-WPC (India)-Proteus-II (2608011124010)

Registration No: ETA-SD-20230807338 Date: 25-08-2023

The Proteus-II complies with the provisions on the Equipment Type Approval WPC Wing for India.

23.12.1. ETA-WPC certificate





Government of India
Ministry of Communications
Department of Telecommunications
WPC Wing
Sanchar Bhawan, New Delhi-110001.

[Generation of Equipment Type Approval (ETA) through self-declaration issued under O.M. No. ETA-WPC /Policy/2018-19 dated 26 February, 2019].

THIS ETA IS ISSUED FOR A SINGLE MODEL WITH MODEL NAME Proteus-II (2608011124010)

Registration No: ETA-SD-20230807338 Date: 25-08-2023

I). Details of Applicant and Parameters of Equipment:

1.	Name & Address of the first Applicant. (Indian Manufacturer/ Authorised Indian representative for foreign manufacturer)	WURTH ELECTRONICS SERVICES INDIA PRIVATE LIMITED, Ground and 1st Floor, No. 3, Prestige Sterling Square, Madras Bank Road, Next to Airlines Hotel, Bangalore, Bengaluru Bangalore Urban, Karnataka, 560001, Bangalore Urban,KARNATAKA,560001
2.	Equipment category	Bluetooth Low Energy Module
3.	Make	Wurth Elektronik eiSos GmbH & Co. KG,Germany
4.	Model	Proteus-II (2608011124010)
5.	Frequency range(s) of Equipment	1. 2402-2480 MHz
6.	Max output power/Field strength/PSD	1. E.I.R.P. (dBm). 5.8

1 / 2

Figure 30: ETA-WPC certificate page 1

7.	Applicable Gazette Notification(s)	1. 45 (E) Dated 28-01-2005	
8.	RF Test Report details:-		
	Name&Address /Country of accredited laboratory issuing the RF test report	Accreditation Certificate Reference/Number	Test Report No. and Date
	CTC advanced GmbH & Untertuerkheimer Strasse 6 10 66117 Saarbruecken / Germany	D-PL-12076-01-03	1-9813/20-04-02 & 29-09-2020

II). Terms and Conditions

- (i). This certificate will not be valid in case any change in the above parameters and not conforming to the Gazette Notification mentioned in sl.no 7 above.
- (ii). Use of such equipment has been exempted from licensing requirement vide Gazette Notification mentioned in sl. no. 7, on Non-interference,Non-protectionand sharing (non-exclusive) basis.
- (iii). Use of such equipment in case not conforming to above notification will require a specific wireless operating license, as applicable from this Ministry.
- (iv). Field units of WPC Wing reserve the right for sample check/audit carried out for the purpose of RF analysis/spectrum monitoring in view to avoid interference to other wireless users and ensure compliance of technical parameters mentioned in sl no. 5,6&7.
- (v). This certificate is valid only for equipment which are exempted from import licensing requirements as per the Import Policy of DGFT and for import of such device, a self-declaration based, system generated (Saralsanchar) Import undertaking/ permission is required.
- (vi). The applicant is liable for prosecution under Indian Law in case of any wrong declaration/ submission of ingenuine RF test report(s) for issue of ETA through Self-Declaration.

Note:

1. Once ETA through self-declaration is generated for a model, subsequently it may be utilized by other person(s) for import/usage purpose in India.
2. The importers of above model shall comply with other import related requirements, if any, with Customs.

This is Self-generated certificate. Hence, no signature is required. It may be downloaded/verified from the website <https://saralsanchar.gov.in>.

2 / 2

Figure 31: ETA-WPC certificate page 2

Product	Certified antenna	Max output power -E.I.R.P (dBm)
Proteus-II (260801112401x, AMB2623-1)	2600130021 - Himalia as specified in chapter 15.3.1	5.8

23.13. NCC Compliance Statement (Taiwan)

NCC Certification ID: CCAF23Y10140T2

The Proteus-II with integrated antenna complies with the provisions on the National Communications Commission of Taiwan.


Due to the small size of the Proteus-II label the NCC Certification ID is placed on the packaging label.

23.13.1. NCC certificate

耕興股份有限公司

電信管制射頻器材型式認證證明

證照字號：型式字第 AF 號

一、申請者：	伍仕電子股份有限公司
二、地址：	臺北市內湖區民權東路6段18之1號4樓
三、製造廠商：	WE, Würth Elektronik or Würth Elektronik eiSos
四、器材名稱：	Bluetooth 5.0 module T&R
五、廠牌：	Würth Electronics Co., Ltd.
六、型號：	2608011024010
七、發射功率（電場強度）：	詳如備註表格
八、工作頻率：	詳如備註表格
九、審驗日期：	112年8月3日
十、審驗合格標籤式樣：	

十一、警語或標示要求：（器材本體、使用手冊、外包裝盒等應遵守下列標示要求）

- 請依上列型號、標籤式樣於電信管制射頻器材本體明顯處標示其型號及審驗合格標籤，並於包裝盒標示主管機關標章。
- 最終產品應於本體明顯處標示非隨插即用射頻模組（組件）之審驗合格標籤及最終產品型號，並於包裝盒標示主管機關標章。
- 電信管制射頻器材應依本會或相關技術規範規定於指定位置標示中文警語。
- 經授權使用射頻模組（組件）之審驗合格標籤者，應於最終產品說明書及包裝盒提供充分與正確之資訊。
- 於國際網路販賣取得審驗證明之電信管制射頻器材者，應於該國際網路網頁提供審驗合格標籤或符合性聲明標籤資訊。
- 使用手冊應標示下列資訊：
(1) 取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。
前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

十二、特殊記載事項：

- 經取得審驗證明之電信管制射頻器材，如變更其廠牌、型號、技術規格或射頻性能時，除電信管制射頻器材審驗管理辦法另有規定外，應重新申請審驗。
- 經取得審驗證明之審驗證明之電信管制射頻器材或非隨插即用射頻模組（組件），於電信管制射頻器材相關技術規範修訂審驗相關章節時，應依技術規範明定之實施期限，申請重新審驗辦理，未依規定重新審驗者，原驗證機關（構）得廢止其審驗證明。
- 取得型式認證證明、符合性聲明證明或簡易符合性聲明證明者，應妥善保管申請審驗之電信管制射頻器材或非隨插即用射頻模組（組件）、外接電源、配件、外接天線、與檢驗報告或測試報告相符之測試治具及與檢驗報告或測試報告使用相同版本之測試軟體至該器材停止生產或停止輸入後五年。
- 取得型式認證證明或符合性聲明證明者得授權他人於同廠牌同型號之電信管制射頻器材或非隨插即用射頻模組（組件）使用審驗合格標籤或符合性聲明標籤，授權他人使用審驗合格標籤或符合性聲明標籤由取得審驗證明者於主管機關指定網站登錄或委託原驗證機關（構）登錄。
- 以取得審驗證明之完全射頻模組（組件）組裝成完全最終產品後，取得該完全射頻模組（組件）之審驗證明者，應於該完全最終產品販賣前，檢附標註完全最終產品廠牌、型號及外觀照片之電子檔案並應提供組裝該完全射頻模組（組件）之完全最終產品其內部及電路板4x6吋以上具尺規之至少二面彩色照片，電路板主要元件須清晰可辨識。向原驗證機關（構）登錄。

說明：

(一) 本公司係依電信管理法第87條第2項及第3項規定訂定之電信管制射頻器材測試機構及驗證機構管理辦法第4條第1項規定，經認證組織（財團法人全國認證基金會）認可產品驗證制度符合 CNS 17065 或 ISO/IEC 17065 標準（TAF 標準編號：PC006），並經國家通訊傳播委員會委託辦理電信管制射頻器材之審驗工作。（機構地址：桃園市龜山區華亞一路52號、電話：03-3273456），核發本型式認證證明。

(二) 本設備之製造或輸入須遵守電信管理法相關規定。

(續下頁，續頁分開使用無誤)

第 1 頁 共 2 頁

Figure 32: NCC certificate page 1

(三) 配件資訊:

名稱	廠牌/型號	備註
充電器	無此配件	-
鋰電池	無此配件	-
充電線	無此配件	-
其他	無此配件	-

備註:

1. 依「商品標示法」及「電器及電子商品標示基準」規定，標示事項貼於商品或內外包裝上，以免違法而受處分。

2. 本型式認證證明僅代表完成電信管制射頻器材審驗管理辦法所訂之審驗程序其審驗範圍僅限本器材之無線射頻硬體功能，不作為其他(如器材之資通安全檢測、產地等)認可證明。

3. 本器材電信介面使用天線資訊如下:

Ant.	廠牌	型號	天線型式	天線增益
Antenna	伍仕電子	2608011024010	PCB Antenna	-7.2 dBi

4. 本設備之電信介面符合技術規範及工作頻段資訊如下。

電信介面	技術規範(年份)	章節	工作頻率	功率 or 場強	備註
Bluetooth	LP0002(109 年版)	4.10	2402~2480MHz	-6.10 dBm	BT LE GFSK

BW=Bandwidth

中華民國 1 1 2 年 8 月 3 日

以下空白

第 2 頁 共 2 頁

Figure 33: NCC certificate page 2

24. References

- [1] Bluetooth®. Bluetooth® Core Specification, version 5.0. <https://www.bluetooth.com/specifications/specs/core-specification-5/>.
- [2] Würth Elektronik. Application note 6 - Proteus high throughput mode. <http://www.we-online.com/ANR006>.
- [3] Würth Elektronik. Application note 5 - Proteus-II advanced developer guide. <http://www.we-online.com/ANR005>.
- [4] Würth Elektronik. WE UART Terminal PC tool (Smart Commander). <https://www.we-online.de/wcs-software>.
- [5] Würth Elektronik. Application note 4 - Proteus peripheral only mode. <http://www.we-online.com/ANR004>.
- [6] Nordic Semiconductor. nRF Device Firmware Update app for Android. <https://play.google.com/store/apps/details?id=no.nordicsemi.android.dfu>.
- [7] Nordic Semiconductor. nRF Device Firmware Update app for iOS. <https://apps.apple.com/us/app/device-firmware-update/id1624454660>.
- [8] Würth Elektronik. Application note 27 - Bluetooth listing guide. <http://www.we-online.com/ANR027>.

25. Important notes

The following conditions apply to all goods within the wireless connectivity and sensors product range of Würth Elektronik eiSos GmbH & Co. KG:

General customer responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to the customer to evaluate, where appropriate to investigate and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not. Accordingly, the customer is cautioned to verify that the documentation is current before placing orders.

Customer responsibility related to specific, in particular safety-relevant applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. The same statement is valid for all software source code and firmware parts contained in or used with or for products in the wireless connectivity and sensor product range of Würth Elektronik eiSos GmbH & Co. KG. In certain customer applications requiring a high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health, it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Best care and attention

Any product-specific data sheets, manuals, application notes, PCNs, warnings and cautions must be strictly observed in the most recent versions and matching to the products revisions. These documents can be downloaded from the product specific sections on the wireless connectivity and sensors homepage.

Customer support for product specifications

Some products within the product range may contain substances, which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case, the Business Development Engineer (BDM) or the internal sales person in charge should be contacted who will be happy to support in this matter.

Product improvements

Due to constant product improvement, product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard, we inform about major changes. In case of further queries regarding the PCN, the Business Development Engineer (BDM), the internal sales person or the technical support team in charge should be contacted. The basic responsibility of the customer as per section 25 and 25 remains unaffected.

All software like "wireless connectivity SDK", "Sensor SDK" or other source codes as well as all PC software tools are not subject to the Product Change Notification information process.

Product life cycle

Due to technical progress and economical evaluation, we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this, we cannot ensure that all products within our product range will always be available. Therefore, it needs to be verified with the Business Development Engineer (BDM) or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

Property rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG. Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

General terms and conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

26. Legal notice

Exclusion of liability

Würth Elektronik eiSos GmbH & Co. KG considers the information in this document to be correct at the time of publication. However, Würth Elektronik eiSos GmbH & Co. KG reserves the right to modify the information such as technical specifications or functions of its products or discontinue the production of these products or the support of one of these products without any written announcement or notification to customers. The customer must make sure that the information used corresponds to the latest published information. Würth Elektronik eiSos GmbH & Co. KG does not assume any liability for the use of its products. Würth Elektronik eiSos GmbH & Co. KG does not grant licenses for its patent rights or for any other of its intellectual property rights or third-party rights.

Notwithstanding anything above, Würth Elektronik eiSos GmbH & Co. KG makes no representations and/or warranties of any kind for the

provided information related to their accuracy, correctness, completeness, usage of the products and/or usability for customer applications. Information published by Würth Elektronik eiSos GmbH & Co. KG regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof.

Suitability in customer applications

The customer bears the responsibility for compliance of systems or units, in which Würth Elektronik eiSos GmbH & Co. KG products are integrated, with applicable legal regulations. Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Würth Elektronik eiSos GmbH & Co. KG components in its applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos GmbH & Co. KG. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences lessen the likelihood of failures that might cause harm and take appropriate remedial actions. The customer will fully indemnify Würth Elektronik eiSos GmbH & Co. KG and its representatives against any damages arising out of the use of any Würth Elektronik eiSos GmbH & Co. KG components in safety-critical applications.

Trademarks

AMBER wireless is a registered trademark of Würth Elektronik eiSos GmbH & Co. KG. All other trademarks, registered trademarks, and product names are the exclusive property of the respective owners.

Usage restriction

Würth Elektronik eiSos GmbH & Co. KG products have been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover, Würth Elektronik eiSos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Würth Elektronik eiSos GmbH & Co. KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component, which is used in electrical circuits that require high safety and reliability function or performance. By using Würth Elektronik eiSos GmbH & Co. KG products, the customer agrees to these terms and conditions.

27. License terms

These License terms will take effect upon the purchase and usage of the Würth Elektronik eiSos GmbH & Co. KG wireless connectivity products. You hereby agree that these license terms are applicable to the product and the incorporated software, firmware and source codes (collectively, "Software") made available by Würth Elektronik eiSos in any form, including but not limited to binary, executable or source code form. The software included in any Würth Elektronik eiSos wireless connectivity product is purchased to you on the condition that you accept the terms and conditions of these license terms. You agree to comply with all provisions under these license terms.

Limited license

Würth Elektronik eiSos hereby grants you a limited, non-exclusive, non-transferable and royalty-free license to use the software and under the conditions that will be set forth in these license terms. You are free to use the provided software only in connection with one of the products from Würth Elektronik eiSos to the extent described in these license terms. You are entitled to change or alter the source code for the sole purpose of creating an application embedding the Würth Elektronik eiSos wireless connectivity product. The transfer of the source code to third parties is allowed to the sole extent that the source code is used by such third parties in connection with our product or another hardware provided by Würth Elektronik eiSos under strict adherence of these license terms. Würth Elektronik eiSos will not assume any liability for the usage of the incorporated software and the source code. You are not entitled to transfer the source code in any form to third parties without prior written consent of Würth Elektronik eiSos.

You are not allowed to reproduce, translate, reverse engineer, decompile, disassemble or create derivative works of the incorporated software and the source code in whole or in part. No more extensive rights to use and exploit the products are granted to you.

Usage and obligations

The responsibility for the applicability and use of the Würth Elektronik eiSos wireless connectivity product with the incorporated firmware in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to you to evaluate and investigate, where appropriate, and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for your respective application or not.

You are responsible for using the Würth Elektronik eiSos wireless connectivity product with the incorporated firmware in compliance with all applicable product liability and product safety laws. You acknowledge to minimize the risk of loss and harm to individuals and bear the risk for failure leading to personal injury or death due to your usage of the product.

Würth Elektronik eiSos' products with the incorporated firmware are not authorized for use in safety-critical applications, or where a failure of the product is reasonably expected to cause severe personal injury or death. Moreover, Würth Elektronik eiSos' products with the incorporated firmware are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. You shall inform Würth Elektronik eiSos about the intent of such usage before design-in stage. In certain customer applications requiring a very high level of safety and in which the malfunction or failure of an electronic component could endanger human life or health, you must ensure to have all necessary expertise in the safety and regulatory ramifications of your applications. You acknowledge and agree that you are solely responsible for all legal, regulatory and safety-related requirements concerning your products and any use of Würth Elektronik eiSos' products with the incorporated firmware in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos. **YOU SHALL INDEMNIFY WÜRTH ELEKTRONIK EISOS AGAINST ANY DAMAGES ARISING OUT OF THE USE OF WÜRTH ELEKTRONIK EISOS' PRODUCTS WITH THE INCORPORATED FIRMWARE IN SUCH SAFETY-CRITICAL APPLICATIONS.**

Ownership

The incorporated firmware created by Würth Elektronik eiSos is and will remain the exclusive property of Würth Elektronik eiSos.

Firmware update(s)

You have the opportunity to request the current and actual firmware for a bought wireless connectivity product within the time of warranty. However, Würth Elektronik eiSos has no obligation to update a modules firmware in their production facilities, but can offer this as a service on request. The upload of firmware updates falls within your responsibility, e.g. via ACC or another software for firmware updates. Firmware updates will not be communicated automatically. It is within your responsibility to check the current version of a firmware in the latest version of the product manual on our website. The revision table in the product manual provides all necessary information about firmware updates. There is no right to be provided with binary files, so called "firmware images", those could be flashed through JTAG, SWD, Spi-Bi-Wire, SPI or similar interfaces.

Disclaimer of warranty

THE FIRMWARE IS PROVIDED "AS IS". YOU ACKNOWLEDGE THAT WÜRTH ELEKTRONIK EISOS MAKES NO REPRESENTATIONS AND WARRANTIES OF ANY KIND RELATED TO, BUT NOT LIMITED TO THE NON-INFRINGEMENT OF THIRD PARTIES' INTELLECTUAL PROPERTY RIGHTS OR THE MERCHANTABILITY OR FITNESS FOR YOUR INTENDED PURPOSE OR USAGE. WÜRTH ELEKTRONIK EISOS DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE, EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT RELATING TO ANY COMBINATION, MACHINE, OR PROCESS IN WHICH THE WÜRTH ELEKTRONIK EISOS' PRODUCT WITH THE INCORPORATED FIRMWARE IS USED. INFORMATION PUBLISHED BY WÜRTH ELEKTRONIK EISOS REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE A LICENSE FROM WÜRTH ELEKTRONIK EISOS TO USE SUCH PRODUCTS OR SERVICES OR A WARRANTY OR ENDORSEMENT THEREOF.

Limitation of liability

Any liability not expressly provided by Würth Elektronik eiSos shall be disclaimed.

You agree to hold us harmless from any third-party claims related to your usage of the Würth Elektronik eiSos' products with the incorporated firmware, software and source code. Würth Elektronik eiSos disclaims any liability for any alteration, development created by you or your customers as well as for any combination with other products.

Applicable law and jurisdiction

Applicable law to these license terms shall be the laws of the Federal Republic of Germany. Any dispute, claim or controversy arising out of or relating to these license terms shall be resolved and finally settled by the court competent for the location of Würth Elektronik eiSos registered office.

Severability clause

If a provision of these license terms is or becomes invalid, unenforceable or null and void, this shall not affect the remaining provisions of the terms. The parties shall replace any such provisions with new valid provisions that most closely approximate the purpose of the terms.

Miscellaneous

Würth Elektronik eiSos reserves the right at any time to change these terms at its own discretion. It is your responsibility to check at Würth Elektronik eiSos homepage for any updates. Your continued usage of the products will be deemed as the acceptance of the change.

We recommend you to be updated about the status of new firmware and software, which is available on our website or in our data sheet and manual, and to implement new software in your device where appropriate.

By ordering a product, you accept these license terms in all terms.

List of Figures

1.	Block diagram of the module with internal PCB antenna and antenna pad	17
2.	TX Current consumption vs. VCC	21
3.	Current consumption calculation in advertising mode with 40 ms advertising interval, UART disabled	22
4.	Measured Proteus-II transient current consumption in advertising mode with 40 ms advertising interval, excerpt of 5ms	23
5.	Pinout (top view)	26
6.	Power up	29
7.	State overview	34
8.	DTM flow chart	49
9.	Switch of the <i>BUSY</i> pin when transmitting data	142
10.	nRF Device Firmware Update app	148
a.	Select file	148
b.	Scan list	148
c.	FOTA running	148
11.	Layout	152
12.	Placement of the module with integrated antenna	153
13.	Dimensioning the antenna connection as micro strip	154
14.	Himalia dipole antenna	156
15.	Circuit diagram	158
16.	Assembly diagram	159
17.	Top & bottom Layer	159
18.	Antenna characteristic from integrated antenna measured on official EV-Board* .	160
19.	Reflow soldering profile	162
20.	Module dimensions [mm]	168
21.	Footprint WE-FP-4 [mm]	169
22.	Lot number structure	170
23.	Label of the Proteus-II	171
24.	FCC certificate	177
25.	IC certificate	178
26.	TELEC certificate (internal antenna)	181
27.	TELEC certificate (external antenna)	182
28.	ETA-WPC certificate page 1	185
29.	ETA-WPC certificate page 2	186
30.	ETA-WPC certificate page 1	187
31.	ETA-WPC certificate page 2	188
32.	NCC certificate page 1	189
33.	NCC certificate page 2	190

List of Tables

1.	Ordering information	18
2.	Recommended operating conditions	19
3.	Absolute maximum ratings	19
4.	Power consumption for 100% transmission/reception	20

5.	Radio parameters	24
6.	Output power	24
7.	Pin characteristics	25
8.	Pinout	27
15.	LED behavior of the Proteus-II	35
44.	Message overview: Requests	85
45.	Message overview: Confirmations	86
46.	Message overview: Indications	87
47.	nRF52832 IC revision overview	89
48.	Security configuration flags	98
49.	Scan configuration flags	101
50.	Beacon configuration flags	103
51.	Advertising packet configuration flags	106
52.	Table of settings	137
53.	Compatibility matrix	146
55.	Classification reflow soldering profile, Note: refer to IPC/JEDEC J-STD-020E . .	161
56.	Dimensions	167
57.	Weight	167
58.	Lot number details	170
59.	CRC8 Test Vectors	197

A. Additional CRC8 Information

This Annex gives an example CRC8 implementation and test vectors.

A.1. Example CRC8 Implementation

```
#include <stdint.h>

uint8_t Get_CRC8(uint8_t * bufP, uint16_t len)
{
    uint8_t crc = 0x00;
    for (uint16_t i = 0; i < len; i++)
    {
        crc ^= bufP[i];
    }
    return crc;
}
```

Code 1: Example CRC8 Implementation

A.2. CRC8 Test Vectors

Input data	Data length	Resulting CRC8
Null	0	0x00
0x02 0x01 0x00 0x00	4	0x03
0x02 0x87 0x01 0x00 0x16	5	0x92
0x02 0x04 0x04 0x00 0x41 0x42 0x43 0x44	8	0x06
0x02 0x88 0x07 0x00 0x00 0x55 0x00 0x00 0xDA 0x18 0x00	11	0x1A

Table 59: CRC8 Test Vectors

B. Example code for host integration

The following code is an example implementation of a function to transmit data using a 2 byte length field in the command frame. For demonstration reasons, the Proteus-III has been taken. The full function codes of all radio modules are available in the Wireless Connectivity SDK (www.we-online.com/wco-SDK).

```
#define CMD_PAYLOAD_MAX 964
typedef struct {
    uint8_t Stx;
    uint8_t Cmd;
    uint16_t Length;           /* LSB first */
    uint8_t Data[CMD_PAYLOAD_MAX+1]; /* +1 for CRC8 */
} CMD_Frame_t;

#define CMD_OFFSET_TO_DATAFIELD 4
#define CMD_OVERHEAD (CMD_OFFSET_TO_DATAFIELD+1)

bool ProteusIII_Transmit(uint8_t *PayloadP, uint16_t length)
{
    /* fill request message with STX, command byte and length field */
    CMD_Frame_t CMD_Frame;
    CMD_Frame.Stx = CMD_STX; /* 0x02 */
    CMD_Frame.Cmd = ProteusIII_CMD_DATA_REQ; /* 0x04 */
    CMD_Frame.Length = length;

    /* fill request message with user payload */
    memcpy(CMD_Frame.Data, PayloadP, length);

    /* fill request message with CRC8 */
    CMD_Frame.Data[CMD_Frame.Length] = Get_CRC8(&CMD_Frame, CMD_Frame.Length +
        CMD_OFFSET_TO_DATAFIELD);

    /* transmit full message via UART to radio module */
    UART_SendBytes(&CMD_Frame, (CMD_Frame.Length + CMD_OVERHEAD));

    /* wait for response message from radio module */
    return UART_Wait_for_Response(CMD_WAIT_TIME, ProteusIII_CMD_TXCOMPLETE_RSP,
        CMD_Status_Success, true);
}
```

Code 2: Example function implementation for radio modules with 2 byte length field

**Contact**

Würth Elektronik eiSos GmbH & Co. KG
Division Wireless Connectivity & Sensors

Max-Eyth-Straße 1
74638 Waldenburg
Germany

Tel.: +49 651 99355-0
Fax.: +49 651 99355-69
www.we-online.com/wireless-connectivity

WÜRTH ELEKTRONIK MORE THAN YOU EXPECT